

MSG36D42

SiGe HBT type

For low-noise RF amplifier

■ Features

- Compatible between high breakdown voltage and high cutoff frequency
- Low-noise, high-gain amplification
- Two elements incorporated into one package (Each transistor is separated)
- SSSMini type package, reduction of the mounting area and assembly cost


■ Basic Part Number

- MSG330D4 + MSG33002

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$


	Parameter	Symbol	Rating	Unit
Tr1	Collector-base voltage (Emitter open)	V_{CBO}	9	V
	Collector-emitter voltage (Base open)	V_{CEO}	6	V
	Emitter-base voltage (Collector open)	V_{EBO}	1	V
	Collector current	I_{C}	100	mA
Tr2	Collector-base voltage (Emitter open)	V_{CBO}	9	V
	Collector-emitter voltage (Base open)	V_{CEO}	6	V
	Emitter-base voltage (Collector open)	V_{EBO}	1	V
	Collector current	I_{C}	60	mA
Overall	Total power dissipation *	P_{T}	125	mW
	Junction temperature	T_{j}	125	$^\circ\text{C}$
	Storage temperature	T_{stg}	-55 to +125	$^\circ\text{C}$

Note) Copper plate at the collector is 5.0 mm^2 on substrate at $10\text{ mm} \times 12\text{ mm} \times 0.8\text{ mm}$.

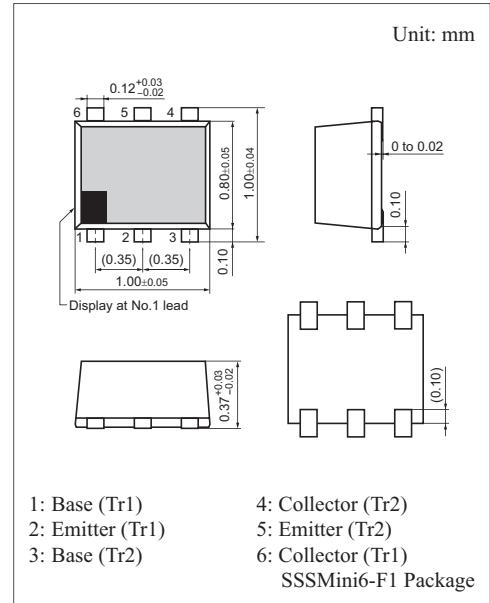

Marking Symbol: 6E

Internal Connection

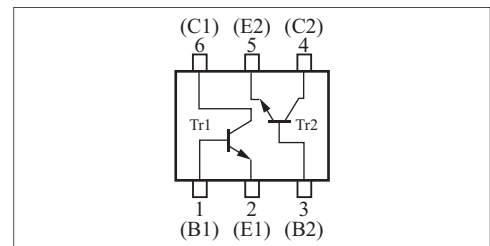

■ Electrical Characteristics $T_a = 25^\circ\text{C} \pm 3^\circ\text{C}$

• Tr1

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Collector-base cutoff current (Emitter open)	I_{CBO}	$V_{\text{CB}} = 9 \text{ V}, I_{\text{E}} = 0$			1	μA
Collector-emitter cutoff current (Base open)	I_{CEO}	$V_{\text{CE}} = 6 \text{ V}, I_{\text{B}} = 0$			1	μA
Emitter-base cutoff current (Collector open)	I_{EBO}	$V_{\text{EB}} = 1 \text{ V}, I_{\text{C}} = 0$			1	μA
Forward current transfer ratio	h_{FE}	$V_{\text{CE}} = 3 \text{ V}, I_{\text{C}} = 15 \text{ mA}$	100		220	—
Transition frequency *	f_{T}	$V_{\text{CE}} = 3 \text{ V}, I_{\text{C}} = 30 \text{ mA}, f = 2 \text{ GHz}$		14		GHz
Forward transfer gain *	$ S_{21e} ^2$	$V_{\text{CE}} = 3 \text{ V}, I_{\text{C}} = 30 \text{ mA}, f = 2 \text{ GHz}$	3.0	6.0		dB
Noise figure *	NF	$V_{\text{CE}} = 3 \text{ V}, I_{\text{C}} = 15 \text{ mA}, f = 2 \text{ GHz}$		1.6	2.2	dB
Collector output capacitance (Common base, input open circuited) *	C_{ob}	$V_{\text{CB}} = 3 \text{ V}, I_{\text{E}} = 0, f = 1 \text{ MHz}$		1.0	1.3	pF

Note) 1. Measuring methods are based on JAPANESE INDUSTRIAL STANDARD JIS C 7030 measuring methods for transistors.

2. Observe precautions for handling. Electrostatic sensitive devices.

3. *: Verified by random sampling

• Tr2


Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Collector-base cutoff current (Emitter open)	I_{CBO}	$V_{\text{CB}} = 9 \text{ V}, I_{\text{E}} = 0$			1	μA
Collector-emitter cutoff current (Base open)	I_{CEO}	$V_{\text{CE}} = 6 \text{ V}, I_{\text{B}} = 0$			1	μA
Emitter-base cutoff current (Collector open)	I_{EBO}	$V_{\text{EB}} = 1 \text{ V}, I_{\text{C}} = 0$			1	μA
Forward current transfer ratio	h_{FE}	$V_{\text{CE}} = 3 \text{ V}, I_{\text{C}} = 6 \text{ mA}$	100		220	—
Transition frequency *	f_{T}	$V_{\text{CE}} = 3 \text{ V}, I_{\text{C}} = 20 \text{ mA}, f = 2 \text{ GHz}$		19		GHz
Forward transfer gain *	$ S_{21e} ^2$	$V_{\text{CE}} = 3 \text{ V}, I_{\text{C}} = 20 \text{ mA}, f = 2 \text{ GHz}$	7.5	10.5		dB
Noise figure *	NF	$V_{\text{CE}} = 3 \text{ V}, I_{\text{C}} = 6 \text{ mA}, f = 2 \text{ GHz}$		1.4	2.0	dB
Collector output capacitance (Common base, input open circuited) *	C_{ob}	$V_{\text{CB}} = 3 \text{ V}, I_{\text{E}} = 0, f = 1 \text{ MHz}$		0.3	0.6	pF

Note) 1. Measuring methods are based on JAPANESE INDUSTRIAL STANDARD JIS C 7030 measuring methods for transistors.










2. Observe precautions for handling. Electrostatic sensitive devices.

3. *: Verified by random sampling










Common characteristics chart

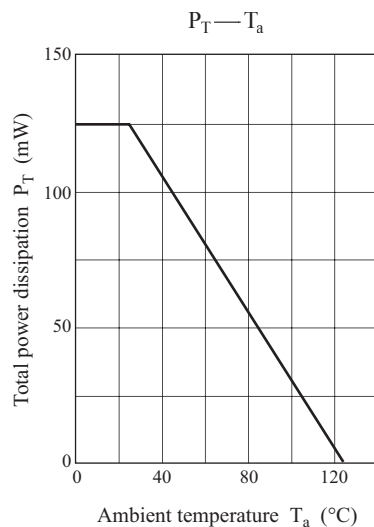

Characteristics charts of Tr1

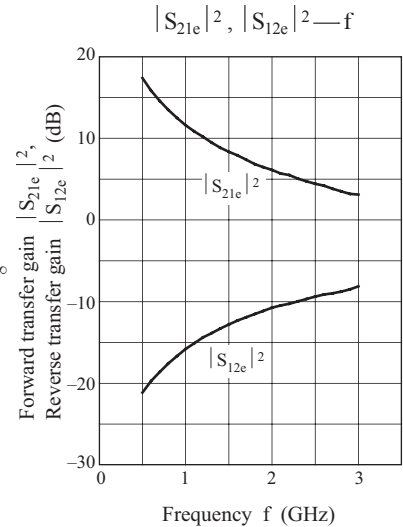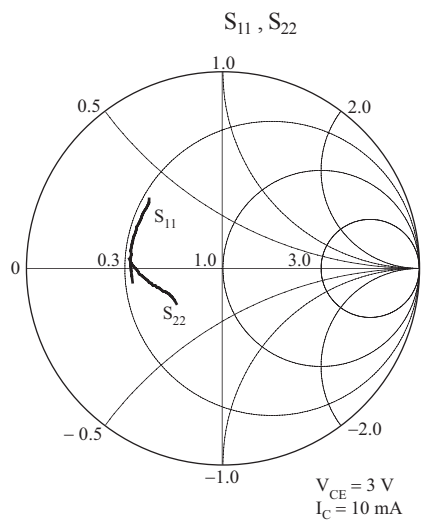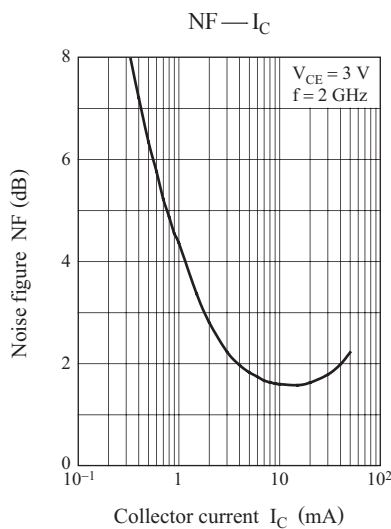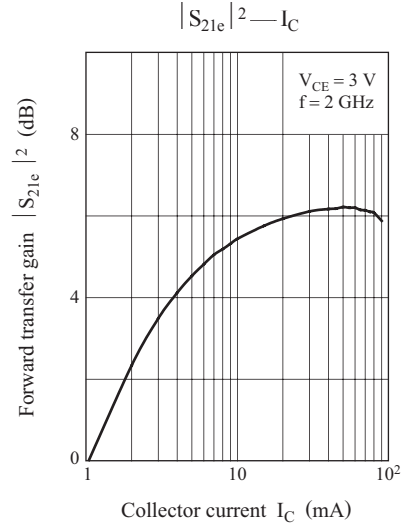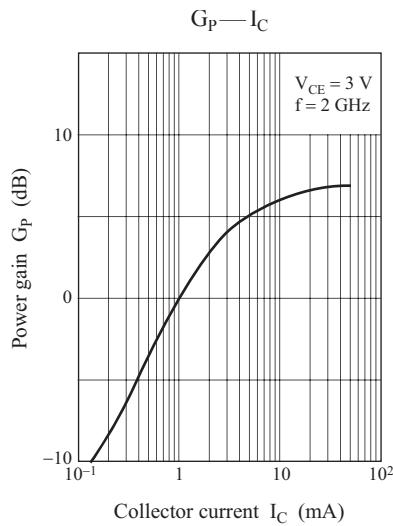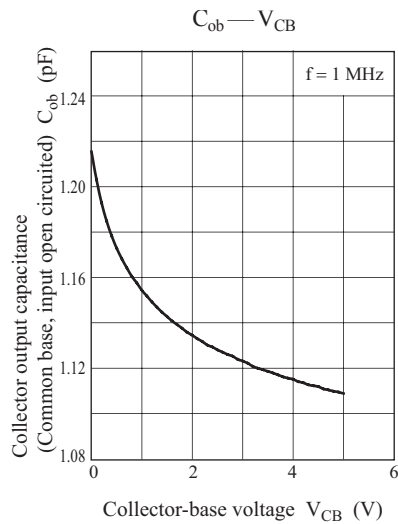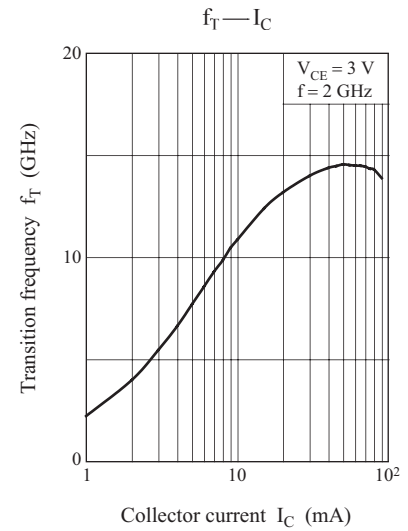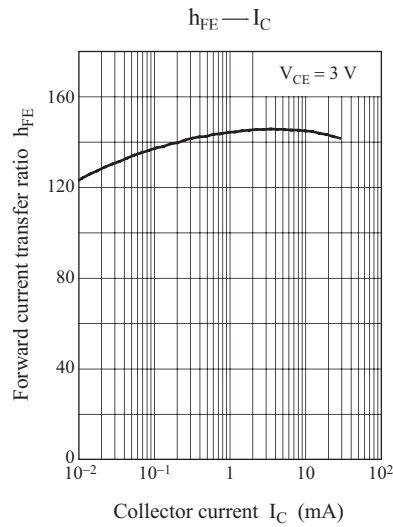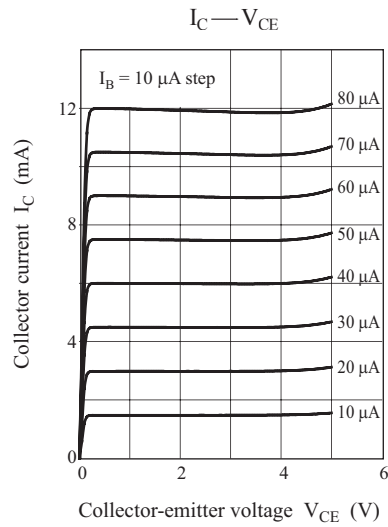

Characteristics charts of Tr2

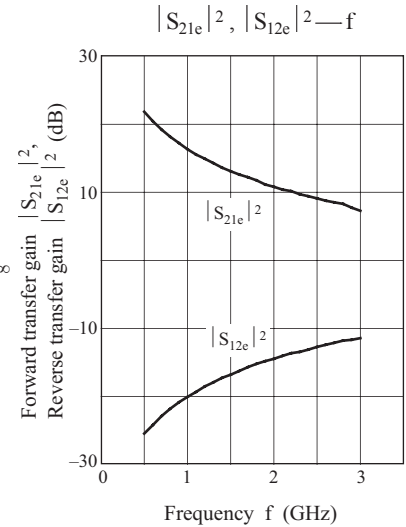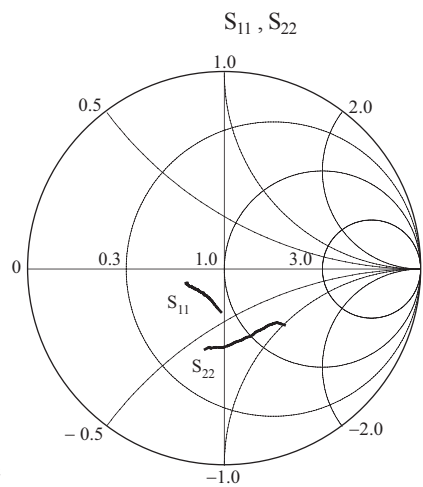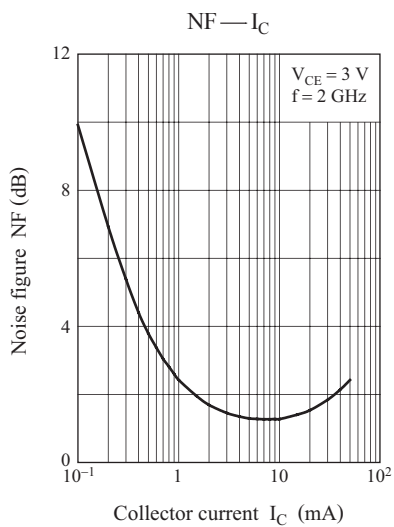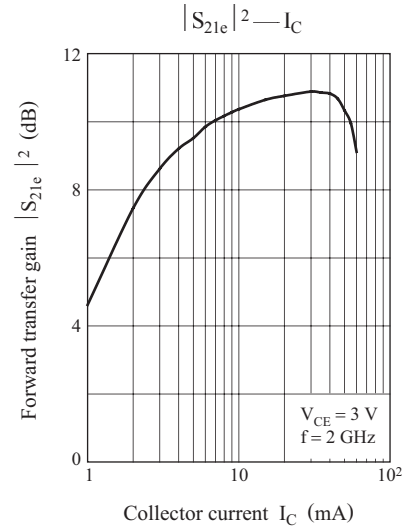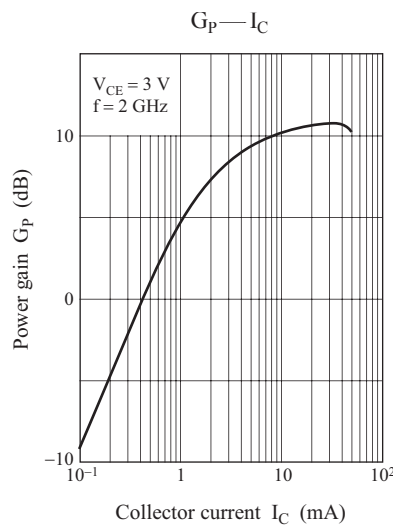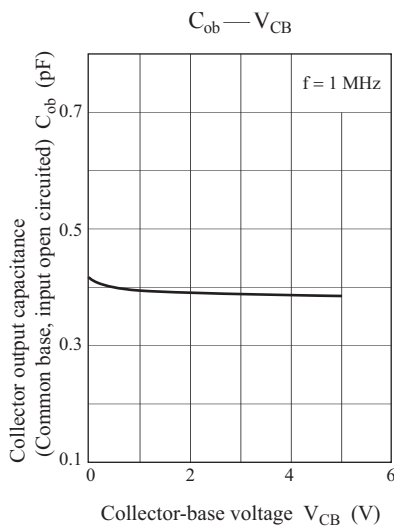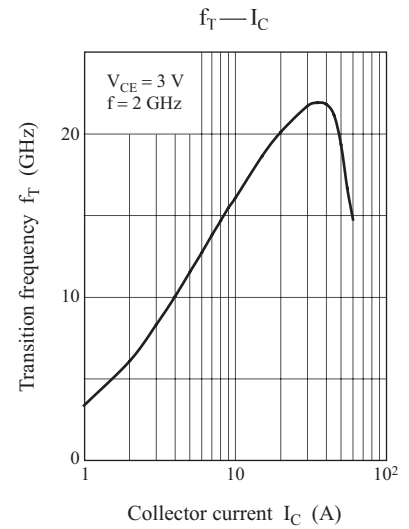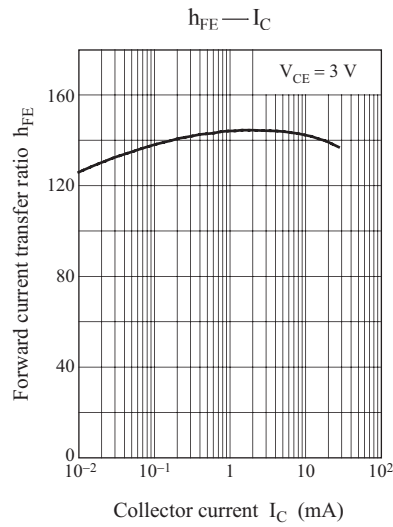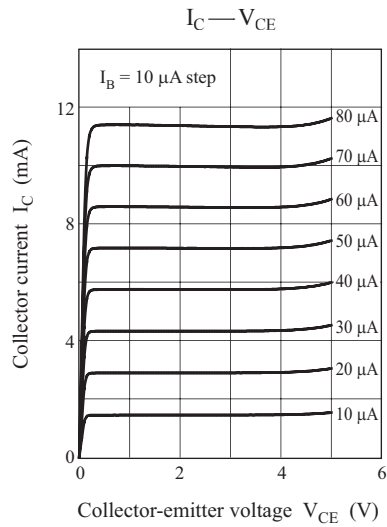

Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products, and no license is granted under any intellectual property right or other right owned by our company or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).
Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
 - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.
 - ☐ Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of Matsushita Electric Industrial Co., Ltd. Industrial Co., Ltd.