


## High Speed LDO Regulators, High PSRR, Low noise, ME6211 Series

### General Description

The ME6211 series are highly accurate, low noise, CMOS LDO Voltage Regulators. Offering low output noise, high ripple rejection ratio, low dropout and very fast turn-on times, the ME6211 series is ideal for today's cutting edge mobile phone. Internally the ME6211 includes a reference voltage source, error amplifiers, driver transistors, current limiters and phase compensators. The ME6211's current limiters' foldback circuit also operates as a short protect for the output current limiter and the output pin. The ME6211 series is also fully compatible with low ESR ceramic capacitors, reducing cost and improving output stability. This high level of output stability is maintained even during frequent load fluctuations, due to the excellent transient response performance and high PSRR achieved across a broad range of frequencies. The CE function allows the output of regulator to be turned off, resulting in greatly reduced power consumption.

### Selection Guide

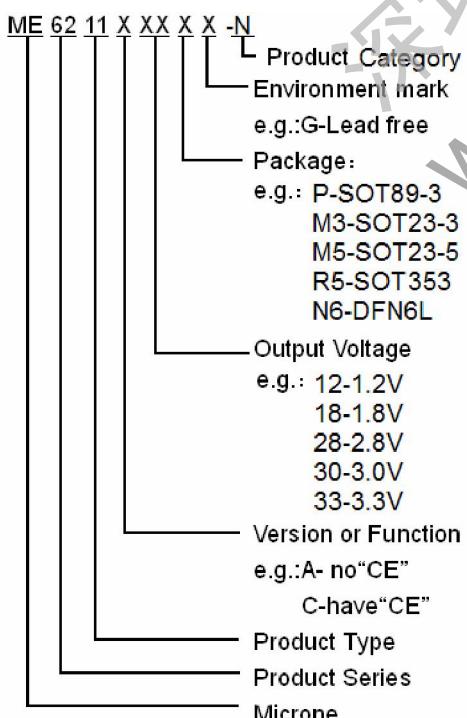


### Features

- | Maximum Output Current: 500mA (  $V_{IN} = 4.3V, V_{OUT} = 3.3V$  )
- | Dropout Voltage: 100mV @  $I_{OUT} = 100mA$
- | Operating Voltage Range: 2V ~ 6.0V
- | Highly Accuracy:  $\pm 2\%$
- | Low Power Consumption: 50uA ( TYP. )
- | Standby Current: 0.1uA ( TYP. )
- | High Ripple Rejection: 70dB@1KHz ( ME6211C33 )
- | Low output noise: 50uVrms
- | Line Regulation: 0.05% ( TYP. )
- | Ultra Small Packages: SOT-89-3 , SOT-23-3 , SOT-23-5, DFN6L, SOT-353


### Typical Application

- | Mobile phones
- | Cordless phones, radio communication equipment
- | Portable games
- | Cameras, Video cameras
- | Reference voltage sources
- | Battery powered equipment

### Typical Application Circuit

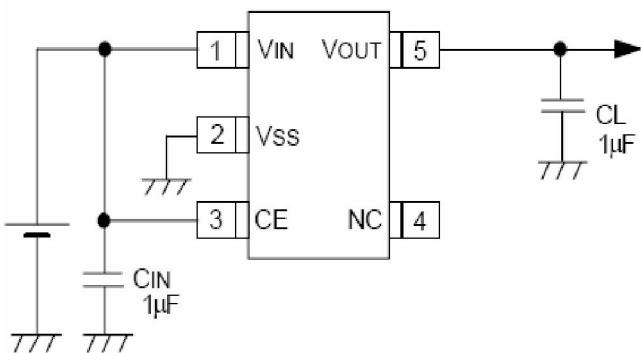

### Pin Configuration

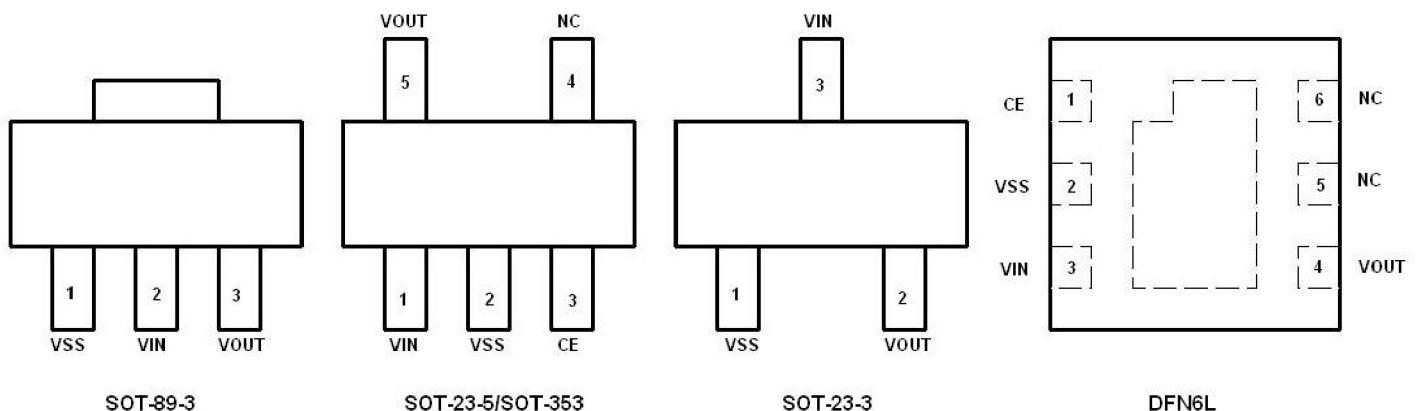

### Pin Assignment

ME6211AXX


Pin Number		Pin Name	Functions
SOT-23-3	SOT-89-3		
1	1	V <sub>SS</sub>	Ground
2	3	V <sub>OUT</sub>	Output
3	2	V <sub>IN</sub>	Power Input

ME6211CXX

Pin Number		Pin Name	Functions
SOT-23-5/SOT-353	DFN6L		
1	3	V <sub>IN</sub>	Power Input
2	2	V <sub>SS</sub>	Ground
3	1	CE	ON / OFF Control
4	5,6	NC	No Connect
5	4	V <sub>OUT</sub>	Output

**Absolute Maximum Ratings**

Parameter	Symbol	Ratings	Units
Input Voltage	V <sub>IN</sub>	6.5	V
Output Current	I <sub>OUT</sub>	600	mA
Output Voltage	V <sub>OUT</sub>	V <sub>SS</sub> -0.3 ~ V <sub>IN</sub> +0.3	V
CE Pin Voltage	V <sub>CE</sub>	V <sub>SS</sub> -0.3 ~ V <sub>IN</sub> +0.3	V
Power Dissipation	SOT-23	250	mW
	SOT-353	250	
	DFN	300	
	SOT-89	500	
Operating Temperature Range	T <sub>OPR</sub>	- 40 ~ + 85	
Storage Temperature Range	T <sub>STG</sub>	- 40 ~ + 125	

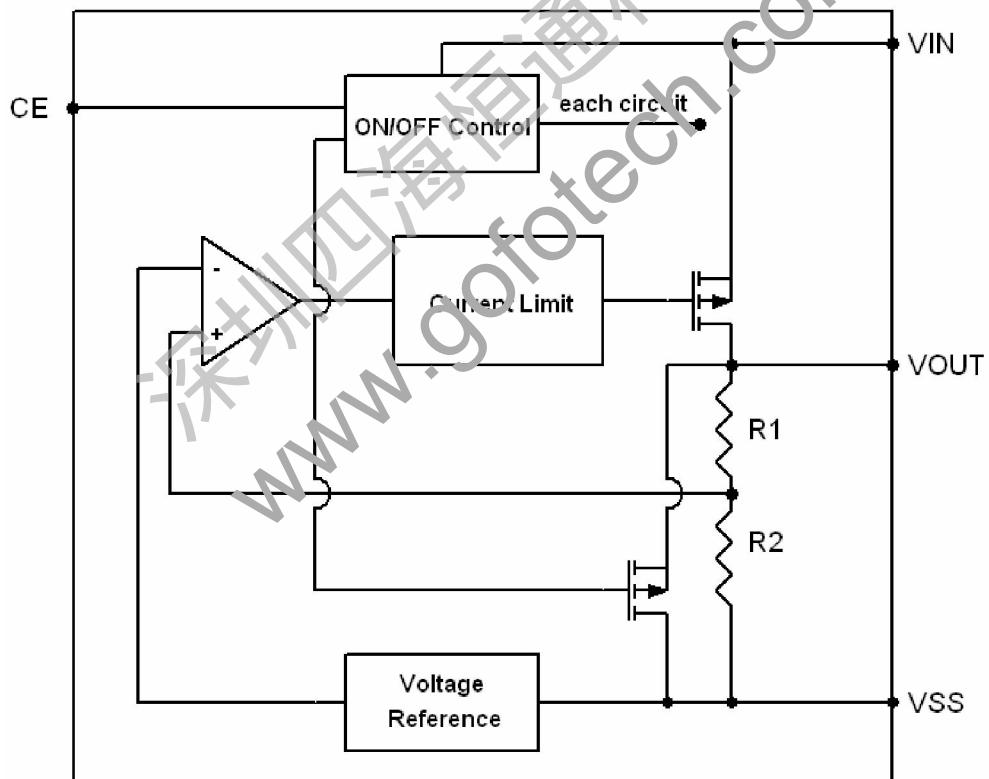**Block Diagram**


**Electrical Characteristics**
**ME6211C12**
 $(V_{IN} = V_{OUT} + 1V, V_{CE} = V_{IN}, C_{IN} = C_L = 1\mu F, Ta = 25^\circ C, \text{unless otherwise noted})$ 

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Output Voltage	$V_{OUT}(E)$ (Note 2)	$I_{OUT} = 30mA, V_{IN} = V_{OUT} + 1V$	X 0.98	$V_{OUT}(T)$ (Note 1)	X 1.02	V
Maximum Output Current	$I_{OUTMAX}$	$V_{IN} = V_{OUT} + 1V$		300		mA
Load Regulation	$V_{OUT}$	$V_{IN} = V_{OUT} + 1V, 1mA I_{OUT} 100mA$		8		mV
Dropout Voltage (Note 1)	$V_{DIF1}$	$I_{OUT} = 100mA$		280		mV
	$V_{DIF2}$	$I_{OUT} = 200mA$		500		mV
Supply Current	$I_{SS}$	$V_{IN} = V_{OUT} + 1V$		40		$\mu A$
Stand-by Current	$I_{CEL}$	$V_{CE} = 0V$		0.1		$\mu A$
Line Regulation	$\frac{V_{OUT}}{V_{IN} \cdot V_{OUT}}$	$I_{OUT} = 40mA$ $V_{OUT} + 1V V_{IN} 6.5V$		0.03		%/V
CE "High" Voltage	$V_{CEH}$	Start up	1.0			V
CE "Low" Voltage	$V_{CEL}$	Shut down			0.7	V
Output noise	$EN$	$I_{OUT} = 40mA, 300Hz \sim 50kHz$		50		$\mu V_{rms}$
Ripple Rejection Rate	$PSRR$	$V_{IN} = [V_{OUT} + 1]V$	$I_{OUT} = 10mA, 1kHz$	70		dB
		$+1V p-pAC$	$I_{OUT} = 100mA, 10kHz$	62		

**ME6211C18**
 $(V_{IN} = V_{OUT} + 1V, V_{CE} = V_{IN}, C_{IN} = C_L = 1\mu F, Ta = 25^\circ C, \text{unless otherwise noted})$ 

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Output Voltage	$V_{OUT}(E)$ (Note 2)	$I_{OUT} = 30mA, V_{IN} = V_{OUT} + 1V$	X 0.98	$V_{OUT}(T)$ (Note 1)	X 1.02	V
Maximum Output Current	$I_{OUTMAX}$	$V_{IN} = V_{OUT} + 1V$		300		mA
Load Regulation	$V_{OUT}$	$V_{IN} = V_{OUT} + 1V, 1mA I_{OUT} 100mA$		9		mV
Dropout Voltage (Note 1)	$V_{DIF1}$	$I_{OUT} = 100mA$		200		mV
	$V_{DIF2}$	$I_{OUT} = 200mA$		400		mV
Supply Current	$I_{SS}$	$V_{IN} = V_{OUT} + 1V$		45		$\mu A$
Stand-by Current	$I_{CEL}$	$V_{CE} = 0V$		0.1		$\mu A$
Line Regulation	$\frac{V_{OUT}}{V_{IN} \cdot V_{OUT}}$	$I_{OUT} = 40mA$ $V_{OUT} + 1V V_{IN} 6.5V$		0.05		%/V
CE "High"	$V_{CEH}$	Start up	1.0			V

Voltage						
CE "Low" Voltage	VCEL	Shut down			0.7	V
Output noise	EN	$I_{OUT} = 40mA, 300Hz \sim 50kHz$		50		uVrms
Ripple Rejection Rate	PSRR	$V_{IN} = [V_{OUT} + 1]V + 1V$	$I_{OUT} = 10mA, 1kHz$	70		dB
		$p-pAC$	$I_{OUT} = 100mA, 10kHz$	62		

**ME6211C28**

( $V_{IN} = V_{OUT} + 1V$ ,  $V_{CE} = V_{IN}$ ,  $C_{IN} = C_L = 1\mu F$ ,  $T_a = 25^\circ C$ , unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Output Voltage	$V_{OUT}(E)$ (Note 2)	$I_{OUT} = 30mA,$ $V_{IN} = V_{OUT} + 1V$	X 0.98	$V_{OUT}(T)$ (Note 1)	X 1.02	V
Maximum Output Current	$I_{OUTMAX}$	$V_{IN} = V_{OUT} + 1V$		450		mA
Load Regulation	$V_{OUT}$	$V_{IN} = V_{OUT} + 1V, 1mA \leq I_{OUT} \leq 100mA$		7		mV
Dropout Voltage (Note 1)	$V_{DIF1}$	$I_{OUT} = 100mA$		110		mV
	$V_{DIF2}$	$I_{OUT} = 200mA$		220		mV
Supply Current	$I_{SS}$	$V_{IN} = V_{OUT} + 1V$		55		$\mu A$
Stand-by Current	$I_{CEL}$	$V_{CE} = 0V$		0		$\mu A$
Line Regulation	$\frac{V_{OUT}}{V_{IN} \cdot V_{OUT}}$	$I_{OUT} = 40mA$ $V_{OUT} + 1V, V_{IN} = 6.5V$		0.04		%/V
CE "High" Voltage	VCEH	Startup	1.0			V
CE "Low" Voltage	VCEL	Shutdown			0.7	V
Output noise	EN	$I_{OUT} = 40mA, 300Hz \sim 50kHz$		50		uVrms
Ripple Rejection Rate	PSRR	$V_{IN} = V_{OUT}$	$I_{OUT} = 10mA, 1kHz$	70		dB
		$+1V + 1V$	$I_{OUT} = 100mA, 10kHz$	62		
		$p-pAC$	$I_{OUT} = 200mA, 10kHz$	62		
Short-circuit Current	$I_{SHORT}$	$V_{IN} = V_{OUT} + 1V, V_{CE} = V_{IN}, V_{OUT} = 0V$		120		mA

**ME6211C30**
 $(V_{IN} = V_{OUT} + 1V, V_{CE} = V_{IN}, C_{IN} = C_L = 1\mu F, Ta = 25^\circ C, \text{unless otherwise noted})$ 

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Output Voltage	$V_{OUT}(E)$ (Note 2)	$I_{OUT} = 30mA, V_{IN} = V_{OUT} + 1V$	X 0.98	$V_{OUT}(T)$ (Note 1)	X 1.02	V
Maximum Output Current	$I_{OUTMAX}$	$V_{IN} = V_{OUT} + 1V$		500		mA
Load Regulation	$V_{OUT}$	$V_{IN} = V_{OUT} + 1V, 1mA I_{OUT} 100mA$		8		mV
Dropout Voltage (Note 1)	$V_{DIF1}$	$I_{OUT} = 100mA$		100		mV
	$V_{DIF2}$	$I_{OUT} = 200mA$		210		mV
Supply Current	$I_{SS}$	$V_{IN} = V_{OUT} + 1V$		60		$\mu A$
Stand-by Current	$I_{CEL}$	$V_{CE} = 0V$		0		$\mu A$
Line Regulation	$\frac{V_{OUT}}{V_{IN} \cdot V_{OUT}}$	$I_{OUT} = 40mA$ $V_{OUT} + 1V V_{IN} 6.5V$		0.05		%/V
CE "High" Voltage	$V_{CEH}$	Start up	1.0			V
CE "Low" Voltage	$V_{CEL}$	Shut down			0.7	V
Output noise	EN	$I_{OUT} = 40mA, 300Hz \sim 50kHz$		50		$\mu V_{rms}$
Ripple Rejection Rate	PSRR	$V_{IN} = [V_{OUT} + 1V + 1V_{p-pAC}]$	$I_{OUT} = 10mA, 1kHz$ $I_{OUT} = 10mA, 10kHz$ $I_{OUT} = 200mA, 10kHz$	70 62 62		dB
Short-circuit Current	$I_{SHORT}$	$V_{IN} = V_{OUT} + 1V, V_{CE} = V_{IN}, V_{OUT} = 0V$		120		mA

**ME6211C33**
 $(V_{IN} = V_{OUT} + 1V, V_{CE} = V_{IN}, C_{IN} = C_L = 1\mu F, Ta = 25^\circ C, \text{unless otherwise noted})$ 

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Output Voltage	$V_{OUT}(E)$ (Note 2)	$I_{OUT} = 30mA, V_{IN} = V_{OUT} + 1V$	X 0.98	$V_{OUT}(T)$ (Note 1)	X 1.02	V
Maximum Output Current	$I_{OUTMAX}$	$V_{IN} = V_{OUT} + 1V$		500		mA
Load Regulation	$V_{OUT}$	$V_{IN} = V_{OUT} + 1V, 1mA I_{OUT} 100mA$		9		mV
Dropout Voltage (Note 1)	$V_{DIF1}$	$I_{OUT} = 100mA$		120		mV
	$V_{DIF2}$	$I_{OUT} = 200mA$		260		mV
Supply Current	$I_{SS}$	$V_{IN} = V_{OUT} + 1V$		55		$\mu A$
Stand-by Current	$I_{CEL}$	$V_{CE} = 0V$		0.1		$\mu A$
Line Regulation	$\frac{V_{OUT}}{V_{IN} \cdot V_{OUT}}$	$I_{OUT} = 40mA$ $V_{OUT} + 1V V_{IN} 6.5V$		0.05		%/V

CE "High" Voltage	VCEH	Start up		1.0			V
CE "Low" Voltage	VCEL	Shut down				0.7	V
Output noise	EN	$I_{OUT} = 40mA, 300Hz \sim 50kHz$		50			uVrms
Ripple Rejection Rate	PSRR	$V_{IN} = [V_{OUT} + 1]V$ $+1Vp-pAC$	$I_{OUT}=10mA, 1kHz$		70		dB
			$I_{OUT}=100mA, 10kHz$		62		
			$I_{OUT}=200mA, 10kHz$		62		
Short-circuit Current	$I_{SHORT}$	$V_{IN} = V_{OUT} + 1V, V_{CE} = V_{IN}, V_{OUT} = 0V$		150			mA

**ME6211A33**

( $V_{IN} = V_{OUT} + 1V$ ,  $C_{IN} = C_L = 1\mu F$ ,  $T_a = 25^{\circ}C$ , unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Output Voltage	$V_{OUT}(E)$ (Note 2)	$I_{OUT}=30mA,$ $V_{IN} = V_{OUT} + 1V$	X 0.98	$V_{OUT}(T)$ (Note 1)	X 1.02	V
Maximum Output Current	$I_{OUTMAX}$	$V_{IN} = V_{OUT} + 1V$		500		mA
Load Regulation	$V_{OUT}$	$V_{IN} = V_{OUT} + 1V, 1mA I_{OUT} < 100\mu A$		9		mV
Dropout Voltage (Note 1)	$V_{DIF1}$	$I_{OUT} = 100mA$		120		mV
	$V_{DIF2}$	$I_{OUT} = 200mA$		260		mV
Supply Current	$I_{SS}$	$V_{IN} = V_{OUT} + 1V$		55		$\mu A$
Line Regulation	$\frac{V_{OUT}}{V_{IN} \cdot V_{OUT}}$	$I_{OUT} = 40mA$ $V_{OUT} + 1V V_{IN} 6.5V$		0.05		%/V
Output noise	EN	$I_{OUT} = 40mA, 300Hz \sim 50kHz$		50		uVrms
Ripple Rejection Rate	PSRR	$V_{IN} = [V_{OUT} + 1]V$ $+1Vp-pAC$	$I_{OUT}=10mA, 1kHz$		70	dB
			$I_{OUT}=100mA, 10kHz$		62	
			$I_{OUT}=200mA, 10kHz$		62	
Short-circuit Current	$I_{SHORT}$	$V_{IN} = V_{OUT} + 1V, V_{OUT} = 0V$		150		mA


Note :

1.  $V_{OUT}(T)$  : Specified Output Voltage
2.  $V_{OUT}(E)$  : Effective Output Voltage ( i.e. The output voltage when " $V_{OUT}(T)+1.0V$ " is provided at the Vin pin while maintaining a certain  $I_{out}$  value.)
3.  $V_{DIF}$  :  $V_{IN1} - V_{OUT}(E)'$   
 $V_{IN1}$  : The input voltage when  $V_{OUT}(E)'$  appears as input voltage is gradually decreased.  
 $V_{OUT}(E)'$  = A voltage equal to 98% of the output voltage whenever an amply stabilized  $I_{out}$  { $V_{OUT}(T)+1.0V$ } is input.


## Type Characteristics

( 1 ) Output CurrentVS.Output Voltage (  $VIN=Vout+1$ ,  $Ta = 25^{\circ}C$  )


ME6211C33M5G

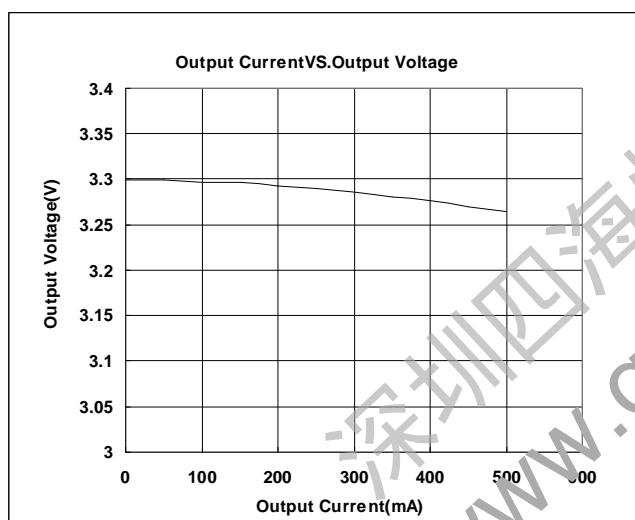


ME6211C30M5G




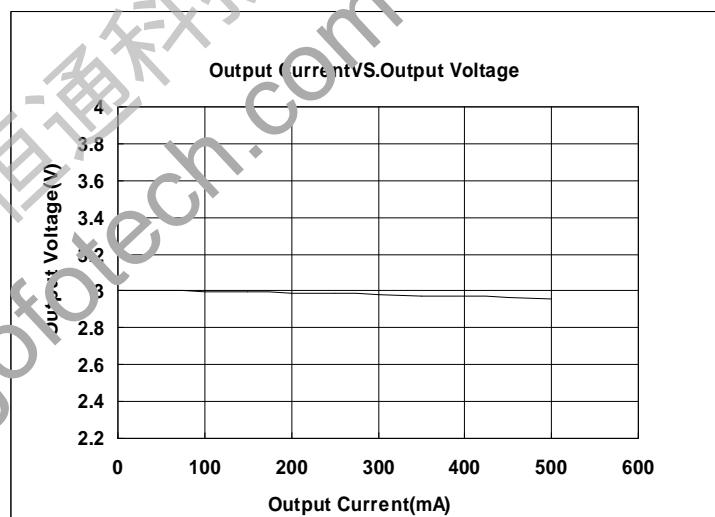


ME6211C28M5G

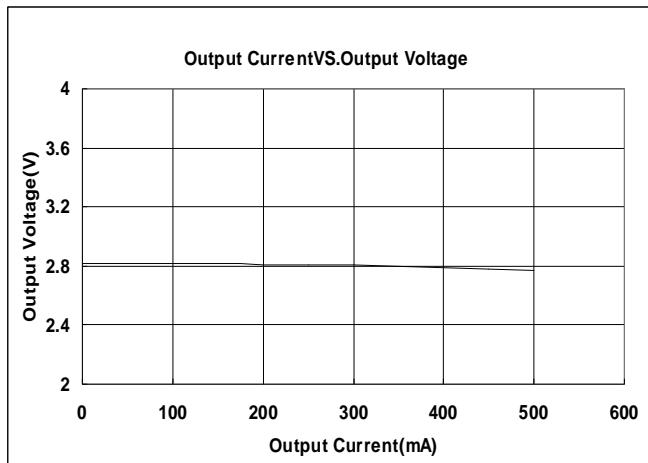


ME6211C18M5G

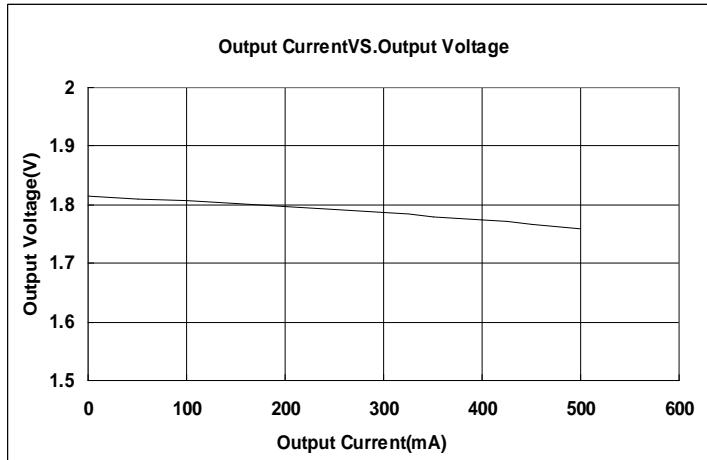

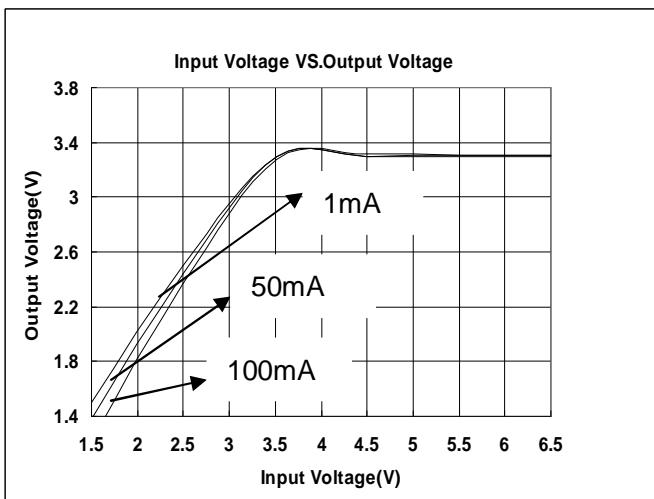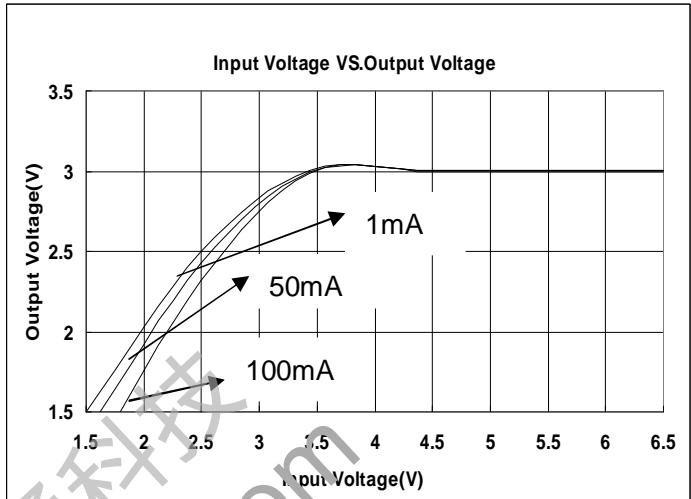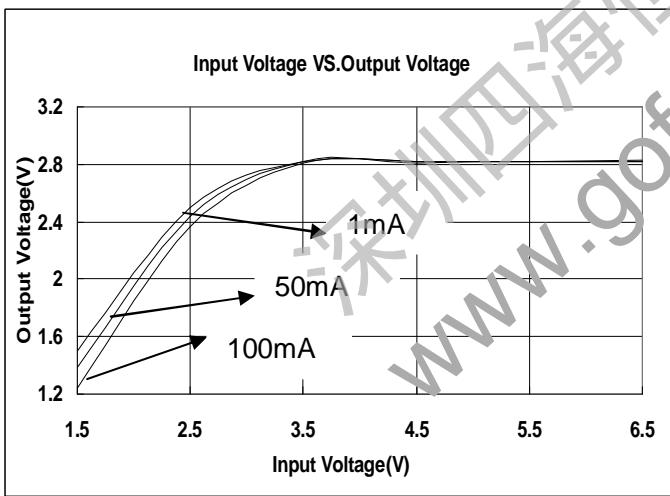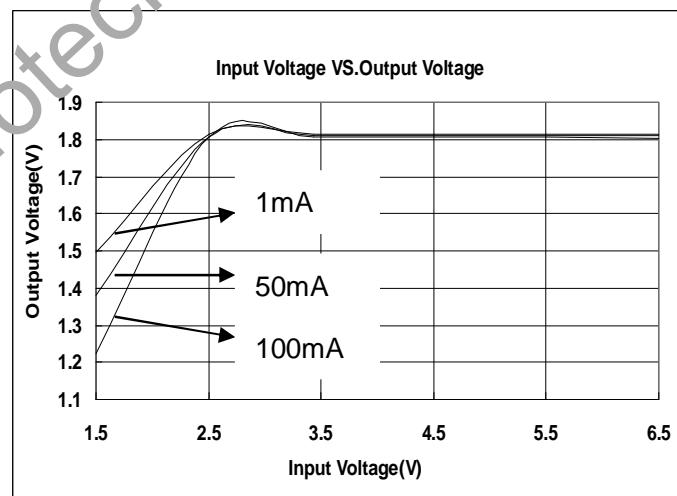
**( 2 ) Input Voltage VS. Output Voltage ( Ta = 25 °C )**
**ME6211C33M5G**

**ME6211C30M5G**

**ME6211C28M5G**

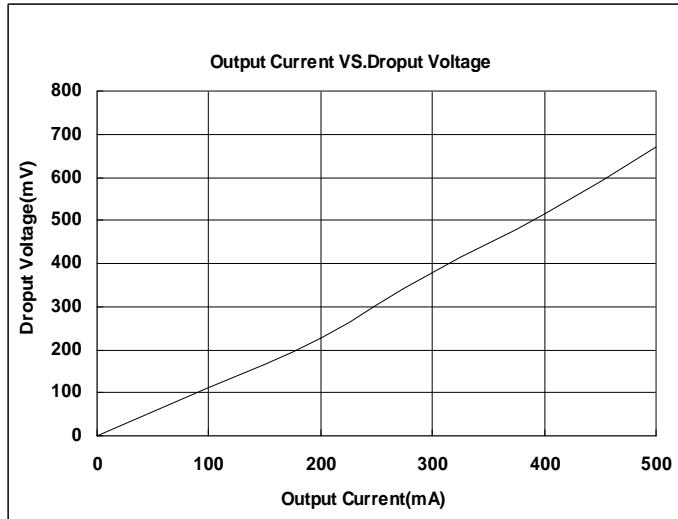**ME6211C18M5G**


(3) Output Current VS.Dropout Voltage (  $V_{IN}=V_{out}+1V$ ,  $T_a = 25^{\circ}\text{C}$  )

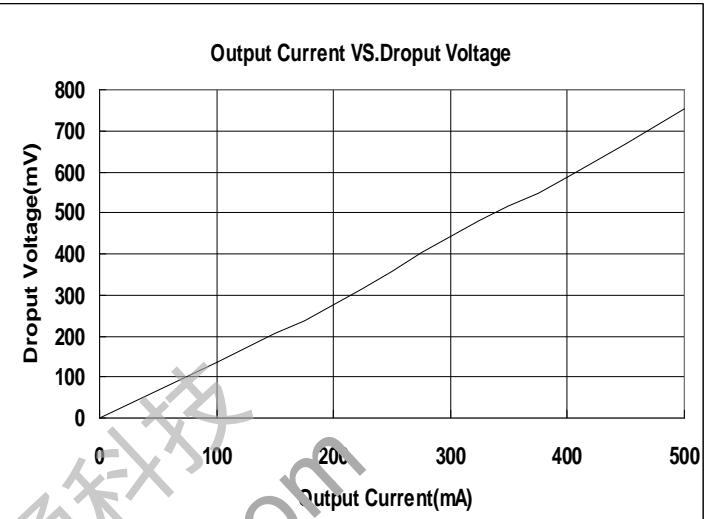
ME6211C33M5G




ME6211C30M5G



ME6211C28M5G

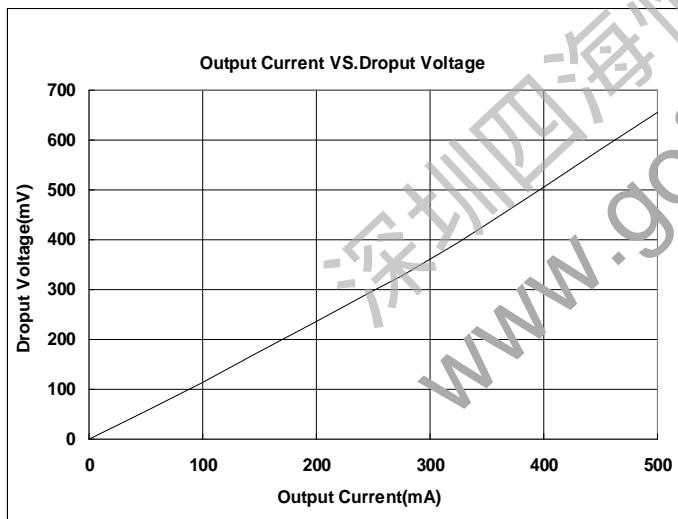


ME6211C13M5G

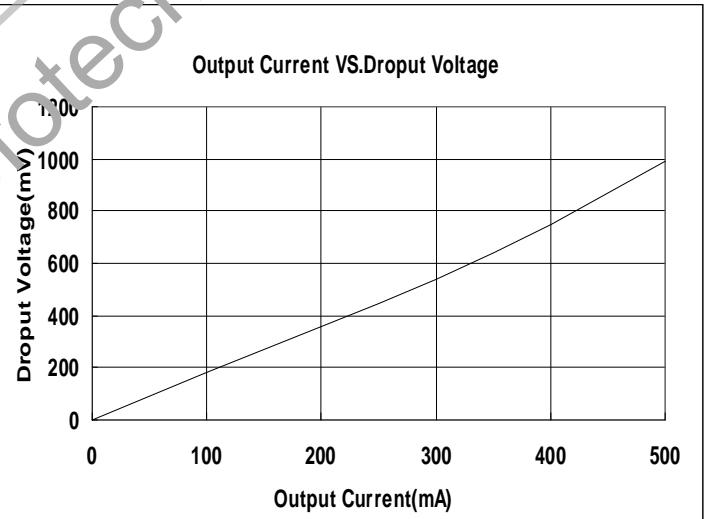


( 4 ) Input Voltage VS. Supply Current (  $T_a = 25^{\circ}\text{C}$  )


ME6211C33M5G

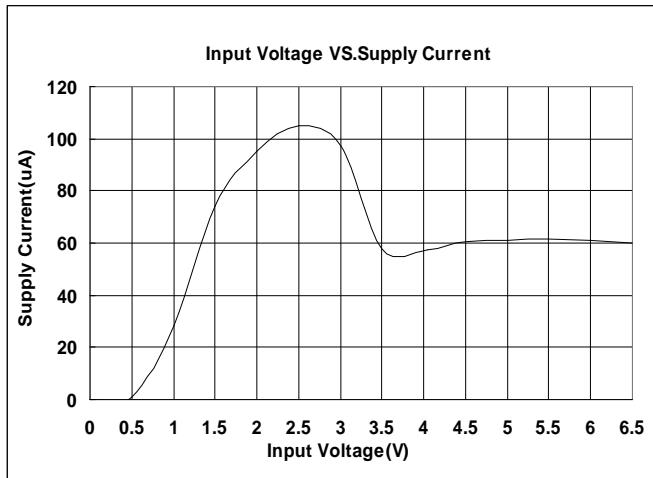


ME6211C30M5G

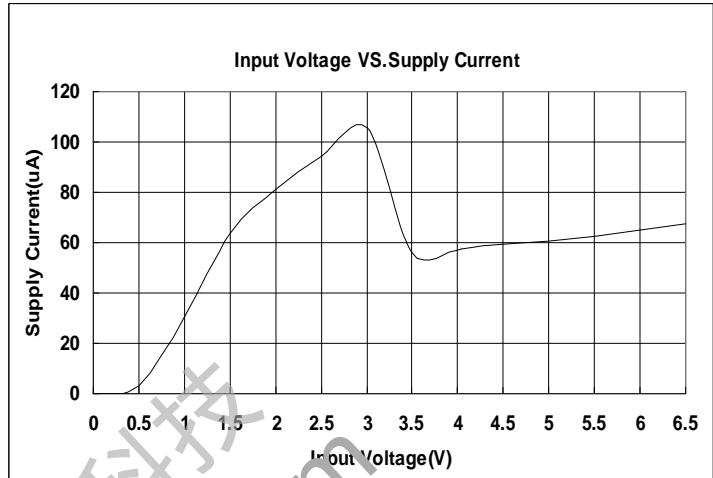

ME6211C28M5G

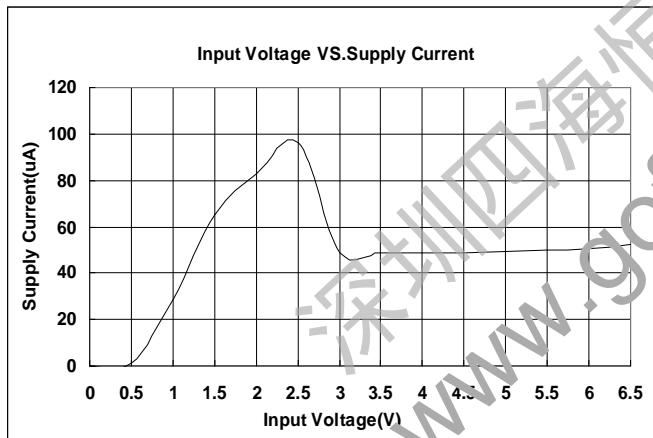


ME6211C18M5G

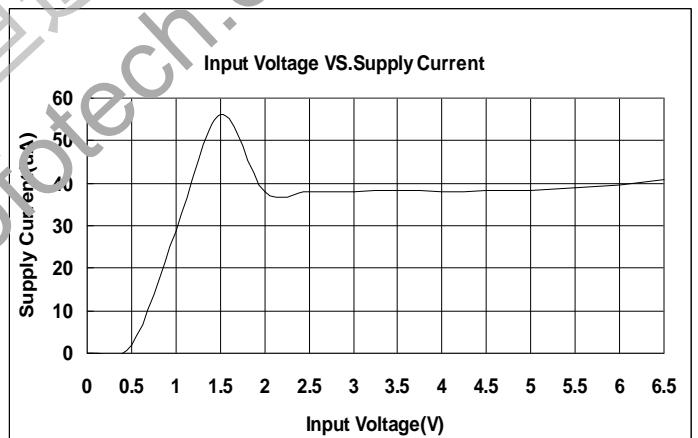


Packaging Information:


SOT23-5

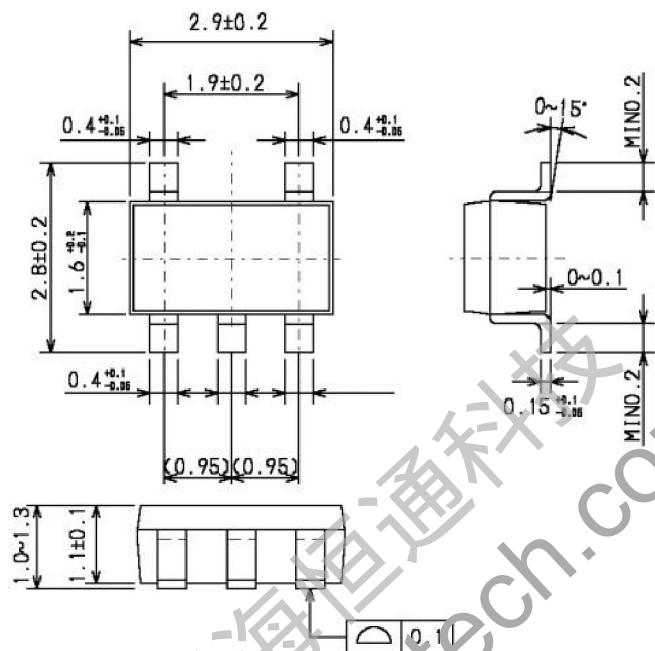


SOT89-3

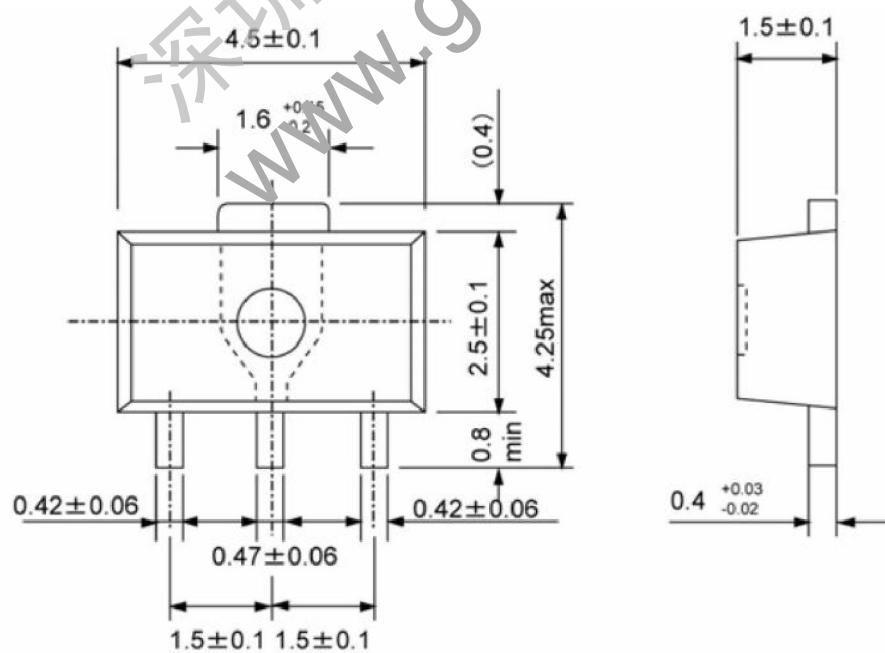


SOT23-3

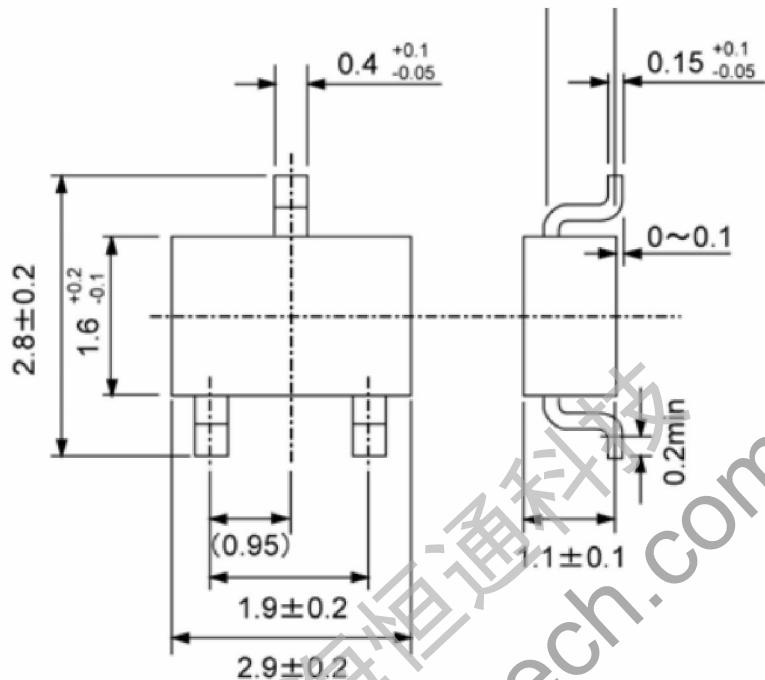

SOT353

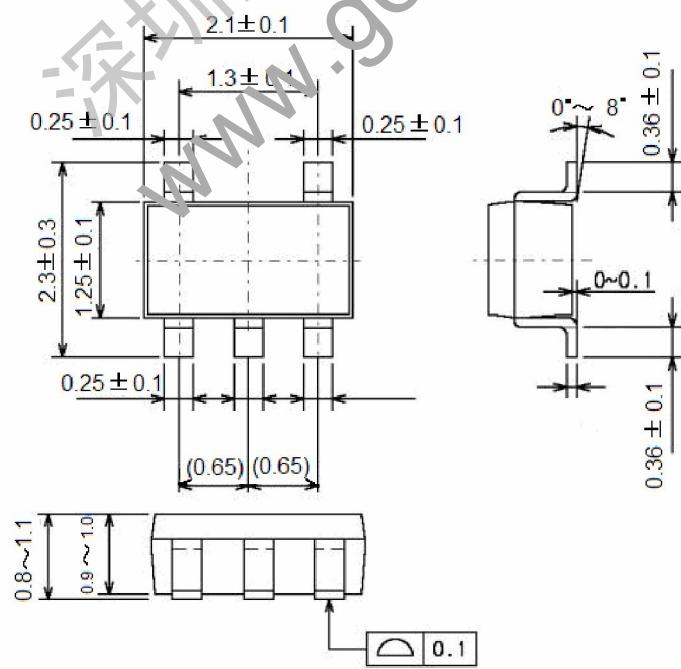

DFN6L

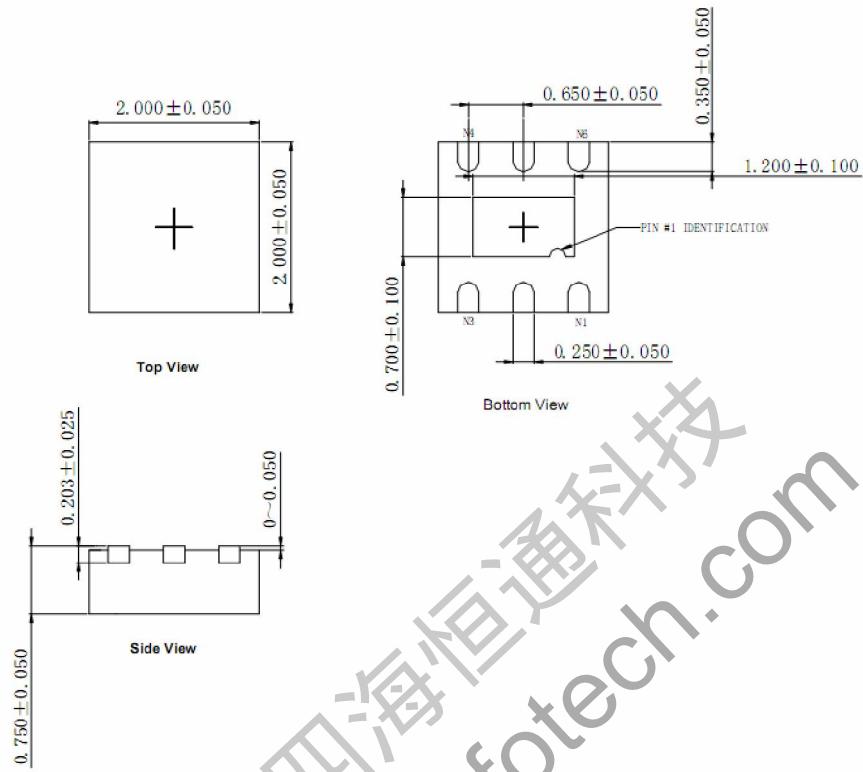

- | The information described herein is subject to change without notice.
- | Nanjing Micro One Electronics Inc is not responsible for any problems caused by circuits or diagrams described herein whose related industrial properties, patents, or other rights belong to third parties. The application circuit examples explain typical applications of the products, and do not guarantee the success of any specific mass-production design.
- | Use of the information described herein for other purposes and/or reproduction or copying without the express permission of Nanjing Micro One Electronics Inc is strictly prohibited.
- | The products described herein cannot be used as part of any device or equipment affecting the human body, such as exercise equipment, medical equipment, security systems, gas equipment, or any apparatus installed in airplanes and other vehicles, without prior written permission of Nanjing Micro One Electronics Inc.
- | Although Nanjing Micro One Electronics Inc exerts the greatest possible effort to ensure high quality and reliability, the failure or malfunction of semiconductor products may occur. The user of these products should therefore give thorough consideration to safety design, including redundancy, fire-prevention measures, and malfunction prevention, to prevent any accidents, fires, or community damage that may ensue.