

[查询TDA9860供应商](#)

[捷多邦，专业PCB打样工厂，24小时加急出货](#)

## INTEGRATED CIRCUITS

# DATA SHEET

**TDA9860**  
Universal HiFi audio processor for  
TV

Preliminary specification  
File under Integrated Circuits, IC02

July 1994

**Universal HiFi audio processor for TV****TDA9860****FEATURES**

- Multi-source selector switches six AF inputs (three stereo sources or six mono sources)
- Each of the input signals can be switched to each of the outputs (crossbar switch)
- Outputs for loudspeaker channel, headphone channel and peri-TV connector (SCART)
- Switchable spatial stereo and pseudo stereo effects
- Audio surround decoder can be added externally
- Two general purpose logic output ports
- I<sup>2</sup>C-bus control of all functions.

**GENERAL DESCRIPTION**

The TDA9860 provides control facilities for the main, the headphone and the SCART channel of a TV set. Due to extended switching possibilities, signals from 3 stereo sources can be handled.

**QUICK REFERENCE DATA**

| SYMBOL           | PARAMETER                                      | MIN. | TYP. | MAX. | UNIT |
|------------------|--|------|------|------|------|
| V <sub>P</sub>   | positive supply voltage (pin 6)                | 7.2  | 8.0  | 8.8  | V    |
| I <sub>P</sub>   | supply current                                 | –    | 25   | –    | mA   |
| V <sub>i</sub>   | input signal levels for 0 dB gain (RMS value)  | 2    | –    | –    | V    |
| V <sub>o</sub>   | output signal levels for 0 dB gain (RMS value) | 2    | –    | –    | V    |
| G <sub>v</sub>   | gain in main channel                           |      |      |      |      |
|                  | volume control (1 dB steps, balance included)  | –63  | –    | +15  | dB   |
|                  | bass control (1.5 dB steps)                    | –12  | –    | +15  | dB   |
|                  | treble control (3 dB steps)                    | –12  | –    | +12  | dB   |
|                  | gain in headphone channel                      |      |      |      |      |
|                  | volume control (2 dB steps)                    | –70  | –    | 0    | dB   |
|                  | gain for muting in all channels                | –80  | –    | –    | dB   |
| THD              | total harmonic distortion                      | –    | 0.1  | –    | %    |
| S/N              | signal-to-noise ratio                          | –    | 85   | –    | dB   |
| T <sub>amb</sub> | operating ambient temperature                  | 0    | –    | +70  | °C   |

**ORDERING INFORMATION**

| EXTENDED<br>TYPE NUMBER | PACKAGE |              |          |                       |
|-------------------------|---------|--------------|----------|-----------------------|
|                         | PINS    | PIN POSITION | MATERIAL | CODE                  |
| TDA9860                 | 32      | SDIL         | plastic  | SOT232 <sup>(1)</sup> |

**Note**

1. SOT232-1; 1996 November 21.

## Universal HiFi audio processor for TV

TDA9860

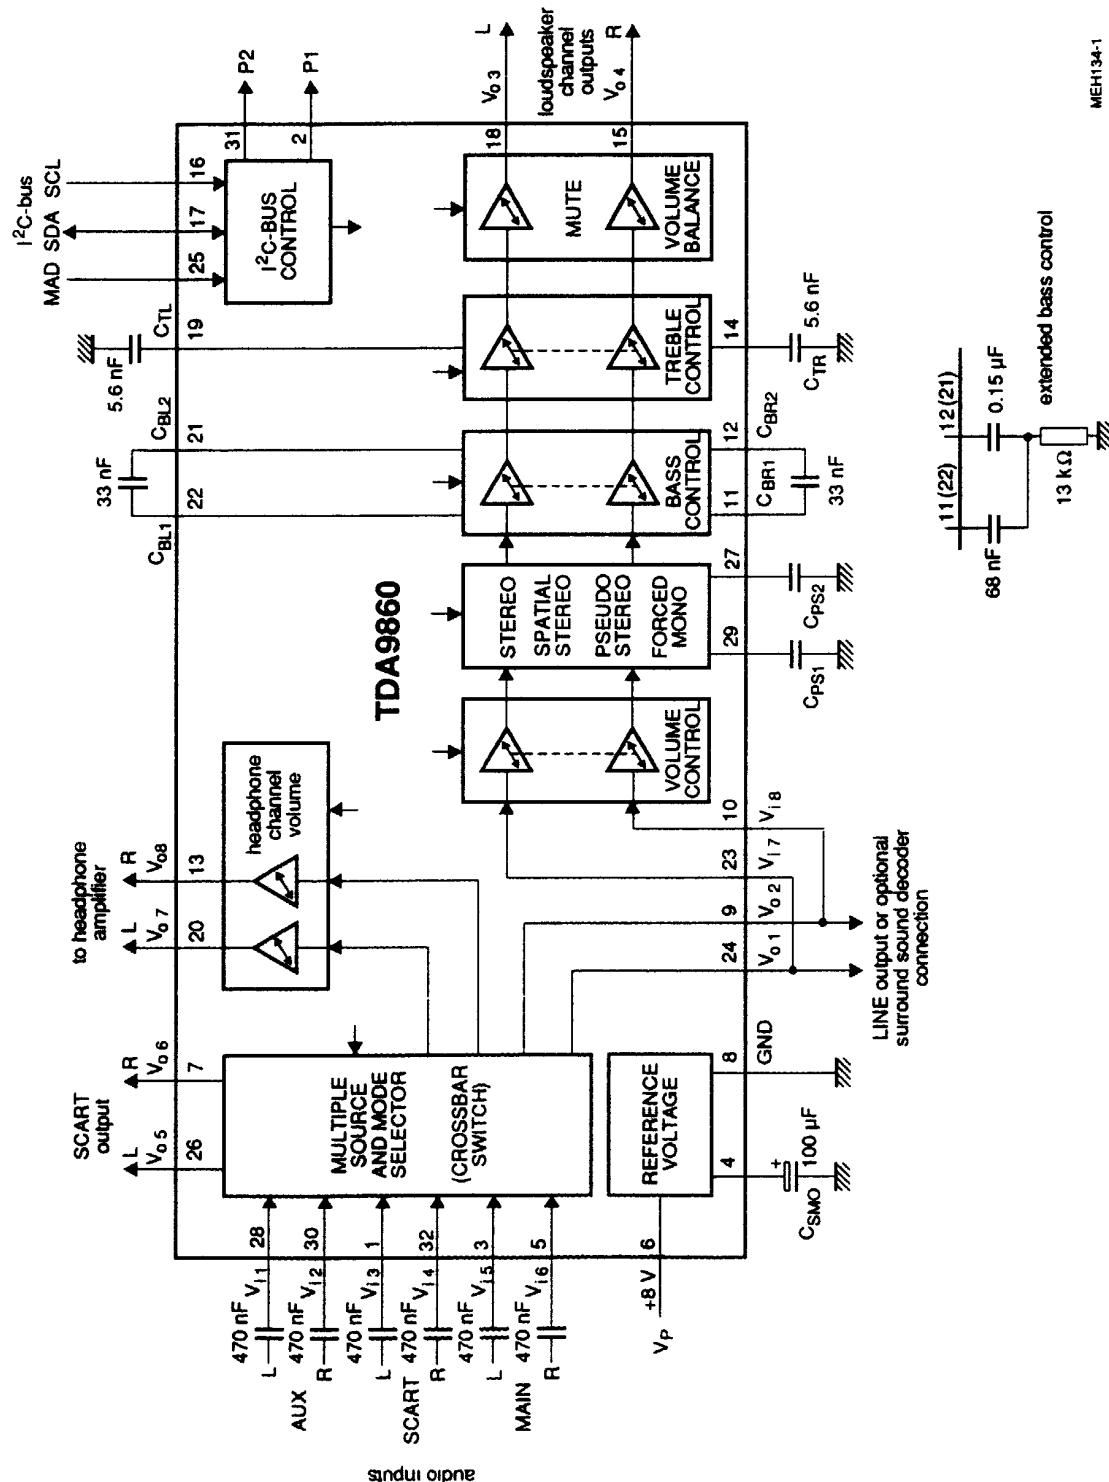


Fig.1 Block diagram and application circuit.

## Universal HiFi audio processor for TV

TDA9860

## PINNING

| SYMBOL    | PIN | DESCRIPTION                               |
|-----------|-----|---|
| $V_{i3}$  | 1   | SCART input signal LEFT                   |
| P1        | 2   | port 1 output                             |
| $V_{i5}$  | 3   | MAIN input signal LEFT                    |
| $C_{SMO}$ | 4   | smoothing capacitor of reference voltage  |
| $V_{i6}$  | 5   | MAIN input signal RIGHT                   |
| $V_P$     | 6   | positive supply voltage                   |
| $V_{o6}$  | 7   | SCART output signal RIGHT                 |
| GND       | 8   | ground                                    |
| $V_{o2}$  | 9   | MAIN output signal RIGHT                  |
| $V_{i8}$  | 10  | input signal RIGHT to loudspeaker channel |
| $C_{BR1}$ | 11  | bass capacitor RIGHT 1                    |
| $C_{BR2}$ | 12  | bass capacitor RIGHT 2                    |
| $V_{o8}$  | 13  | headphone output signal RIGHT             |
| $C_{TR}$  | 14  | treble capacitor RIGHT                    |
| $V_{o4}$  | 15  | loudspeaker channel output signal RIGHT   |
| SCL       | 16  | I <sup>2</sup> C-bus clock line           |
| SDA       | 17  | I <sup>2</sup> C-bus data line            |
| $V_{o3}$  | 18  | loudspeaker channel output signal LEFT    |
| $C_{TL}$  | 19  | treble capacitor LEFT                     |
| $V_{o7}$  | 20  | headphone output signal LEFT              |
| $C_{BL2}$ | 21  | bass capacitor LEFT 2                     |
| $C_{BL1}$ | 22  | bass capacitor LEFT 1                     |
| $V_{i7}$  | 23  | input signal LEFT to loudspeaker channel  |
| $V_{o1}$  | 24  | MAIN output signal LEFT                   |
| MAD       | 25  | module address select input               |
| $V_{o5}$  | 26  | SCART output signal LEFT                  |
| $C_{PS2}$ | 27  | pseudo stereo capacitor 2                 |
| $V_{i1}$  | 28  | AUX input signal LEFT                     |
| $C_{PS1}$ | 29  | pseudo stereo capacitor 1                 |
| $V_{i2}$  | 30  | AUX input signal RIGHT                    |
| P2        | 31  | port 2 output                             |
| $V_{i4}$  | 32  | SCART input signal RIGHT                  |

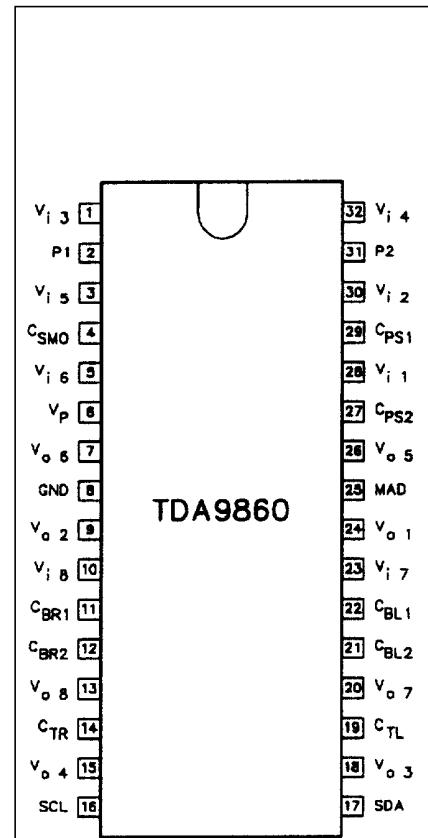


Fig.2 Pin configuration.

## Universal HiFi audio processor for TV

TDA9860

### FUNCTIONAL DESCRIPTION

The TDA9860 consists of the following functions:

- source select switching block
- loudspeaker channel with effect controls
- headphone channel
- two port outputs for general purpose
- I<sup>2</sup>C-bus control

#### Source select switching block

The TDA9860 selects and switches the input signals from three stereo or six mono sources as there are MAIN, AUX and SCART (Fig.1) to one of the outputs SCART, loudspeaker and headphone (crossbar-switching Table 3). Due to the fact, that the main channel (LINE outputs) is looped outside the circuit (from pins 9 and 24 to pins 10 and 23), signals can be used as LINE output or to insert a 'surround sound decoder'.

#### Loudspeaker channel

Volume control is divided into the parts volume 1 and volume 2 / balance. The first part (55 dB) controls left and right channels simultaneously; the second part (23 dB)

controls volume and balance of left and right channels independently. Treble control provides a control range from -12 to +12 dB and bass control from -12 to +15 dB. Extended bass control can be provided by an external T-network (Fig.1) from -15 to +19 dB (2 dB steps).

#### Effect controls

'Linear stereo', 'stereo with spatial effect (30% or 52% anti-phase crosstalk)' and 'forced mono with or without pseudo-stereo effect' are controlled by three bits. A muting of 85 dB is provided.

#### Headphone channel

The headphone channel is only equipped with volume / balance control. A muting of 85 dB is provided.

#### I<sup>2</sup>C-bus control

All settings of control are stored in subaddress registers. Data transmission is simplified by auto-incrementing the subaddresses. The on-chip power on reset sets the mute bit to active, so all 3 stereo outputs are muted. The muting can be switched off by writing a '0' (non-muted) into the mute control bits.

### LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

| SYMBOL           | PARAMETER  | MIN.   | MAX.           | UNIT     |
|------------------|--|--------|----------------|----------|
| V <sub>P</sub>   | supply voltage (pin 6)   | 0      | 10             | V        |
| V <sub>n</sub>   | voltage on all pins, ground excluded                                   | 0      | V <sub>P</sub> | V        |
| I <sub>O</sub>   | output current<br>at pins 15, 18, 13, 20, 7 and 26<br>at pins 2 and 31 | –<br>– | 2.5<br>1.5     | mA<br>mA |
| P <sub>tot</sub> | total power dissipation  | –      | 850            | mW       |
| T <sub>stg</sub> | storage temperature  | -25    | +150           | °C       |
| T <sub>amb</sub> | operating ambient temperature  | 0      | +70            | °C       |
| V <sub>ESD</sub> | electrostatic handling for all pins (note 1)                           | –      | ±300           | V        |
|                  | electrostatic handling for all pins (note 2)                           | –      | ±2000          | V        |

#### Notes to the Limiting Values

1. Equivalent to discharging a 200 pF capacitor through a 0 Ω series resistor.
2. Equivalent to discharging a 100 pF capacitor through a 1.5 kΩ series resistor.

### THERMAL RESISTANCE

| SYMBOL              | PARAMETER                            | THERMAL RESISTANCE |
|---------------------|--------------------------------------|--------------------|
| R <sub>th j-a</sub> | from junction to ambient in free air | 60 K/W             |

## Universal HiFi audio processor for TV

TDA9860

**CHARACTERISTICS**

$V_P = 8 \text{ V}$ ;  $T_{\text{amb}} = +25^\circ\text{C}$ ; treble and bass in linear positions; balance in mid position; spatial function, pseudo-stereo function and forced-mono function in off position and measurements taken in Fig.1 unless otherwise specified.

| SYMBOL           | PARAMETER                  | CONDITIONS | MIN. | TYP.        | MAX. | UNIT |
|------------------|----------------------------|------------|------|-------------|------|------|
| $V_P$            | supply voltage (pin 6)     |            | 7.2  | 8.0         | 8.8  | V    |
| $I_P$            | supply current (pin 6)     |            | —    | 25          | —    | mA   |
| $V_{\text{ref}}$ | internal reference voltage |            | —    | $V_P/2$     | —    | V    |
| $V_4$            | voltage (pin 4)            |            | —    | $V_P - 0.1$ | —    | V    |

**DC voltage on pins**

|       |   |  |   |         |   |   |
|-------|---|--|---|---------|---|---|
| $V_I$ | DC input voltage (pins 1, 3, 5, 10, 23, 28, 30 and 32)            |  | — | $V_P/2$ | — | V |
| $V_O$ | DC output voltage (pins 7, 9, 13, 15, 18, 20, 24 and 26)          |  | — | $V_P/2$ | — | V |
| $V_C$ | DC voltage on capacitors (pins 11, 12, 14, 19, 21, 22, 27 and 29) |  | — | $V_P/2$ | — | V |

**Audio select switch. Line, SCART and headphone outputs** (controlled via I<sup>2</sup>C-bus, Table 3)

|                      |   |                                   |    |    |       |    |
|----------------------|---|-----------------------------------|----|----|-------|----|
| $V_i$                | maximum AF input signal on pins 1, 3, 5, 28, 30, 32 (RMS value)       | THD ≤ 0.5% on output pins         | 2  | —  | —     | V  |
| $R_i$                | input resistance (pins 1, 3, 5, 28, 30, 32)                           |                                   | 20 | 30 | 40    | kΩ |
| $f$                  | frequency response for all AF outputs                                 | -0.5 dB                           | 20 | —  | 20000 | Hz |
| $V_o$                | maximum AF output signal on pins 7, 9, 24, 26 (RMS value)             | THD ≤ 0.5%                        | 2  | —  | —     | V  |
| $R_L$                | allowed external load resistance                                      |                                   |    |    |       |    |
|                      | on output (pins 9 and 24)   |                                   | 10 | —  | —     | kΩ |
|                      | on output (pins 7 and 26)   |                                   | 5  | —  | —     | kΩ |
| $G_v$                | gain for all signal arms  |                                   | —  | 0  | —     | dB |
| $\alpha_{\text{cr}}$ | switch crosstalk on outputs between AF inputs at $f = 10 \text{ kHz}$ | unused inputs connected to ground | —  | 90 | —     | dB |

**LOUDSPEAKER CHANNEL** (controlled via I<sup>2</sup>C-bus, Table 3)

|   |  |   |      |     |      |    |
|---|--|---|------|-----|------|----|
| Volume control 1 (LEFT and RIGHT simultaneously) $f = 1 \text{ kHz}$ , 55 steps |  |   |      |     |      |    |
| $V_i$   | maximum input signal (RMS value; pins 10 and 23) | $G_v = 0$ ; THD ≤ 0.5% on output pins 15 and 18 | 2    | —   | —    | V  |
| $R_i$   | input resistance (pins 10 and 23)                |   | 7.5  | 10  | —    | kΩ |
| $G_v$   | nominal volume control                           |   | -40  | —   | +15  | dB |
|   | minimum volume control                           |   | -38  | —   | +14  | dB |
| $\Delta G_v$  | step width                                       | $G_v = -32$ to $+15 \text{ dB}$                 | 0.5  | 1.0 | 1.5  | dB |
|   |  | $G_v = -40$ to $-33 \text{ dB}$                 | 0.25 | 1.0 | 1.75 | dB |
|   | gain set error                                   | $G_v = -32$ to $+15 \text{ dB}$                 | —    | —   | 1    | dB |
|   |  | $G_v = -40$ to $-33 \text{ dB}$                 | —    | —   | 2    | dB |

## Universal HiFi audio processor for TV

TDA9860

| SYMBOL  | PARAMETER  | CONDITIONS   | MIN. | TYP.  | MAX. | UNIT             |
|---|--|--|------|-------|------|------------------|
| <b>Volume 2 / balance control</b>                   |  | $f = 1 \text{ kHz}$ , 24 steps   |      |       |      |                  |
| $G_v$   | nominal volume control                               |  | -24  | -     | 0    | dB               |
|   | minimum volume control                               |  | -23  | -     | -1   | dB               |
|   | gain in mute position                                |  | -80  | -85   | -    | dB               |
| $\Delta G_v$  | step width   |  | 0.5  | 1.0   | 1.5  | dB               |
|   | gain tracking error                                  |  | -    | -     | 2    | dB               |
| <b>Bass control</b>                                 |  |  |      |       |      |                  |
| $G_v$   | controllable bass                                    | $C_B = 33 \text{ nF}$  |      |       |      |                  |
|   | maximum boost  | $f = 40 \text{ Hz}$  | 14   | 15    | 16   | dB               |
|   | maximum attenuation                                  | $f = 40 \text{ Hz}$  | 11   | 12    | 13   | dB               |
| $\Delta G_v$  | step width   |  | 1    | 1.5   | 2    | dB               |
| $G_v$   | controllable enhanced bass                           | Fig.1  |      |       |      |                  |
|   | maximum boost  | $f = 60 \text{ Hz}$  | 18   | 19    | 20   | dB               |
|   | maximum attenuation                                  | $f = 60 \text{ Hz}$  | 14   | 15    | 16   | dB               |
| $\Delta G_v$  | step width   |  | 1    | 2     | 3    | dB               |
| <b>Treble control</b>                               |  |  |      |       |      |                  |
| $G_v$   | controllable treble                                  |  |      |       |      |                  |
|   | maximum boost  | $f = 15 \text{ kHz}$   | 11   | 12    | 13   | dB               |
|   | maximum attenuation                                  | $f = 15 \text{ kHz}$   | 11   | 12    | 13   | dB               |
| $\Delta G_v$  | step width (resolution)                              |  | 2.5  | 3     | 3.5  | dB               |
| <b>Effect controls</b>                              |  |  |      |       |      |                  |
| $\alpha_{\text{spat}1}$                             | anti-phase crosstalk by spatial effect               |  | -    | 52    | -    | %                |
| $\alpha_{\text{spat}2}$                             |  |  | -    | 30    | -    | %                |
| $\phi$  | phase shift by pseudo-stereo                         |  | -    | Fig.3 | -    |                  |
| <b>Loudspeaker channel outputs (pins 15 and 18)</b> |  |  |      |       |      |                  |
| $V_o$   | maximum output signal<br>(RMS value; pins 15 and 18) | $\text{THD} \leq 0.5\%$ ;<br>$R_L > 10 \text{ k}\Omega$ ; $C_L < 1.5 \text{ nF}$ | 2    | -     | -    | V                |
| $\Delta V_{15, 18}$                                 | maximum DC offset voltage                            | between adjoining step and any step to mute                                      |      |       |      |                  |
|   | for volume control                                   | $G_v = 0 \text{ to } +15 \text{ dB}/\text{mute}$                                 | -    | 2     | 15   | mV               |
|   |  | $G_v = -64 \text{ to } 0 \text{ dB}/\text{mute}$                                 | -    | 0.5   | 10   | mV               |
|   | for bass control                                     | $G_v = 0 \text{ to } +15 \text{ dB}/\text{mute}$                                 | -    | 2     | 15   | mV               |
|   |  | $G_v = -12 \text{ to } 0 \text{ dB}/\text{mute}$                                 | -    | 0.5   | 10   | mV               |
| $R_o$   | output resistance (pins 15 and 18)                   |  | -    | -     | 100  | $\Omega$         |
| $R_L$   | allowed output load resistor                         |  | 10   | -     | -    | $\text{k}\Omega$ |
| $C_L$   | allowed output load capacitor                        |  | -    | -     | 1.5  | nF               |

## Universal HiFi audio processor for TV

TDA9860

| SYMBOL            | PARAMETER  | CONDITIONS   | MIN. | TYP.        | MAX. | UNIT |
|-------------------|--|--|------|-------------|------|------|
| $V_{N(W)}$        | weighted noise voltage at output<br>(quasi-peak level) | CCIR468-3  |      |             |      |      |
|                   | for +15 dB gain  |  | —    | 102         | —    | µV   |
|                   | for 0 dB gain  |  | —    | 32          | —    | µV   |
|                   | for -40 dB gain  |  | —    | 27          | —    | µV   |
|                   | for mute position                                      | $G_V = -80 \text{ dB}$   | —    | 20          | —    | µV   |
| B                 | AF bandwidth   | -1 dB  | —    | 20 to 20000 | —    | Hz   |
| THD               | total harmonic distortion                              | $f = 20 \text{ to } 12500 \text{ Hz}$  |      |             |      |      |
|                   | for $V_i = 0.2 \text{ V}$ (RMS value)                  | $G_V = -30 \text{ to } +15 \text{ dB}$   | —    | 0.1         | 0.3  | %    |
|                   | for $V_i = 1 \text{ V}$ (RMS value)                    | $G_V = -30 \text{ to } 0 \text{ dB}$   | —    | 0.1         | 0.3  | %    |
|                   | for $V_i = 2 \text{ V}$ (RMS value)                    | $G_V = -30 \text{ to } -6 \text{ dB}$  | —    | 0.1         | 0.3  | %    |
| $\alpha_{sp}$     | stereo channel separation                              | $f = 10 \text{ kHz}; G_V = 0 \text{ dB};$<br>opposite input grounded by $1 \text{ k}\Omega$ resistor | —    | 75          | —    | dB   |
| $\alpha_{bus}$    | crosstalk of I <sup>2</sup> C-bus                      | $G_V = 0 \text{ dB}$ ; note 1  | —    | 100         | —    | dB   |
| RR <sub>100</sub> | ripple rejection with 100 Hz ripple on $V_P$           | $G_V = 0 \text{ dB};$<br>$V_R < 200 \text{ mV RMS}$  | —    | 55          | —    | dB   |

HEADPHONE CHANNEL (controlled via I<sup>2</sup>C-bus, Table 3)

| Volume control headphone channel |                         | $f = 1 \text{ kHz}, 36 \text{ steps}$  |     |     |     |    |
|----------------------------------|-------------------------|--|-----|-----|-----|----|
| $G_V$                            | nominal volume control  |  | —70 | —   | 0   | dB |
|                                  | minimum volume control  |  | —67 | —   | —1  | dB |
|                                  | gain in mute position   |  | —80 | —85 | —   | dB |
| $\Delta G_V$                     | step width (resolution) | $G_V = -36 \text{ to } 0 \text{ dB}$   | 1.5 | 2   | 2.5 | dB |
|                                  |                         | $G_V = -70 \text{ to } -36 \text{ dB}$   | 1   | 2   | 3   | dB |
|                                  | gain set error          | $G_V = -36 \text{ to } 0 \text{ dB}$   | —   | —   | 1   | dB |
|                                  |                         | $G_V = -70 \text{ to } -36 \text{ dB}$   | —   | —   | 3   | dB |
| $\Delta V_{13, 20}$              | DC offset voltage       | for adjoining step and<br>step to mute<br>$G_V = -70 \text{ to } 0 \text{ dB}$ | —   | 0.5 | 10  | mV |

## Headphone channel output (pins 13 and 20)

|            |   |   |    |    |     |    |
|------------|---|---|----|----|-----|----|
| $V_o$      | maximum output signal (RMS value)                   | $\text{THD} \leq 0.5\%; R_L > 10 \text{ k}\Omega; C_L < 1.5 \text{ nF}$ | 2  | —  | —   | V  |
| $R_o$      | output resistance                                   |   | —  | —  | 100 | Ω  |
| $R_L$      | allowed output load resistor                        |   | 10 | —  | —   | kΩ |
| $C_L$      | allowed output load capacitor                       |   | —  | —  | 1.5 | nF |
| $V_{N(W)}$ | weighted noise voltage at output (quasi-peak level) | CCIR468-3   |    |    |     |    |
|            | for 0 dB gain                                       |   | —  | 20 | —   | µV |
|            | for -16 dB gain                                     |   | —  | 15 | —   | µV |
|            | for mute position                                   | $G_V = -80 \text{ dB}$  | —  | 12 | —   | µV |

## Universal HiFi audio processor for TV

TDA9860

| SYMBOL  | PARAMETER                                    | CONDITIONS  | MIN. | TYP.        | MAX.  | UNIT |
|---|--|---|------|-------------|-------|------|
| B   | AF bandwidth                                 | -1 dB   | -    | 20 to 20000 | -     | Hz   |
| THD   | total harmonic distortion                    | f = 20 to 12500 Hz  |      |             |       |      |
|   | for $V_i = 1 \text{ V}$ (RMS value)          | $G_V = -40 \text{ to } 0 \text{ dB}$  | -    | 0.08        | 0.25  | %    |
| $\alpha_{sp}$   | stereo channel separation                    | f = 10 kHz; $G_V = 0 \text{ dB}$ ; opposite input grounded by 1 kΩ resistor | -    | 75          | -     | dB   |
| $\alpha_{bus}$  | crosstalk of I <sup>2</sup> C-bus            | $G_V = 0 \text{ dB}$ ; note 1   | -    | 100         | -     | dB   |
| RR <sub>100</sub>   | ripple rejection with 100 Hz ripple on $V_P$ | $G_V = 0 \text{ dB}$ ; $V_R < 200 \text{ mV RMS}$                           | -    | 55          | -     | dB   |
| <b>SCART output</b> (pins 7 and 26)   |  |   |      |             |       |      |
| $V_o$   | maximum output signal (RMS value)            | THD ≤ 0.5%; $R_L > 5 \text{ k}\Omega$                                       | 2    | -           | -     | V    |
| $R_L$   | admissible output load resistor              |   | 5    | -           | -     | kΩ   |
| <b>Power on reset</b>   |  |   |      |             |       |      |
| $V_{PONR}$  | increasing supply voltage                    |   |      |             |       |      |
|   | start of reset                               |   | -    | -           | 2.5   | V    |
|   | end of reset                                 |   | 5.2  | 6.0         | 6.8   | V    |
| $V_{PONR}$  | decreasing supply voltage start of reset     |   | 4.4  | 5.2         | 6.0   | V    |
| <b>I<sup>2</sup>C-bus, SCL and SDA</b> (pins 16 and 17, observe I <sup>2</sup> C-bus specification) |  |   |      |             |       |      |
| $V_{16, 17}$  | input voltage HIGH-level                     |   | 3    | -           | $V_P$ | V    |
|   | input voltage LOW-level                      |   | 0    | -           | 1.5   | V    |
| $I_{16, 17}$  | input current                                |   | -    | -           | ±10   | μA   |
| $V_{ACK}$   | output voltage at acknowledge (pin 17)       | $I_{17} = -3 \text{ mA}$  | -    | -           | 0.4   | V    |
| <b>Module address</b> (pin 25)  |  |   |      |             |       |      |
| $V_{IL}$  | LOW level input voltage                      |   | 0    | -           | 1.5   | V    |
| $V_{IH}$  | HIGH level input voltage                     |   | 3    | -           | $V_P$ | V    |
| <b>Port outputs P1 and P2</b> (open-collector outputs pins 2 and 31)                                |  |   |      |             |       |      |
| $V_{OL}$  | LOW level output voltage                     | $I_{2, 31} = 1 \text{ mA}$ (sink)   | -    | -           | 0.3   | V    |
| $I_{2, 31}$   | port output current                          | sink current  | -    | -           | 1     | mA   |

**Note to the characteristics**

1.  $\alpha_{bus} = 20 \log V_{bus} / V_o$  ( $V_{bus}$  = spurious bus signal voltage on AF output pin).

## Universal HiFi audio processor for TV

TDA9860

**I<sup>2</sup>C-BUS FORMAT**

| S             | SLAVE ADDRESS   | A | SUBADDRESS | A | DATA | P |
|---------------|---|---|------------|---|------|---|
| S             | = start condition   |   |            |   |      |   |
| SLAVE ADDRESS | = 1000 0000 ( $V_{25}$ = LOW) or 1000 0010 ( $V_{25}$ = HIGH) |   |            |   |      |   |
| A             | = acknowledge, generated by the slave or by the master        |   |            |   |      |   |
| SUBADDRESS    | = subaddress byte, see Table 1                                |   |            |   |      |   |
| DATA          | = data byte, see Table 1                                      |   |            |   |      |   |
| P             | = stop condition  |   |            |   |      |   |

This circuit only operates as a slave transmitter.

If more than 1 byte of DATA is transmitted, then auto-increment of the subaddress is performed.

**Byte organisation**

**Table 1** I<sup>2</sup>C-bus transmission.

| FUNCTION                      | SUBADDRESS | HEX | DATA |     |      |      |      |      |      |      |
|-------------------------------|------------|-----|------|-----|------|------|------|------|------|------|
|                               |            |     | D7   | D6  | D5   | D4   | D3   | D2   | D1   | D0   |
| <b>loudspeaker channel</b>    |            |     |      |     |      |      |      |      |      |      |
| volume control both           | 0000 0000  | 00  | 0    | 0   | V05  | V04  | V03  | V02  | V01  | V00  |
| volume/balance left           | 0000 0001  | 01  | 0    | 0   | 0    | VL4  | VL3  | VL2  | VL1  | VL0  |
| volume/balance right          | 0000 0010  | 02  | 0    | 0   | 0    | VR4  | VR3  | VR2  | VR1  | VR0  |
| bass control byte             | 0000 0011  | 03  | 0    | 0   | 0    | BA4  | BA3  | BA2  | BA1  | BA0  |
| treble control byte           | 0000 0100  | 04  | 0    | 0   | 0    | TR3  | TR2  | TR1  | TR0  |      |
| <b>headphone channel</b>      |            |     |      |     |      |      |      |      |      |      |
| volume control left           | 0000 0101  | 05  | 0    | 0   | VHL5 | VHL4 | VHL3 | VHL2 | VHL1 | VHL0 |
| volume control right          | 0000 0110  | 06  | 0    | 0   | VHR5 | VHR4 | VHR3 | VHR2 | VHR1 | VHR0 |
| <b>switching control byte</b> |            |     |      |     |      |      |      |      |      |      |
| headphone output              | 0000 0111  | 07  | 0    | MU0 | 0    | 0    | I03  | I02  | I01  | I00  |
| SCART output                  | 0000 1000  | 08  | 0    | MU1 | P1   | P2   | I13  | I12  | I11  | I10  |
| loudspeaker output            | 0000 1001  | 09  | EF2  | MU2 | EF1  | ST   | I23  | I22  | I21  | I20  |

## Universal HiFi audio processor for TV

TDA9860

**Table 2** Bits of data bytes.

| FUNCTION OF THE BITS IN TABLE 1 | DESCRIPTION   |
|---------------------------------|---|
| V00 to V05                      | volume control common for loudspeaker channel   |
| VL0 to VL4                      | volume control LEFT for loudspeaker channel   |
| VR0 to VR4                      | volume control RIGHT for loudspeaker channel  |
| BA0 to BA4                      | bass control for LEFT and RIGHT loudspeaker channel                                   |
| TR0 to TR3                      | treble control for LEFT and RIGHT loudspeaker channel                                 |
| VHL0 to VHL5                    | volume control LEFT for headphone channel   |
| VHR0 to VHR5                    | volume control RIGHT for headphone channel  |
| I00 to I03                      | input selection for headphone channel   |
| I10 to I13                      | input selection for SCART channel   |
| I20 to I23                      | input selection for loudspeaker channel   |
| MU0, MU1 and MU2                | mute control bits: 0 = non-muted; 1 = muted   |
| EF1, EF2 and ST                 | special mode control bits   |
| P1 and P2                       | control bits for port P1 (pin 2) and P2 (pin 31):<br>output levels: 0 = LOW; 1 = HIGH |

**Table 3** Output and input selection by subaddress bytes 07, 08 and 09.

| OUTPUT AND INPUT CONTROL BYTES, MUTE INCLUDED (EFFECTS TABLE 4) |               |              |                                     |              |                   |                         |     |     |    |     |     |     |     |
|---|---------------|--------------|-------------------------------------|--------------|-------------------|-------------------------|-----|-----|----|-----|-----|-----|-----|
| SELECT OUTPUT PINS  |               | INPUT GROUP  |                                     | INPUT SIGNAL | ADDR              | DATA BYTE TO SUBADDRESS |     |     |    |     |     |     |     |
| <b>Loudspeaker channels</b>                                     |               |              |                                     |              |                   |                         |     |     |    |     |     |     |     |
| output pin 18   | output pin 15 |              |                                     |              | 09                | EF2                     | MU2 | EF1 | ST | I23 | I22 | I21 | I20 |
| <b>SCART channels</b>   |               |              |                                     |              |                   |                         |     |     |    |     |     |     |     |
| output pin 26   | output pin 7  |              |                                     |              | 08                | 0                       | MU1 | P1  | P2 | I13 | I12 | I11 | I10 |
| <b>headphone channels</b>                                       |               |              |                                     |              |                   |                         |     |     |    |     |     |     |     |
| output pin 20   | output pin 13 |              |                                     |              | 07                | 0                       | MU0 | 0   | 0  | I03 | I02 | I01 | I00 |
| SELECT INPUT SIGNAL PINS  |               |              |                                     | HEX          | BITS OF DATA BYTE |                         |     |     |    |     |     |     |     |
| 28  | 28            | AUX LEFT     | V <sub>i1</sub>                     | XB           | X                 | 0                       | X   | X   | 1  | 0   | 1   | 1   |     |
| 30  | 30            | AUX RIGHT    | V <sub>i2</sub>                     | X9           | X                 | 0                       | X   | X   | 1  | 0   | 0   | 1   |     |
| 28  | 30            | AUX STEREO   | V <sub>i1</sub> and V <sub>i2</sub> | X7           | X                 | 0                       | X   | X   | 0  | 1   | 1   | 1   |     |
| 1   | 1             | SCART LEFT   | V <sub>i3</sub>                     | XA           | X                 | 0                       | X   | X   | 1  | 0   | 1   | 0   |     |
| 32  | 32            | SCART RIGHT  | V <sub>i4</sub>                     | X5           | X                 | 0                       | X   | X   | 0  | 1   | 0   | 1   |     |
| 1   | 32            | SCART STEREO | V <sub>i3</sub> and V <sub>i4</sub> | X6           | X                 | 0                       | X   | X   | 0  | 1   | 1   | 0   |     |
| 3   | 3             | MAIN LEFT    | V <sub>i5</sub>                     | XC           | X                 | 0                       | X   | X   | 1  | 1   | 0   | 0   |     |
| 5   | 5             | MAIN RIGHT   | V <sub>i6</sub>                     | XD           | X                 | 0                       | X   | X   | 1  | 1   | 0   | 1   |     |
| 3   | 5             | MAIN STEREO  | V <sub>i5</sub> and V <sub>i6</sub> | X8           | X                 | 0                       | X   | X   | 1  | 0   | 0   | 0   |     |

**Note**

1. X = don't care

## Universal HiFi audio processor for TV

TDA9860

**Table 4** Effect controls.

| SETTING SPECIAL MODES             |  | HEX | DATA BYTE TO SUBADDRESS 09 |     |     |    |     |     |     |     |
|-----------------------------------|--|-----|----------------------------|-----|-----|----|-----|-----|-----|-----|
|                                   |  |     | EF2                        | MU2 | EF1 | ST | I23 | I22 | I21 | I20 |
| stereo with spatial (52%)         |  | BX  | 1                          | 0   | 1   | 1  | X   | X   | X   | X   |
| stereo with spatial (30%)         |  | 3X  | 0                          | 0   | 1   | 1  | X   | X   | X   | X   |
| stereo without spatial            |  | 1X  | 0                          | 0   | 0   | 1  | X   | X   | X   | X   |
| forced mono with pseudo stereo    |  | 2X  | 0                          | 0   | 1   | 0  | X   | X   | X   | X   |
| forced mono without pseudo stereo |  | 0X  | 0                          | 0   | 0   | X  | X   | X   | X   | X   |

**Table 5** Volume 2 / balance control LEFT.

| G <sub>v</sub><br>(dB) | HEX | DATA |     |     |     |     |
|------------------------|-----|------|-----|-----|-----|-----|
|                        |     | VL4  | VL3 | VL2 | VL1 | VL0 |
| 0                      | 1F  | 1    | 1   | 1   | 1   | 1   |
| -1                     | 1E  | 1    | 1   | 1   | 1   | 0   |
| -2                     | 1D  | 1    | 1   | 1   | 0   | 1   |
| -3                     | 1C  | 1    | 1   | 1   | 0   | 0   |
| -4                     | 1B  | 1    | 1   | 0   | 1   | 1   |
| -5                     | 1A  | 1    | 1   | 0   | 1   | 0   |
| -6                     | 19  | 1    | 1   | 0   | 0   | 1   |
| -7                     | 18  | 1    | 1   | 0   | 0   | 0   |
| -8                     | 17  | 1    | 0   | 1   | 1   | 1   |
| -9                     | 16  | 1    | 0   | 1   | 1   | 0   |
| -10                    | 15  | 1    | 0   | 1   | 0   | 1   |
| -11                    | 14  | 1    | 0   | 1   | 0   | 0   |
| -12                    | 13  | 1    | 0   | 0   | 1   | 1   |
| -13                    | 12  | 1    | 0   | 0   | 1   | 0   |
| -14                    | 11  | 1    | 0   | 0   | 0   | 1   |
| -15                    | 10  | 1    | 0   | 0   | 0   | 0   |
| -16                    | 0F  | 0    | 1   | 1   | 1   | 1   |
| -17                    | 0E  | 0    | 1   | 1   | 1   | 0   |
| -18                    | 0D  | 0    | 1   | 1   | 0   | 1   |
| -19                    | 0C  | 0    | 1   | 1   | 0   | 0   |
| -20                    | 0B  | 0    | 1   | 0   | 1   | 1   |
| -21                    | 0A  | 0    | 1   | 0   | 1   | 0   |
| -22                    | 09  | 0    | 1   | 0   | 0   | 1   |
| -23                    | 08  | 0    | 1   | 0   | 0   | 0   |
| mute left              | 07  | 0    | 0   | 1   | 1   | 1   |

**Table 6** Volume 2 / balance control RIGHT.

| G <sub>v</sub><br>(dB) | HEX | DATA |     |     |     |     |
|------------------------|-----|------|-----|-----|-----|-----|
|                        |     | VR4  | VR3 | VR2 | VR1 | VR0 |
| 0                      | 1F  | 1    | 1   | 1   | 1   | 1   |
| -1                     | 1E  | 1    | 1   | 1   | 1   | 0   |
| -2                     | 1D  | 1    | 1   | 1   | 0   | 1   |
| -3                     | 1C  | 1    | 1   | 1   | 0   | 0   |
| -4                     | 1B  | 1    | 1   | 0   | 1   | 1   |
| -5                     | 1A  | 1    | 1   | 0   | 1   | 0   |
| -6                     | 19  | 1    | 1   | 0   | 0   | 1   |
| -7                     | 18  | 1    | 1   | 0   | 0   | 0   |
| -8                     | 17  | 1    | 0   | 1   | 1   | 1   |
| -9                     | 16  | 1    | 0   | 1   | 1   | 0   |
| -10                    | 15  | 1    | 0   | 1   | 0   | 1   |
| -11                    | 14  | 1    | 0   | 1   | 0   | 0   |
| -12                    | 13  | 1    | 0   | 0   | 1   | 1   |
| -13                    | 12  | 1    | 0   | 0   | 1   | 0   |
| -14                    | 11  | 1    | 0   | 0   | 0   | 1   |
| -15                    | 10  | 1    | 0   | 0   | 0   | 0   |
| -16                    | 0F  | 0    | 1   | 1   | 1   | 1   |
| -17                    | 0E  | 0    | 1   | 1   | 1   | 0   |
| -18                    | 0D  | 0    | 1   | 1   | 0   | 1   |
| -19                    | 0C  | 0    | 1   | 1   | 0   | 0   |
| -20                    | 0B  | 0    | 1   | 0   | 1   | 1   |
| -21                    | 0A  | 0    | 1   | 0   | 1   | 0   |
| -22                    | 09  | 0    | 1   | 0   | 0   | 1   |
| -23                    | 08  | 0    | 1   | 0   | 0   | 0   |
| mute right             | 07  | 0    | 0   | 1   | 1   | 1   |

## Universal HiFi audio processor for TV

TDA9860

**Table 7** Volume 1 to control both channels.

| <b>G<sub>v</sub></b><br>(dB) | <b>HEX</b> | <b>DATA</b> |            |            |            |            |            |
|------------------------------|------------|-------------|------------|------------|------------|------------|------------|
|                              |            | <b>V05</b>  | <b>V04</b> | <b>V03</b> | <b>V02</b> | <b>V01</b> | <b>V00</b> |
| +15                          | 3F         | 1           | 1          | 1          | 1          | 1          | 1          |
| +14                          | 3E         | 1           | 1          | 1          | 1          | 1          | 0          |
| +13                          | 3D         | 1           | 1          | 1          | 1          | 0          | 1          |
| +12                          | 3C         | 1           | 1          | 1          | 1          | 0          | 0          |
| +11                          | 3B         | 1           | 1          | 1          | 0          | 1          | 1          |
| +10                          | 3A         | 1           | 1          | 1          | 0          | 1          | 0          |
| +9                           | 39         | 1           | 1          | 1          | 0          | 0          | 1          |
| +8                           | 38         | 1           | 1          | 1          | 0          | 0          | 0          |
| +7                           | 37         | 1           | 1          | 0          | 1          | 1          | 1          |
| +6                           | 36         | 1           | 1          | 0          | 1          | 1          | 0          |
| +5                           | 35         | 1           | 1          | 0          | 1          | 0          | 1          |
| +4                           | 34         | 1           | 1          | 0          | 1          | 0          | 0          |
| +3                           | 33         | 1           | 1          | 0          | 0          | 1          | 1          |
| +2                           | 32         | 1           | 1          | 0          | 0          | 1          | 0          |
| +1                           | 31         | 1           | 1          | 0          | 0          | 0          | 1          |
| 0                            | 30         | 1           | 1          | 0          | 0          | 0          | 0          |
| -1                           | 2F         | 1           | 0          | 1          | 1          | 1          | 1          |
| -2                           | 2E         | 1           | 0          | 1          | 1          | 1          | 0          |
| -3                           | 2D         | 1           | 0          | 1          | 1          | 0          | 1          |
| -4                           | 2C         | 1           | 0          | 1          | 1          | 0          | 0          |
| -5                           | 2B         | 1           | 0          | 1          | 0          | 1          | 1          |
| -6                           | 2A         | 1           | 0          | 1          | 0          | 1          | 0          |
| -7                           | 29         | 1           | 0          | 1          | 0          | 0          | 1          |
| -8                           | 28         | 1           | 0          | 1          | 0          | 0          | 0          |
| -9                           | 27         | 1           | 0          | 0          | 1          | 1          | 1          |
| -10                          | 26         | 1           | 0          | 0          | 1          | 1          | 0          |
| -11                          | 25         | 1           | 0          | 0          | 1          | 0          | 1          |
| -12                          | 24         | 1           | 0          | 0          | 1          | 0          | 0          |
| -13                          | 23         | 1           | 0          | 0          | 0          | 1          | 1          |
| -14                          | 22         | 1           | 0          | 0          | 0          | 1          | 0          |
| -15                          | 21         | 1           | 0          | 0          | 0          | 0          | 1          |
| -16                          | 20         | 1           | 0          | 0          | 0          | 0          | 0          |

| <b>G<sub>v</sub></b><br>(dB) | <b>HEX</b> | <b>DATA</b> |            |            |            |            |            |
|------------------------------|------------|-------------|------------|------------|------------|------------|------------|
|                              |            | <b>V05</b>  | <b>V04</b> | <b>V03</b> | <b>V02</b> | <b>V01</b> | <b>V00</b> |
| -17                          | 1F         | 0           | 1          | 1          | 1          | 1          | 1          |
| -18                          | 1E         | 0           | 1          | 1          | 1          | 1          | 0          |
| -19                          | 1D         | 0           | 1          | 1          | 1          | 0          | 1          |
| -20                          | 1C         | 0           | 1          | 1          | 1          | 0          | 0          |
| -21                          | 1B         | 0           | 1          | 1          | 0          | 1          | 1          |
| -22                          | 1A         | 0           | 1          | 1          | 0          | 1          | 0          |
| -23                          | 19         | 0           | 1          | 1          | 0          | 0          | 1          |
| -24                          | 18         | 0           | 1          | 1          | 0          | 0          | 0          |
| -25                          | 17         | 0           | 1          | 0          | 1          | 1          | 1          |
| -26                          | 16         | 0           | 1          | 0          | 1          | 1          | 0          |
| -27                          | 15         | 0           | 1          | 0          | 1          | 0          | 1          |
| -28                          | 14         | 0           | 1          | 0          | 1          | 0          | 0          |
| -29                          | 13         | 0           | 1          | 0          | 0          | 1          | 1          |
| -30                          | 12         | 0           | 1          | 0          | 0          | 1          | 0          |
| -31                          | 11         | 0           | 1          | 0          | 0          | 0          | 1          |
| -32                          | 10         | 0           | 1          | 0          | 0          | 0          | 0          |
| -33                          | 0F         | 0           | 0          | 1          | 1          | 1          | 1          |
| -34                          | 0E         | 0           | 0          | 1          | 1          | 1          | 0          |
| -35                          | 0D         | 0           | 0          | 1          | 1          | 0          | 1          |
| -36                          | 0C         | 0           | 0          | 1          | 1          | 0          | 0          |
| -37                          | 0B         | 0           | 0          | 1          | 0          | 1          | 1          |
| -38                          | 0A         | 0           | 0          | 1          | 0          | 1          | 0          |
| -39                          | 09         | 0           | 0          | 1          | 0          | 0          | 1          |
| -40                          | 08         | 0           | 0          | 1          | 0          | 0          | 0          |

## Universal HiFi audio processor for TV

TDA9860

**Table 8** Bass control LEFT and RIGHT.

| <b>G<sub>v</sub></b><br>(dB) | <b>HEX</b> | <b>DATA</b> |            |            |            |            |
|------------------------------|------------|-------------|------------|------------|------------|------------|
|                              |            | <b>BA4</b>  | <b>BA3</b> | <b>BA2</b> | <b>BA1</b> | <b>BA0</b> |
| +15                          | 19         | 1           | 1          | 0          | 0          | 1          |
| +13.5                        | 18         | 1           | 1          | 0          | 0          | 0          |
| +12                          | 17         | 1           | 0          | 1          | 1          | 1          |
| +10.5                        | 16         | 1           | 0          | 1          | 1          | 0          |
| +9                           | 15         | 1           | 0          | 1          | 0          | 1          |
| +7.5                         | 14         | 1           | 0          | 1          | 0          | 0          |
| +6                           | 13         | 1           | 0          | 0          | 1          | 1          |
| +4.5                         | 12         | 1           | 0          | 0          | 1          | 0          |
| +3                           | 11         | 1           | 0          | 0          | 0          | 1          |
| +1.5                         | 10         | 1           | 0          | 0          | 0          | 0          |
| 0                            | 0F         | 0           | 1          | 1          | 1          | 1          |
| 0                            | 0E         | 0           | 1          | 1          | 1          | 0          |
| -1.5                         | 0D         | 0           | 1          | 1          | 0          | 1          |
| -3                           | 0C         | 0           | 1          | 1          | 0          | 0          |
| -4.5                         | 0B         | 0           | 1          | 0          | 1          | 1          |
| -6                           | 0A         | 0           | 1          | 0          | 1          | 0          |
| -7.5                         | 09         | 0           | 1          | 0          | 0          | 1          |
| -9                           | 08         | 0           | 1          | 0          | 0          | 0          |
| -10.5                        | 07         | 0           | 0          | 1          | 1          | 1          |
| -12                          | 06         | 0           | 0          | 1          | 1          | 0          |

**Table 9** Treble control LEFT and RIGHT.

| <b>G<sub>v</sub></b><br>(dB) | <b>HEX</b> | <b>DATA</b> |            |            |            |            |
|------------------------------|------------|-------------|------------|------------|------------|------------|
|                              |            | <b>0</b>    | <b>TR3</b> | <b>TR2</b> | <b>TR1</b> | <b>TR0</b> |
| +12                          | 0A         | 0           | 1          | 0          | 1          | 0          |
| +9                           | 09         | 0           | 1          | 0          | 0          | 1          |
| +6                           | 08         | 0           | 1          | 0          | 0          | 0          |
| +3                           | 07         | 0           | 0          | 1          | 1          | 1          |
| 0                            | 06         | 0           | 0          | 1          | 1          | 0          |
| -3                           | 05         | 0           | 0          | 1          | 0          | 1          |
| -6                           | 04         | 0           | 0          | 1          | 0          | 0          |
| -9                           | 03         | 0           | 0          | 0          | 1          | 1          |
| -12                          | 02         | 0           | 0          | 0          | 1          | 0          |

## Universal HiFi audio processor for TV

TDA9860

**Table 10** Volume control of headphone LEFT.

| <b>G<sub>v</sub></b><br>(dB) | <b>HEX</b> | <b>DATA</b> |          |          |          |          |          |
|------------------------------|------------|-------------|----------|----------|----------|----------|----------|
|                              |            | VHL<br>5    | VHL<br>4 | VHL<br>3 | VHL<br>2 | VHL<br>1 | VHL<br>0 |
| 0                            | 3F         | 1           | 1        | 1        | 1        | 1        | 1        |
| -2                           | 3E         | 1           | 1        | 1        | 1        | 1        | 0        |
| -4                           | 3D         | 1           | 1        | 1        | 1        | 0        | 1        |
| -6                           | 3C         | 1           | 1        | 1        | 1        | 0        | 0        |
| -8                           | 3B         | 1           | 1        | 1        | 0        | 1        | 1        |
| -10                          | 3A         | 1           | 1        | 1        | 0        | 1        | 0        |
| -12                          | 39         | 1           | 1        | 1        | 0        | 0        | 1        |
| -14                          | 38         | 1           | 1        | 1        | 0        | 0        | 0        |
| -16                          | 37         | 1           | 1        | 0        | 1        | 1        | 1        |
| -18                          | 36         | 1           | 1        | 0        | 1        | 1        | 0        |
| -20                          | 35         | 1           | 1        | 0        | 1        | 0        | 1        |
| -22                          | 34         | 1           | 1        | 0        | 1        | 0        | 0        |
| -24                          | 33         | 1           | 1        | 0        | 0        | 1        | 1        |
| -26                          | 32         | 1           | 1        | 0        | 0        | 1        | 0        |
| -28                          | 31         | 1           | 1        | 0        | 0        | 0        | 1        |
| -30                          | 30         | 1           | 1        | 0        | 0        | 0        | 0        |
| -32                          | 2F         | 1           | 0        | 1        | 1        | 1        | 1        |
| -34                          | 2E         | 1           | 0        | 1        | 1        | 1        | 0        |
| -36                          | 2D         | 1           | 0        | 1        | 1        | 0        | 1        |
| -38                          | 2C         | 1           | 0        | 1        | 1        | 0        | 0        |
| -40                          | 2B         | 1           | 0        | 1        | 0        | 1        | 1        |
| -42                          | 2A         | 1           | 0        | 1        | 0        | 1        | 0        |
| -44                          | 29         | 1           | 0        | 1        | 0        | 0        | 1        |
| -46                          | 28         | 1           | 0        | 1        | 0        | 0        | 0        |
| -48                          | 27         | 1           | 0        | 0        | 1        | 1        | 1        |
| -50                          | 26         | 1           | 0        | 0        | 1        | 1        | 0        |
| -52                          | 25         | 1           | 0        | 0        | 1        | 0        | 1        |
| -54                          | 24         | 1           | 0        | 0        | 1        | 0        | 0        |
| -56                          | 23         | 1           | 0        | 0        | 0        | 1        | 1        |
| -58                          | 22         | 1           | 0        | 0        | 0        | 1        | 0        |
| -60                          | 21         | 1           | 0        | 0        | 0        | 0        | 1        |
| -62                          | 20         | 1           | 0        | 0        | 0        | 0        | 0        |
| -64                          | 1F         | 0           | 1        | 1        | 1        | 1        | 1        |
| -66                          | 1E         | 0           | 1        | 1        | 1        | 1        | 0        |
| -68                          | 1D         | 0           | 1        | 1        | 1        | 0        | 1        |
| -70                          | 1C         | 0           | 1        | 1        | 1        | 0        | 0        |
| mute left                    | 1B         | 0           | 1        | 1        | 0        | 1        | 1        |

**Table 11** Volume control of headphone RIGHT.

| <b>G<sub>v</sub></b><br>(dB) | <b>HEX</b> | <b>DATA</b> |          |          |          |          |          |
|------------------------------|------------|-------------|----------|----------|----------|----------|----------|
|                              |            | VHR<br>5    | VHR<br>4 | VHR<br>3 | VHR<br>2 | VHR<br>1 | VHR<br>0 |
| 0                            | 3F         | 1           | 1        | 1        | 1        | 1        | 1        |
| -2                           | 3E         | 1           | 1        | 1        | 1        | 1        | 0        |
| -4                           | 3D         | 1           | 1        | 1        | 1        | 1        | 1        |
| -6                           | 3C         | 1           | 1        | 1        | 1        | 0        | 0        |
| -8                           | 3B         | 1           | 1        | 1        | 0        | 1        | 1        |
| -10                          | 3A         | 1           | 1        | 1        | 0        | 1        | 0        |
| -12                          | 39         | 1           | 1        | 1        | 1        | 0        | 1        |
| -14                          | 38         | 1           | 1        | 1        | 0        | 0        | 0        |
| -16                          | 37         | 1           | 1        | 1        | 0        | 1        | 1        |
| -18                          | 36         | 1           | 1        | 1        | 0        | 1        | 0        |
| -20                          | 35         | 1           | 1        | 1        | 0        | 1        | 1        |
| -22                          | 34         | 1           | 1        | 1        | 0        | 1        | 0        |
| -24                          | 33         | 1           | 1        | 1        | 0        | 0        | 1        |
| -26                          | 32         | 1           | 1        | 1        | 0        | 0        | 1        |
| -28                          | 31         | 1           | 1        | 1        | 0        | 0        | 1        |
| -30                          | 30         | 1           | 1        | 1        | 0        | 0        | 0        |
| -32                          | 2F         | 1           | 0        | 1        | 1        | 1        | 1        |
| -34                          | 2E         | 1           | 0        | 1        | 1        | 1        | 0        |
| -36                          | 2D         | 1           | 0        | 1        | 1        | 0        | 1        |
| -38                          | 2C         | 1           | 0        | 1        | 1        | 0        | 0        |
| -40                          | 2B         | 1           | 0        | 1        | 0        | 1        | 1        |
| -42                          | 2A         | 1           | 0        | 1        | 0        | 1        | 0        |
| -44                          | 29         | 1           | 0        | 1        | 0        | 0        | 1        |
| -46                          | 28         | 1           | 0        | 1        | 0        | 0        | 0        |
| -48                          | 27         | 1           | 0        | 0        | 1        | 1        | 1        |
| -50                          | 26         | 1           | 0        | 0        | 1        | 1        | 0        |
| -52                          | 25         | 1           | 0        | 0        | 1        | 0        | 1        |
| -54                          | 24         | 1           | 0        | 0        | 1        | 0        | 0        |
| -56                          | 23         | 1           | 0        | 0        | 0        | 1        | 1        |
| -58                          | 22         | 1           | 0        | 0        | 0        | 0        | 1        |
| -60                          | 21         | 1           | 0        | 0        | 0        | 0        | 1        |
| -62                          | 20         | 1           | 0        | 0        | 0        | 0        | 0        |
| -64                          | 1F         | 0           | 1        | 1        | 1        | 1        | 1        |
| -66                          | 1E         | 0           | 1        | 1        | 1        | 1        | 0        |
| -68                          | 1D         | 0           | 1        | 1        | 1        | 0        | 1        |
| -70                          | 1C         | 0           | 1        | 1        | 1        | 0        | 0        |
| mute right                   | 1B         | 0           | 1        | 1        | 0        | 1        | 1        |

## Universal HiFi audio processor for TV

TDA9860

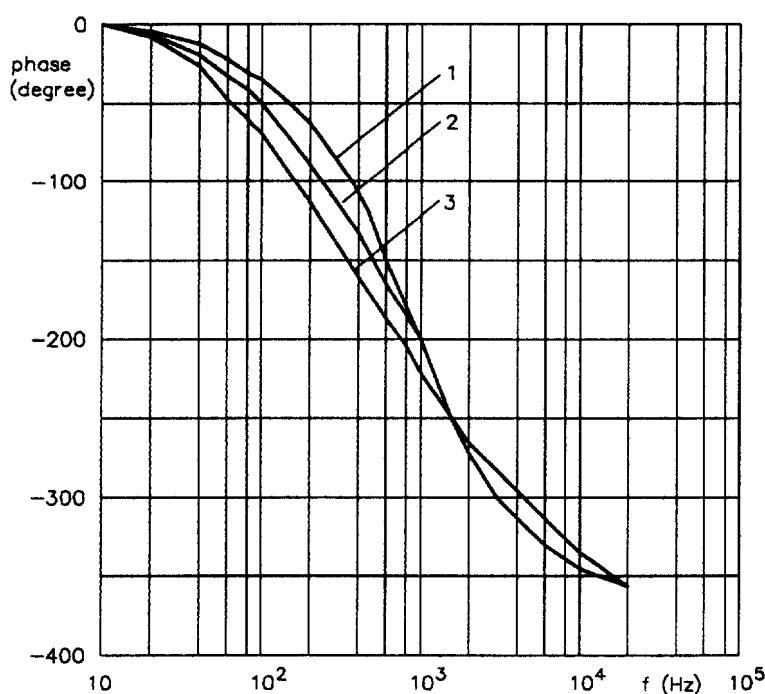


Fig.3 Pseudo (phase) as a function of frequency.

| CURVE | CAPACITANCE AT PIN 29<br>(nF) | CAPACITANCE AT PIN 27<br>(nF) | EFFECT           |
|-------|-------------------------------|-------------------------------|------------------|
| 1     | 15                            | 15                            | normal           |
| 2     | 47                            | 5.6                           | intensified      |
| 3     | 68                            | 5.6                           | more intensified |


## Universal HiFi audio processor for TV

TDA9860

## PACKAGE OUTLINE

SDIP32: plastic shrink dual in-line package; 32 leads (400 mil)

SOT232-1

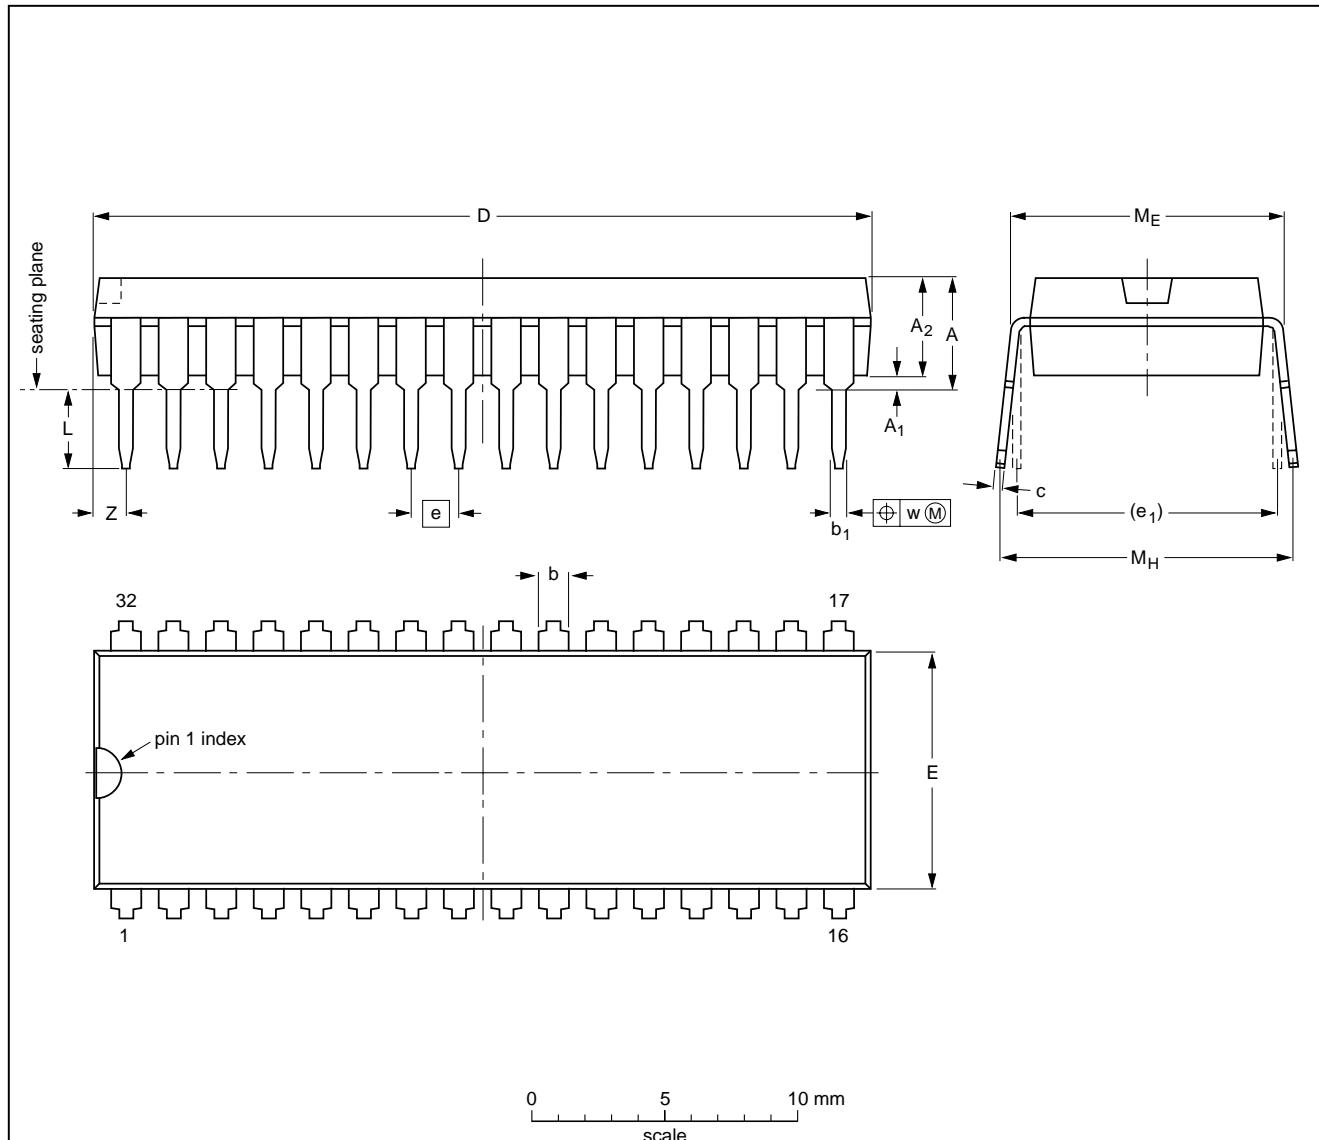

## DIMENSIONS (mm are the original dimensions)

| UNIT | A<br>max. | A <sub>1</sub><br>min. | A <sub>2</sub><br>max. | b          | b <sub>1</sub> | c            | D <sup>(1)</sup> | E <sup>(1)</sup> | e     | e <sub>1</sub> | L          | M <sub>E</sub> | M <sub>H</sub> | w    | Z <sup>(1)</sup><br>max. |
|------|-----------|------------------------|------------------------|------------|----------------|--------------|------------------|------------------|-------|----------------|------------|----------------|----------------|------|--------------------------|
| mm   | 4.7       | 0.51                   | 3.8                    | 1.3<br>0.8 | 0.53<br>0.40   | 0.32<br>0.23 | 29.4<br>28.5     | 9.1<br>8.7       | 1.778 | 10.16          | 3.2<br>2.8 | 10.7<br>10.2   | 12.2<br>10.5   | 0.18 | 1.6                      |

## Note

- Plastic or metal protrusions of 0.25 mm maximum per side are not included.

| OUTLINE<br>VERSION | REFERENCES |       |      |  | EUROPEAN<br>PROJECTION | ISSUE DATE           |
|--------------------|------------|-------|------|--|------------------------|----------------------|
|                    | IEC        | JEDEC | EIAJ |  |                        |                      |
| SOT232-1           |            |       |      |  |                        | 92-11-17<br>95-02-04 |

## Universal HiFi audio processor for TV

TDA9860

### SOLDERING

#### Introduction

There is no soldering method that is ideal for all IC packages. Wave soldering is often preferred when through-hole and surface mounted components are mixed on one printed-circuit board. However, wave soldering is not always suitable for surface mounted ICs, or for printed-circuits with high population densities. In these situations reflow soldering is often used.

This text gives a very brief insight to a complex technology. A more in-depth account of soldering ICs can be found in our "IC Package Databook" (order code 9398 652 90011).

#### Soldering by dipping or by wave

The maximum permissible temperature of the solder is 260 °C; solder at this temperature must not be in contact

with the joint for more than 5 seconds. The total contact time of successive solder waves must not exceed 5 seconds.

The device may be mounted up to the seating plane, but the temperature of the plastic body must not exceed the specified maximum storage temperature ( $T_{stg\ max}$ ). If the printed-circuit board has been pre-heated, forced cooling may be necessary immediately after soldering to keep the temperature within the permissible limit.

#### Repairing soldered joints

Apply a low voltage soldering iron (less than 24 V) to the lead(s) of the package, below the seating plane or not more than 2 mm above it. If the temperature of the soldering iron bit is less than 300 °C it may remain in contact for up to 10 seconds. If the bit temperature is between 300 and 400 °C, contact may be up to 5 seconds.

### DEFINITIONS

| <b>Data sheet status</b>  |   |
|---|---|
| Objective specification   | This data sheet contains target or goal specifications for product development.       |
| Preliminary specification   | This data sheet contains preliminary data; supplementary data may be published later. |
| Product specification   | This data sheet contains final product specifications.                                |
| <b>Limiting values</b>  |   |
| Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability. |   |
| <b>Application information</b>  |   |
| Where application information is given, it is advisory and does not form part of the specification.   |   |

### LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.

### PURCHASE OF PHILIPS I<sup>2</sup>C COMPONENTS



Purchase of Philips I<sup>2</sup>C components conveys a license under the Philips' I<sup>2</sup>C patent to use the components in the I<sup>2</sup>C system provided the system conforms to the I<sup>2</sup>C specification defined by Philips. This specification can be ordered using the code 9398 393 40011.