


.100" [2.54mm] CONTACT CENTERS, .431" INSULATOR HEIGHT

FEATURES


- * Accommodates .062" $\pm$.008" PC board
(Consult factory for .032", .093" and .125" thick boards)
- * PBT or PPS insulator
- * Molded-in key available
- * 3 amp current rating
- * 10 milli ohm maximum at rated current




READOUT

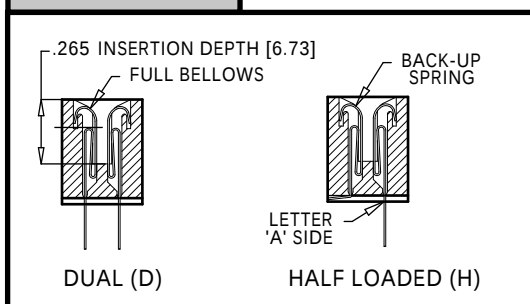


POLARIZING KEYS

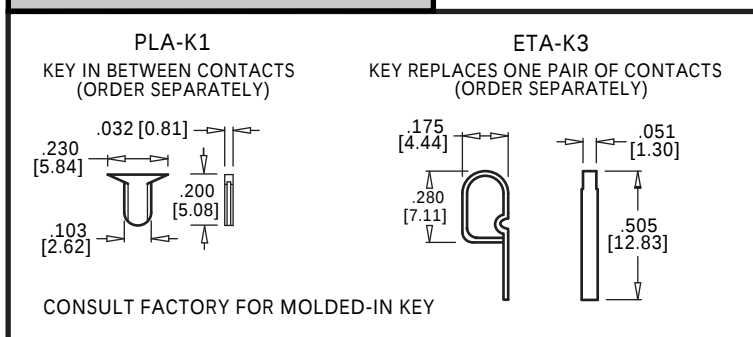

TERMINATION TYPE

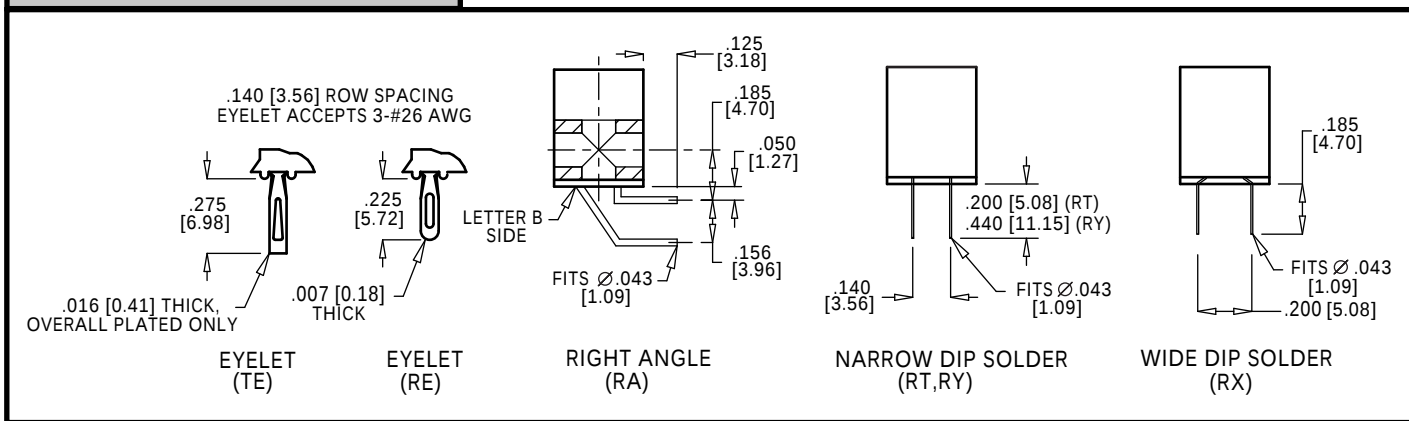

MOUNTING STYLE

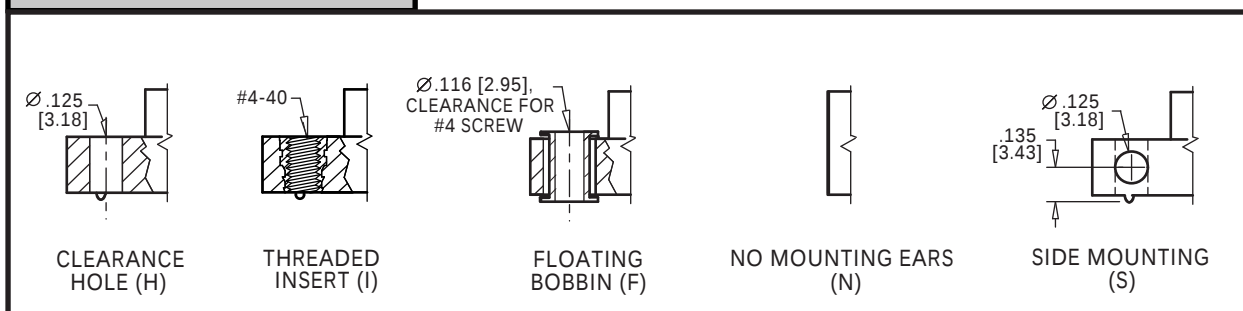


.100" [2.54mm] CONTACT CENTERS, .431" INSULATOR HEIGHT

PART NUMBER CODING

E Z C 43 D R E H -S13			
MATERIALS (Insulator/Contact)			MODIFICATIONS (Consult Factory)
E = PBT/Phosphor Bronze (Standard)			Omit for Standard
H = PBT/Beryllium Copper			-S13 = Card Extender For .062" [1.58 mm] Thick PCB
R = PPS/Phosphor Bronze			-S93 = .093" [2.36 mm] Thick PCB
A = PPS/Beryllium Copper			MOUNTING STYLE (Opposite page)
C = PPS/Beryllium Nickel (Consult Factory)			H = .125" [3.18 mm] Clearance Holes
N = PEEK/Beryllium Copper (Consult Factory)			N = No Mounting
W = PEEK/Beryllium Nickel (Consult Factory)			S = Side Mounting
F = PPS/Pfinodal*** (Consult Factory)			I = Threaded Insert
Consult Factory for Other Materials			F = Floating Bobbin
CONTACT FINISH			TERMINATION TYPE (Opposite page)
Contact Surface	Termination	Underplate	RA = Right Angle
Z = .00010" Gold	.000100" Tin	.000050" Nickel	RE = Eyelet (Standard)
X = .000030" Gold	.000100" Tin	.000050" Nickel	TE = Eyelet (Overall Plated Only)
G = .000010" Gold	.000005" Gold	.000050" Nickel	RT = .140" [3.56 mm] x .200" [5.08 mm] Dip Solder
Y = .000030" Gold	.000005" Gold	.000050" Nickel	RY = .140" [3.56 mm] x .440" [11.18 mm] Dip Solder
Contact Surface	Overall Plating	Underplate	RX = .200" [5.08 mm] x .185" [4.70 mm] Dip Solder
T = .000100" Tin	.000100" Tin	.000050" Nickel	READOUT (Opposite page)
S = .000010" Gold	.000010" Gold	.000050" Nickel	D = Dual
M = .000030" Gold	.000010" Gold	.000050" Nickel	H = Half Loaded
CONTACT CENTERS			NUMBER OF CONTACT POSITIONS
C = .100" [2.54 mm]			05 thru 60

DIMENSIONS

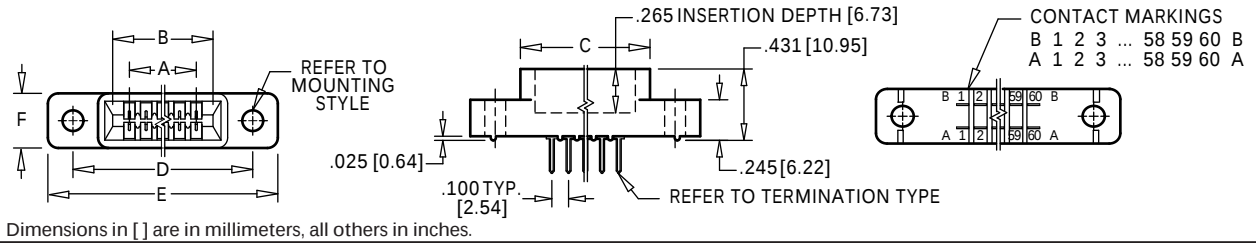

PART NUMBER**	NUMBER OF CONTACTS	INCHES						MILLIMETERS					
		A ±.008	B ±.008	C ±.015	D ±.010	E ±.020	F ±.005	A ±0.20	B ±0.20	C ±0.38	D ±0.25	E ±0.51	F ±0.13
EZC04 --- *	4/8	0.300	0.500	0.675	0.975	1.275	.330	7.62	12.70	17.15	24.77	32.39	8.38
EZC05 ---	5/10	0.400	0.600	0.775	1.075	1.375		10.16	15.24	19.69	27.31	34.93	
EZC06 ---	6/12	0.500	0.700	0.875	1.175	1.475		12.70	17.78	22.23	29.85	37.47	
EZC07 --- *	7/14	0.600	0.800	0.975	1.275	1.575		15.24	20.32	24.77	32.39	40.01	
EZC08 ---	8/16	0.700	0.900	1.075	1.375	1.675		17.78	22.86	27.31	34.93	42.55	
EZC10 ---	10/20	0.900	1.100	1.275	1.575	1.875		22.86	27.94	32.39	40.01	47.63	
EZC12 ---	12/24	1.100	1.300	1.475	1.775	2.075		27.94	33.02	37.47	45.09	52.71	
EZC13 ---	13/26	1.200	1.400	1.575	1.875	2.175		30.48	35.56	40.01	47.63	55.25	
EZC15 ---	15/30	1.400	1.600	1.775	2.075	2.375		35.56	40.64	45.09	52.71	60.33	
EZC17 ---	17/34	1.600	1.800	1.975	2.275	2.575		40.64	45.72	50.17	57.79	65.41	
EZC18 ---	18/36	1.700	1.900	2.075	2.375	2.675		43.18	48.26	52.71	60.33	67.95	
EZC19 ---	19/38	1.800	2.000	2.175	2.475	2.775		45.72	50.80	55.25	62.87	70.49	
EZC20 ---	20/40	1.900	2.100	2.275	2.575	2.875	.400	48.26	53.34	57.79	65.41	73.03	10.16
EZC22 ---	22/44	2.100	2.300	2.475	2.775	3.075		53.34	58.42	62.87	70.49	78.11	
EZC23 --- *	23/46	2.200	2.400	2.575	2.875	3.175		55.88	60.96	65.41	73.03	80.65	
EZC25 ---	25/50	2.400	2.600	2.775	3.075	3.375		60.96	66.04	70.49	78.11	85.73	
EZC26 ---	26/52	2.500	2.700	2.875	3.175	3.475		63.50	68.58	73.03	80.65	88.27	
EZC28 ---	28/56	2.700	2.900	3.075	3.375	3.675		68.58	73.66	78.11	85.73	93.35	
EZC30 ---	30/60	2.900	3.100	3.275	3.575	3.875		73.66	78.74	83.19	90.81	98.43	
EZC31 ---	31/62	3.000	3.200	3.375	3.675	3.975		76.20	81.28	85.73	93.35	100.97	
EZC35 ---	35/70	3.400	3.600	3.775	4.075	4.375		86.36	91.44	95.89	103.51	111.13	
EZC36 ---	36/72	3.500	3.700	3.875	4.175	4.475		88.90	93.98	98.43	106.05	113.67	
EZC40 ---	40/80	3.900	4.100	4.275	4.575	4.875		99.06	104.14	108.59	116.21	123.83	
EZC43 ---	43/86	4.200	4.400	4.575	4.875	5.175		106.68	111.76	116.21	123.83	131.45	
EZC44 ---	44/88	4.300	4.500	4.675	4.975	5.275		109.22	114.30	118.75	126.37	133.99	
EZC49 ---	49/98	4.800	5.000	5.175	5.475	5.775		121.92	127.00	131.45	139.07	146.69	
EZC50 ---	50/100	4.900	5.100	5.275	5.575	5.875		124.46	129.54	133.99	141.61	149.23	
EZC52 --- *	52/104	5.100	5.300	5.475	5.775	6.075		129.54	134.62	139.07	146.69	154.31	
EZC60 ---	60/120	5.900	6.100	6.275	6.575	6.875		149.86	154.94	159.39	167.01	174.63	

* Consult factory for availability.
 ** For complete part number, add readout, termination type and mounting style from Part Number Coding (e.g. EZC43DREH).
 *** Request special soldering instructions before use of Pfinodal material. Low tin solder, non-aggressive flux, and special soldering method required.

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com