

AM radio / FM IF stereo system IC

BA1450S

The BA1450S is a tuner system IC for electronic tuning for AM radios, FM IF, and MPX. It has been developed for Hi-Fi component applications.

The MPX VCO circuit requires no adjustment, which will enable a reduction in the number of production line processes. In particular, the laser lock technique used in the VCO means that no external adjustment is required.

●Applications

Synthesized tuner for Hi-Fi components.

●Features

- 1) Built-in AM monaural radio, FM IF amplifier/detector, and FM stereo demodulator.
- 2) DTS (both SD and IF count) compatible.
- 3) Built-in reference voltage power supply provides good shortwave band frequency stability.
- 4) Good FM stability.
- 5) The FM MPX VCO uses laser locking making adjustment and external components unnecessary.
- 6) Built-in forced monaural operation function for MPX (VCO stops, and LED goes off).
- 7) Low cutoff of audio is possible to improve AM fidelity.
- 8) MPX VCO stops in AM mode.
- 9) Audio muting is possible when an IF request is made.

●Absolute maximum ratings (Ta = 25°C)

Parameter	Symbol	Limits	Unit
Power supply voltage	V _{CC}	9.0	V
Power dissipation	P _d	600*1	mW
Operating temperature	T _{opr}	-25~+75	°C
Storage temperature	T _{stg}	-55~+125	°C


*1 Reduced by 6.0mW for each increase in Ta of 1°C over 25°C.

●Recommended operating conditions (Ta = 25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Power supply voltage	V _{CC}	3.8	5.0	8.0	V



● Block diagram

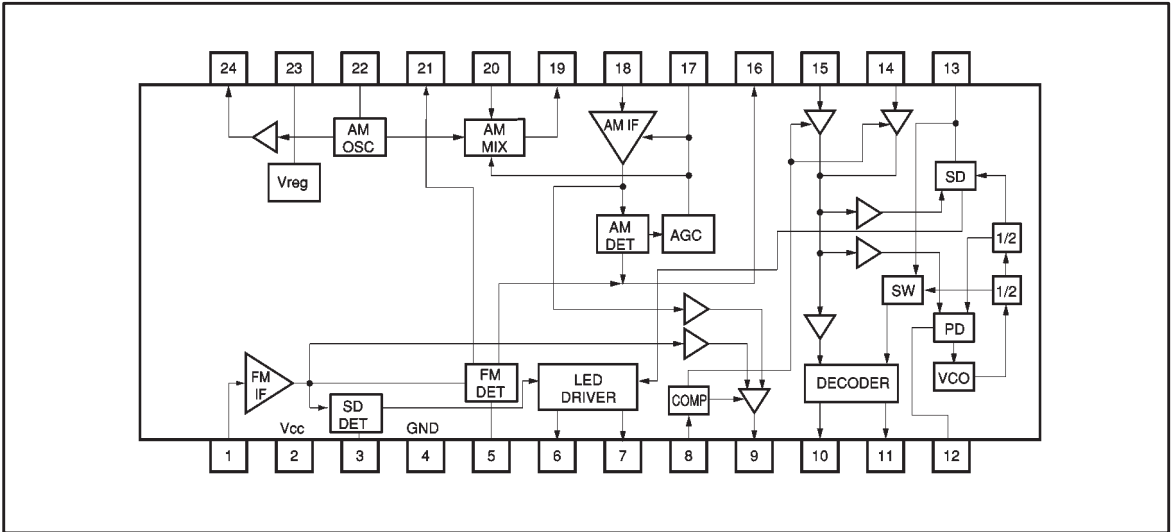

● Input / output circuits

Pin No.	Function	Internal circuit	Quiescent voltage (V)	
			FM	AM
1	FM IF amplifier input Connect to an FM ceramic filter.		2.1	2.1
2	Vcc		5.0	5.0
3	FM tuning ON level adjustment Connect a resistor from this pin to GND to set the required ON level for the tuning indicator.		0.25	0
4	GND		0	0
5	FM discriminator Connect to the discriminator coil.		5.0	5.0
6	Tuning indicator Connect to a tuning indicator display device (eg. LED)		—	—
7	Stereo indicator Connect to a stereo indicator display device (eg. LED)		—	—

Pin No.	Function	Internal circuit	Quiescent pin voltage (V)	
			FM	AM
8	<ul style="list-style-type: none"> • IF request IF signal is output when input is 4.0V or more. • MUTE MUTE on when input is 2.0V or more. 		0	0
9	<p>IF output Output for the IF signal.</p>		4.2	4.2
10	R-channel output		1.5	1.5
11	L-channel output		1.5	1.5
12	<ul style="list-style-type: none"> • PLL filter Connect to a lag/lead filter. • AM/FM band switch AM band when connected to GND. 		2.1	0
13	<ul style="list-style-type: none"> • Forced monaural Forced monaural operation when connected to GND. • Pilot filter Connect to a capacitor. 		2.1	2.1

Pin No.	Function	Internal circuit	Quiescent pin voltage (V)	
			FM	AM
14	MPX input Input the FM detector output .		2.1	2.1
15	MPX input Input the AM detector output after low cut.		2.1	2.1
16	AM/FM detector output Connect to the following stage MPX and FM low pass filter.		2.1	2.1
17	AM AGC Connect to a capacitor.		0	0
18	AM IF input Connect to an AM ceramic filter.		5.0	5.0
19	AM mixer output Connect to primary side of AM IFT.		5.0	5.0
20	AM antenna Connect to AM antenna.		2.1	2.1

Pin No.	Function	Internal circuit	Quiescent pin voltage (V)	
			FM	AM
21	<p>FM detector bandwidth adjustment</p> <p>Connect a resistor from this pin to the reference voltage supply to set the required detector bandwidth.</p>		2.1	2.1
23	<p>Reference voltage supply</p> <p>Connected to a capacitor.</p>		2.1	2.1
22	<p>AM local oscillator</p> <p>Connect to the AM OSC circuit.</p>		2.1	2.1
24	<p>AM local oscillator output</p> <p>AM OSC output.</p>		1.7	1.4

●Electrical characteristics (unless otherwise noted, Ta = 25°C and V_{CC} = 5V)


FM IF MPX signal source: f_{IN} = 10.7MHz, modulation 1kHz, 75kHzdev (100%)

19kHz 7.5kHzdev (10%)

AM: f_{IN} = 1000kHz, modulation 1kHz 30%

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Quiescent current FM	I _{Q (FM)}	13	21	29	mA	No input
Quiescent current AM	I _{Q (AM)}	11	19	27	mA	No input
〈FM IF MPX〉						
Detector output voltage	V _O	340	480	670	mV _{rms}	V _{IN} =100dB μV, mono
-3dB limiting sensitivity	L.S	34	37	40	dB μV	mono
Signal-to-noise ratio	S / N	72	80	—	dB	V _{IN} =100dB μV, mono
Channel balance	C.B	-2	0	+2	dB	V _{IN} =100dB μV, mono
AM suppression ratio	AMR	45	55	—	dB	AM : V _{IN} =60dB μV, mod=30%, 400Hz
Channel separation	SEP	35	45	—	dB	V _{IN} =100dB μV, main
Total harmonic distortion	THD	—	0.5	1.6	%	V _{IN} =100dB μV, main
Station detector sensitivity	SD _s	37	42	47	dB μV	Input for pin 6 current ≥ 1mA
Station detector bandwidth	SD _{sw}	70	100	150	kHz	V _{IN} =100dB μV, mono
IF OUT output voltage	V _{IF}	300	400	530	mV _{P-P}	IF request ON
〈AM〉						
Detector output voltage	V _O	70	90	120	mV _{rms}	V _{IN} =68dB μV
Usable sensitivity	Q.S	22	25	28	dB μV	Input for S/N = 20dB
Signal-to-noise ratio	S / N	42	52	—	dB	V _{IN} =68dB μV
Total harmonic distortion	THD	—	0.6	1.8	%	V _{IN} =68dB μV
Station detector sensitivity	SD _s	21	26	31	dB μV	Input for pin 6 current ≥ 1mA
IF OUT output voltage	V _{IF}	300	400	530	mV _{P-P}	IF request ON
Local buffer output voltage	V _{O Buff}	140	200	280	mV _{rms}	

● Measurement circuit

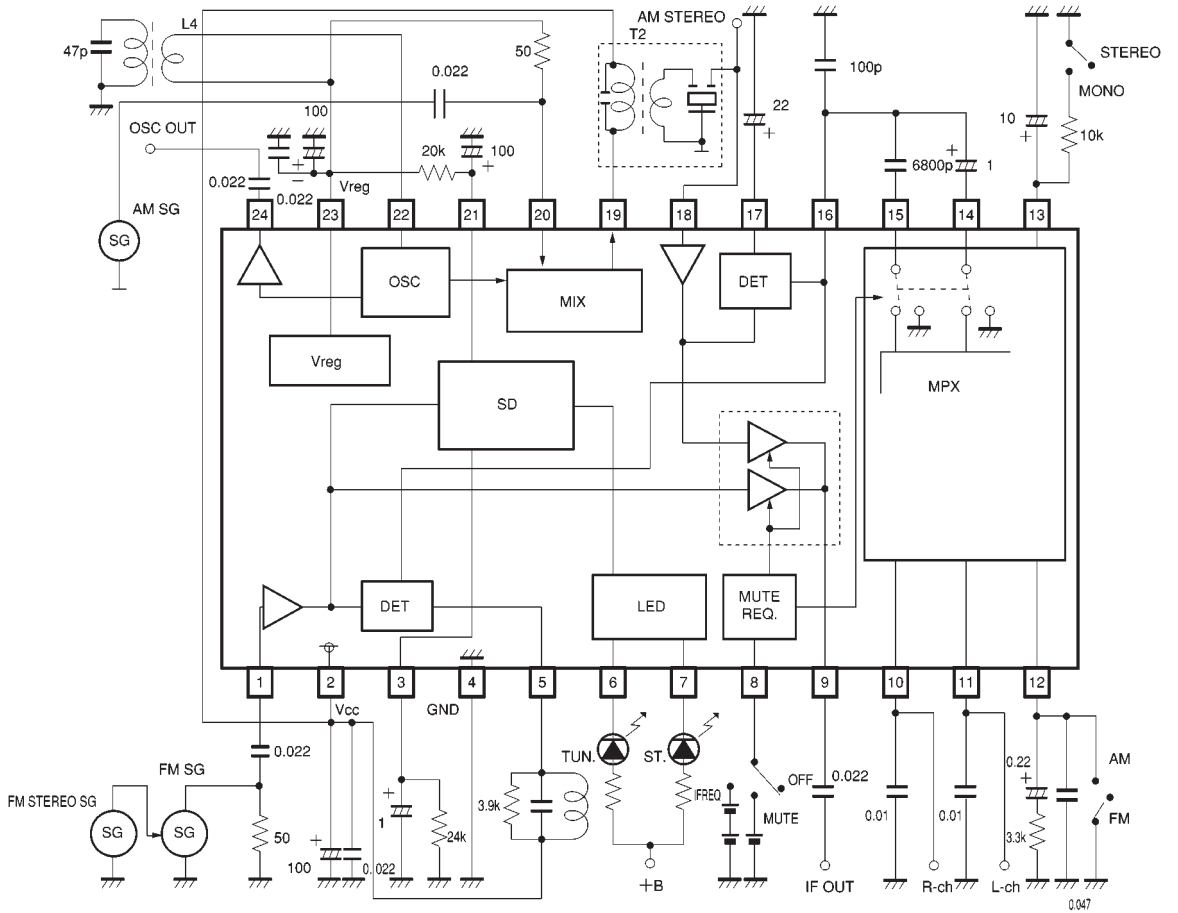

L4 : AM OSC
 T2 : AM IFT
 CD1 : FM DISCRIMINATOR COIL

Sumida
 Toko
 Sumida

2157-JPS-029
 CFMA-258
 0236-JPS-101

Unit : R [Ω]
 C [μF]

Fig. 1

●Application example

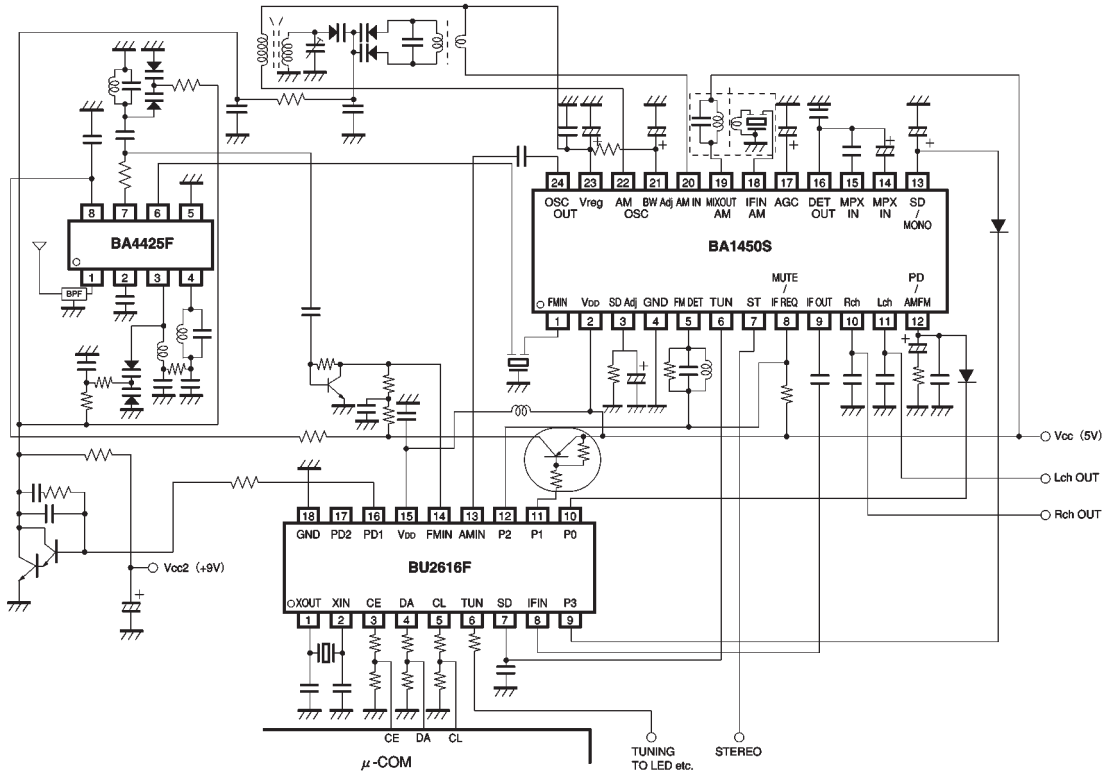


Fig. 2

●Electrical characteristics curves

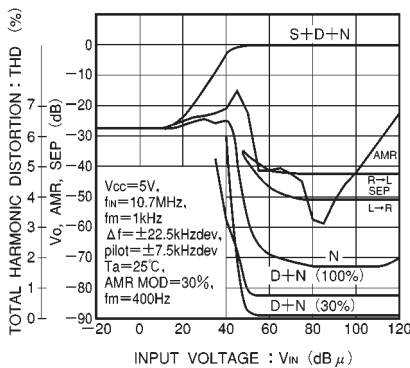


Fig. 3 FM input/output characteristics

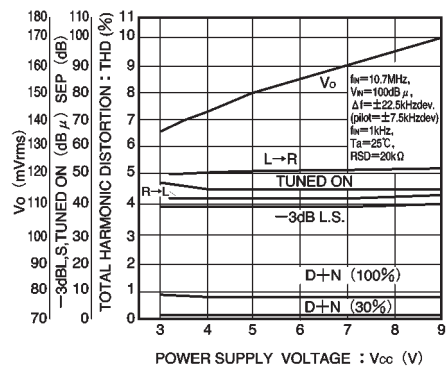


Fig. 4 FM characteristics vs. power supply voltage

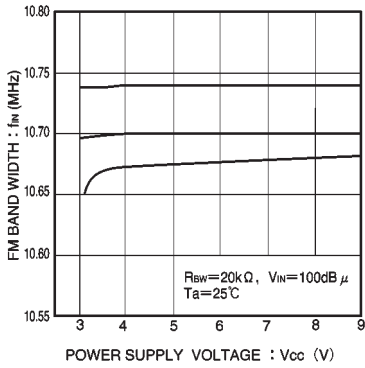


Fig. 5 FM bandwidth vs. power supply voltage

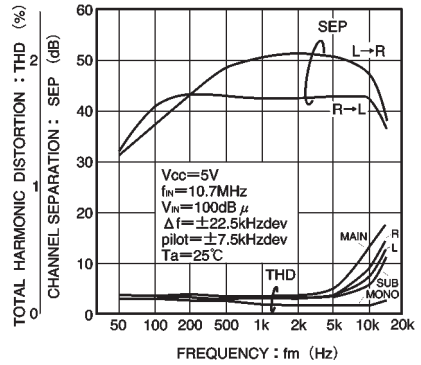


Fig. 6 Channel separation and THD vs. frequency

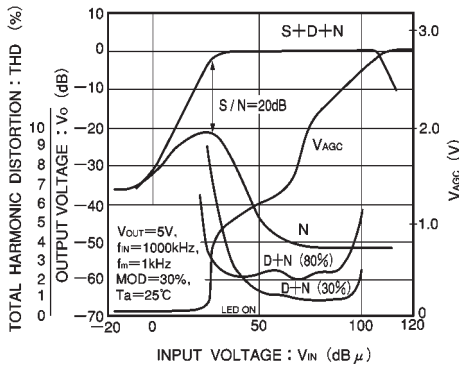


Fig. 7 AM input / output characteristics

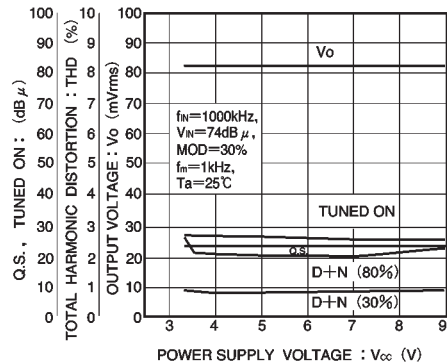


Fig. 8 AM characteristics vs. power supply voltage

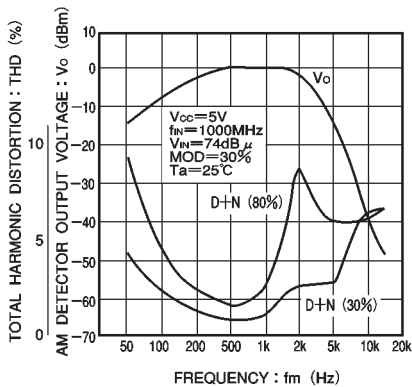


Fig. 9 AM detector output and THD vs. frequency

● External dimensions (Units: mm)

