

## 5 Channel Driver for with Regulator **BA5960FS**

### ●Description

The BA5960FS is a 5-channel Driver (4-channel BTL and 1-channel Loading driver) for an actuator and motor. Since the operational amplifier and variable regulator are built-in, it can be compatible with various applications.

### ●Features

- 1) 5-channel driver (4-channel BTL driver and 1-channel Loading driver)
- 2) Built-in thermal shut down circuit
- 3) The power supply is divided in 4 systems
- 4) Incorporates an operational amplifier.
- 5) Built-in stand-by function
- 6) Built-in variable regulator
- 7) Wide dynamic range  
(5.4V typical at PreVcc=8V, PowVcc=8V, RL=8Ω )
- 8) Mute operated individually Channel-1&2, Channel-3, Channel-4
- 9) Input pins consist of (+) and (-), therefore various input types are available such as differential input.
- 10) Built-in brake function (Loading driver)
- 11) Output voltage can be set up by voltage establishment terminal.

### ●Applications

Car CD, MD

### ●Absolute Maximum Ratings (Ta=25 °C)


Parameter	Symbol	Limits	Unit
Supply voltage	PreVcc, PowVcc	18	V
Powerd dissipation	Pd	1.92 <sup>1</sup>	W
Output current	IOMAX	1 <sup>2</sup>	A
Operating temperature range	Topr	-35 ~ +85	°C
Storage temperature range	Tstg	-55 ~ +150	°C

1 Derating : 15.36mW/°C for operation above Ta=25 °C.

2 The output current must not exceed the maximum ASO

### ●Recommended Operating Conditions (Ta=25 °C)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Supply voltage	PreVcc	4.5	—	13.5	V
	PowVcc	4.5	—	PreVcc	V

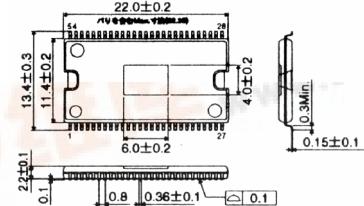

SSOP-A54

## ● Electrical characteristics

(Unless otherwise noted,  $T_a=25^\circ C$ ,  $PreVcc=PowVcc1=PowVcc2=PowVcc3=8V$ ,  $BIAS=1.65V$ ,  $R_L=8\Omega$  )

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Standby current ( $VCC+PowVcc$ )	$I_{QST}$	—	—	1	mA	No load
Quiescent current	$I_Q$	—	22	30	mA	No load
<BTL driver>						
Close loop gain	$G_{VC}$	10	11.5	14	dB	$V_{IN}=BIAS \pm 0.5V$
Maximum output voltage	$V_{OM}$	4.8	5.4	—	V	$V_{IN}=BIAS \pm 1.65V$
Output offset voltage	$V_{OO}$	-50	0	50	mV	
<Pre-operational amplifier & Operational amplifier>						
Input bias current	$I_B$	—	—	0.3	$\mu A$	
Output offset voltage	$V_{OP}$	-6	0	6	mV	
High level output voltage HI	$V_{OH}$	7.5	—	—	V	$BIAS=2.5V$
Low level output voltage LO	$V_{OL}$	—	—	0.5	V	$BIAS=2.5V$
Output sink current	$I_{SO}$	1	—	—	mA	
Output source current	$I_{SI}$	0.5	0.8	—	mA	
<Loading driver>						
Close loop gain	$LDG_{VC}$	9	11	13	dB	$LD_{CONT}=1V$
Output voltage	FWD	$V_{OL2F}$	4.8	5.4	—	$V$
	REV	$V_{OL2R}$	—	-5.4	-4.8	
Load regulation	FWD	$V_{LI2F}$	—	0.45	0.9	$V$
	REV	$V_{LI2R}$	—	0.45	0.9	
Line regulation	FWD	$V_{LVSF}$	-0.5	—	0.5	$V$
	REV	$V_{LVSR}$	-0.5	—	0.5	
Output offset voltage	$LDV_{OO}$	-50	0	50	mV	Brake mode
<Regulators>						
Output voltage	$V_{REG}$	—	3.32	—	V	$I_L=50mA$ , Note) reference value
Load regulation	$V_{RL}$	-40	0	20	mV	$I_L=0\sim200mA$ , 3.3V set up
Line regulation	$V_{VCC}$	-20	10	40	mV	$V_{CC}=6\sim13V$ , 3.3V set up
REG.P pin voltage	$V_{REGP}$	1.14	1.2	1.26	V	

※ This product is not designed for protection against radioactive rays.

## ● Application circuit

