

75Ω driver IC with 3 internal circuits BA7622F

The BA7622F is a 75Ω driver-IC developed for use in video equipment. It includes three 75Ω driver circuits, two of which have sync-tip clamp inputs. The other driver has a biased input terminated with a 20kΩ resistor. Each output can drive two loads ($75\Omega \times 2$).

● Applications

Video cassette recorders, televisions and camcorders

● Features


- 1) Two built-in clamp circuits.
- 2) Simultaneous drive of Y, C and composite video signals possible.
- 3) Each output can drive two loads.

● Absolute maximum ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Limits	Unit
Power supply voltage	Vcc	8.0	V
Power dissipation	Pd	550*	mW
Operating temperature	Topr	- 25 ~ + 75	°C
Storage temperature	Tstg	- 55 ~ + 125	°C

* Reduced by 5.5mW for each increase in T_a of 1°C over 25°C .

● Block diagram

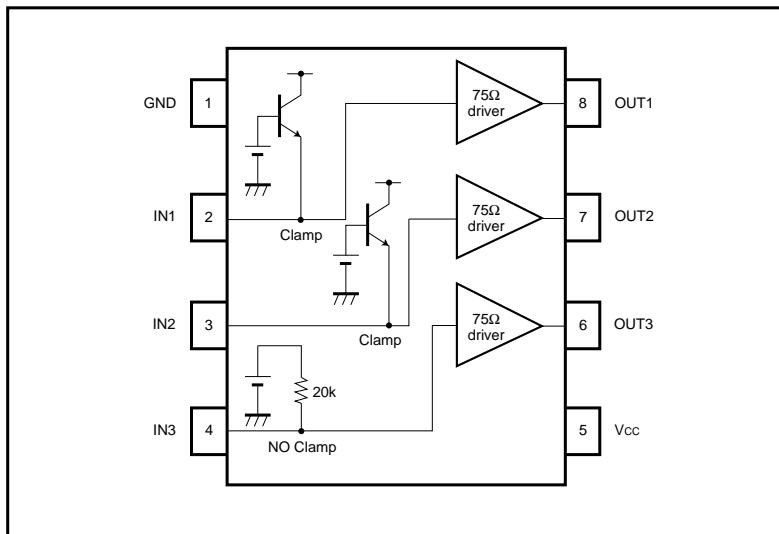

● Pin descriptions


Pin No.	Pin name	Function
1	GND	Ground connection
2	IN1	Clamp input Input composite video or the Y signal separated from Y / C.
3	IN2	Clamp input Input composite video or the Y signal separated from Y / C.
4	IN3	Biased input Input the chroma signal. Terminated with a 20kΩ resistor.
5	Vcc	Power supply
6	OUT3	Biased output Output for the signal input to IN3. When connected to earth a protection circuit operates, and the IC enters power-save mode.
7	OUT2	Clamped output Output for the signal input to IN2. When connected to earth a protection circuit operates, and the IC enters power-save mode.
8	OUT1	Clamped output Output for the signal input to IN1. When connected to earth a protection circuit operates, and the IC enters power-save mode.

- Electrical characteristics (unless otherwise noted, $T_a = 25^\circ\text{C}$ and $V_{cc} = 5\text{V}$, and load is two system drive)


Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Operating voltage	V_{cc}	4.5	5.0	5.5	V	—
Circuit current	I_{cc}	—	23.6	35.4	mA	No signal
Maximum output level	V_{om}	2.8	3.3	—	$\text{V}_{\text{P-P}}$	$f = 1\text{kHz}$, THD = 1.0%
Voltage gain	G_v	-1.2	-0.6	0	dB	$f = 1\text{MHz}$, $V_{IN} = 2.0\text{V}_{\text{P-P}}$
Frequency characteristics	G_f	-3	0	1.3	dB	$10\text{MHz} / 1\text{MHz}$, $V_{IN} = 1.0\text{V}_{\text{P-P}}$
Differential gain 75Ω drive 1	DG_1	—	0.4	1.0	%	$V_{IN} = 2.0\text{V}_{\text{P-P}}$, standard staircase signal
Differential phase 75Ω drive 1	DP_1	—	0.4	1.0	deg	$V_{IN} = 2.0\text{V}_{\text{P-P}}$, standard staircase signal
Differential gain 75Ω drive 2	DG_2	—	0.7	2.0	%	$V_{IN} = 2.0\text{V}_{\text{P-P}}$, standard staircase signal
Differential phase 75Ω drive 2	DP_2	—	0.7	2.0	deg	$V_{IN} = 2.0\text{V}_{\text{P-P}}$, standard staircase signal
Interchannel crosstalk	C_T	—	-60	—	dB	$f = 4.43\text{MHz}$, $V_{IN} = 2.0\text{V}_{\text{P-P}}$
Input impedance (V_{IN3})	Z_{IN3}	17	20	23	k Ω	—
Total-harmonic distortion (V_{IN3})	T_{HD32}	—	0.1	0.5	%	$f = 1\text{kHz}$, $V_{IN} = 1.0\text{V}_{\text{P-P}}$

- Input / output circuits


OUT1, 2, 3



IN1, 2

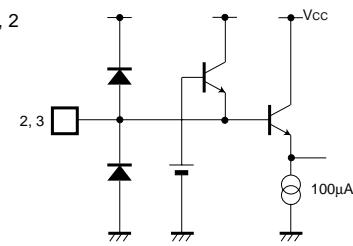

IN3

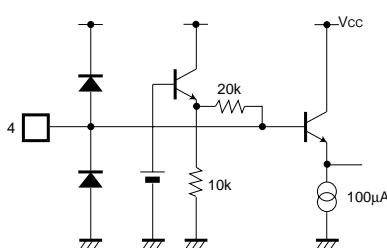

● Measurement circuit

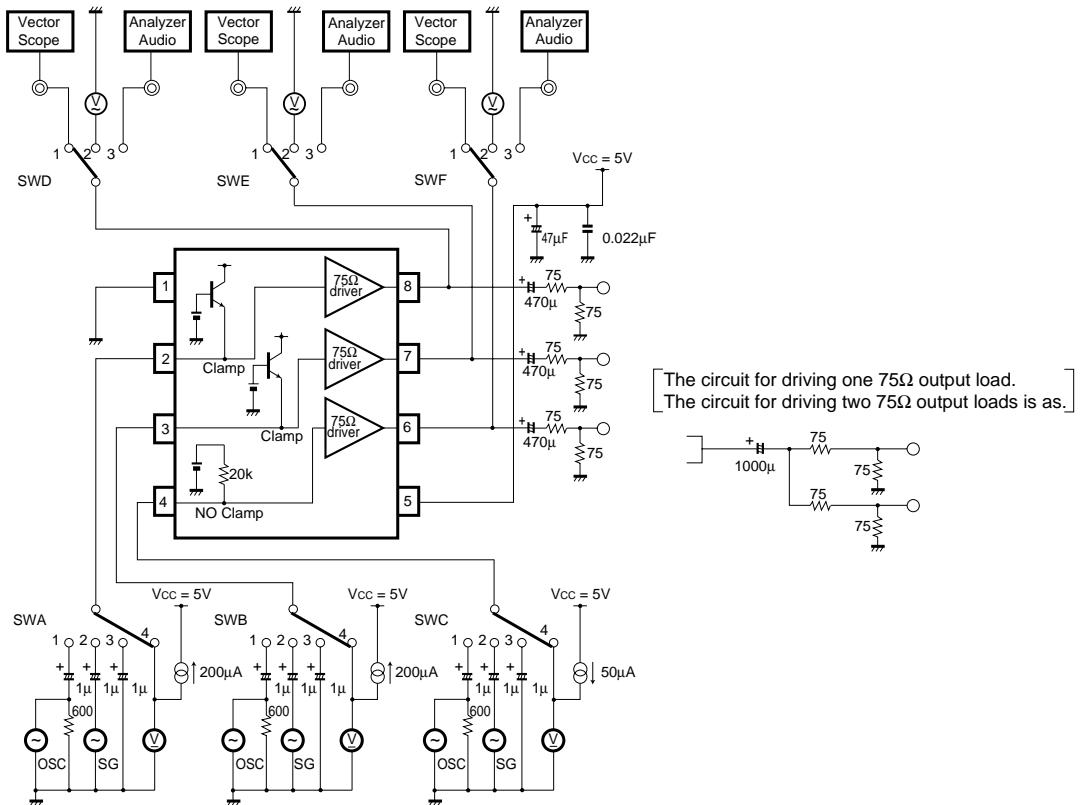


Fig.1

● Measurement conditions

Parameter	Symbol	IN1	IN2	IN3	OUT1	OUT2	OUT3	Conditions
		SWA	SWB	SWC	SWD	SWE	SWF	
Current dissipation	I _{CC}	3	3	3	×	×	×	—
Maximum output level	V _{om12}	1	3	3	3	×	×	*1
	V _{om22}	3	1	3	×	3	×	
	V _{om32}	3	3	1	×	×	3	
Voltage gain	G _{v12}	1	3	3	3	×	×	*2
	G _{v22}	3	1	3	×	3	×	
	G _{v32}	3	3	1	×	×	3	
Frequency characteristic	f ₁₂	1	3	3	3	×	×	—
	f ₂₂	3	1	3	×	3	×	
	f ₃₂	3	3	1	×	×	3	
Interchannel crosstalk	C _{r112}	1	3	3	×	3	×	—
	C _{r113}	1	3	3	×	×	3	
	C _{r211}	3	1	3	3	×	×	
	C _{r213}	3	1	3	×	×	3	
	C _{r311}	3	3	1	3	×	×	
	C _{r312}	3	3	1	×	3	×	
Input resistance	Z _{in3}	3	3	4	×	×	×	*3
Total-harmonic distortion	T _{HD12}	1	3	3	3	×	×	*4
	T _{HD22}	3	1	3	×	3	×	
	T _{HD32}	3	3	1	×	×	3	

X: Any of switches 1, 2, or 3 possible.

*1: Connect a distortion meter to the output, and input a f = 1kHz sine wave. Adjust the input level until the output distortion is 0.5%. This output voltage at this time is the maximum output level V_{om} (V_{P-P}).

*2: Input a 2.0V_{P-P}, 1MHz sine wave. The voltage gain is given by G_v = 20 log (V_{OUT} / V_{IN}).

*3: Measure the input pin voltage V_{IN50} when a current of DC50μA is flowing into the input pin. Measure the input pin open-circuit voltage V_{IN0}.
The input impedance is given by Z = (V_{IN50} - V_{IN0}) / 50*10⁻⁶[Ω].

*4: Input a 1.0V_{P-P}, 1kHz sine wave. Connect a distortion meter to the output and measure the total-harmonic distortion.

● Application example

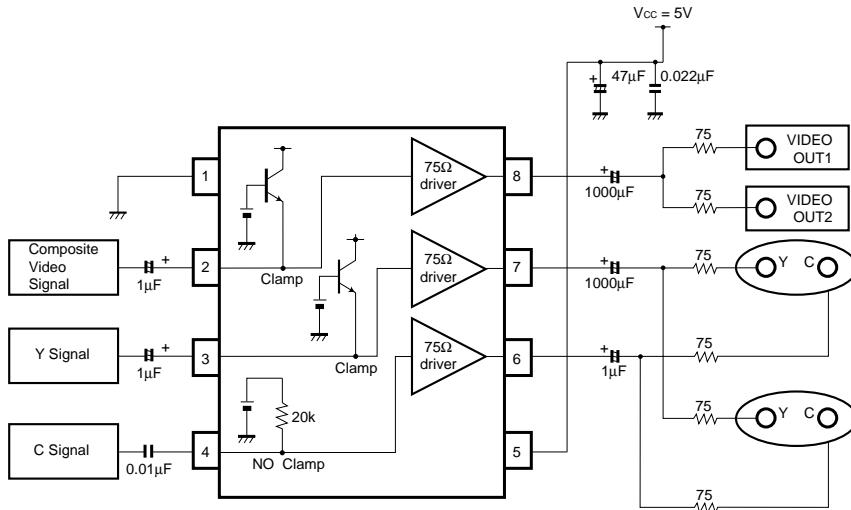


Fig.2

● Electrical characteristic curves

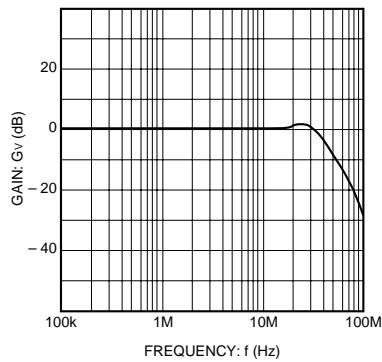


Fig. 3 Frequency characteristic

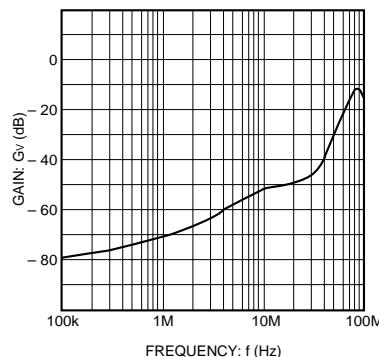


Fig. 4 Crosstalk

● External dimensions (Units: mm)

