

JQX-10FF

MINIATURE HIGH POWER RELAY

CALUS
File No.:134517



File No.:CQC02001001955



Features

- * Long life (minimum 100,000 electrical operations)
- * DPDT and 3PDT configurations
- * Industry standard 8 or 11 round termination
- * Matching sockets available

CONTACT DATA

Contact Arrangement	2C, 3C
Initial Contact Resistance Max.	50mΩ (at 1A 6VDC)
Contact Material	Silver Alloy
Contact Rating (Res. Load)	2C:10A 250VAC/30VDC 3C:10A/5A(NO/NC) 250VAC/30VDC
Max. switching voltage	250VAC/120VDC
Max. switching current	10A
Max. switching power	300W/2500VA
Mechanical life	1 x 10 ⁷ OPS
Electrical life	1 x 10 ⁵ OPS

CHARACTERISTICS

Initial Insulation Resistance		500MΩ, 500VDC
Dielectric Strength	Between coil and Contacts	1500VAC 1min.
	Between open contacts	1000VAC 1min.
Operate time (at nomi. Volt.)		Max. 30ms
Release time (at nomi. Volt.)		Max. 20ms
Temperature rise (at nomi. Volt.)		50°C
Shock Resistance	Functional	100 m/s ²
	Destructive	500 m/s ²
Vibration Resistance		1.5mm, 10 to 55Hz
Humidity		98%, +40°C
Ambient temperature		-40°C to +55°C
Termination		Octal and Undecal Type Plug
Unit weight		85g
Construction		Dust Cover

COIL

Coil power	1.5W/2.7VA
------------	------------

COIL DATA

Nominal Voltage VDC	Pick-up Voltage VDC	Drop-out Voltage VDC	Max. allowable Voltage VDC(at 20°C)	Coil Resistance Ω
6	4.80	0.60	7.20	23.5 ± 10%
12	9.60	1.20	14.40	95 ± 10%
24	19.2	2.40	28.80	430 ± 10%
48	38.4	4.80	57.60	1630 ± 10%
100	80.0	10.0	120.0	6800 ± 10%
110	88.0	11.0	132.0	7300 ± 10%

Nominal Voltage VAC	Pick-up Voltage VAC	Drop-out Voltage VAC	Max. allowable Voltage VAC(at 20°C)	Coil Resistance Ω
6	4.80	1.80	7.20	3.9 ± 10%
12	9.60	3.60	14.40	16.3 ± 10%
24	19.2	7.20	28.80	70 ± 10%
48	38.4	14.4	57.60	315 ± 10%
110/120	88.0	36.0	132.0	1600 ± 10%
220/240	176	72.0	264.0	6800 ± 10%

SAFETY APPROVAL RATINGS

UL	10A 250VAC/30VDC
	1/3HP 120VAC
	1/3HP 240VAC
	1/2HP 277VAC



HONGFA RELAY
ISO9001*ISO/TS16949 *ISO14001 CERTIFIED


VERSION: EN02-20040601

ORDERING INFORMATION


JQX-10FF /		012	A	2Z	D
Type					
Coil voltage	DC: 6, 12, 24, 48, 100, 110 AC: 6, 12, 24, 48, 110/120, 220/240				
Coil Source	A: AC Nil: DC				
Contact arrangement	2Z: DPDT 3Z: 3PDT 3Z-1: 3PDT Different Wiring Diagram (See the following)				
LED	D: With LED Nil: Without LED				

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Outline Dimensions

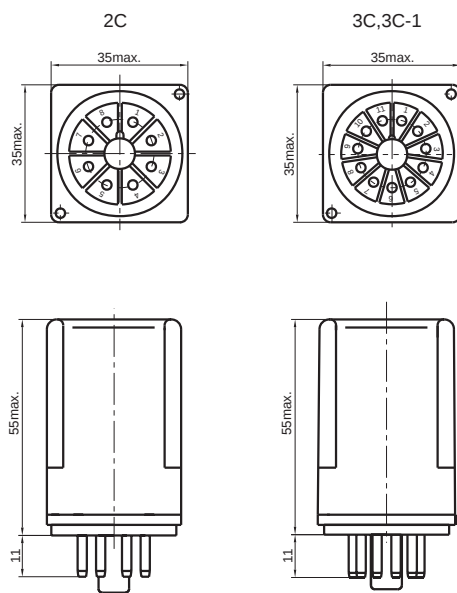


Wiring Diagram

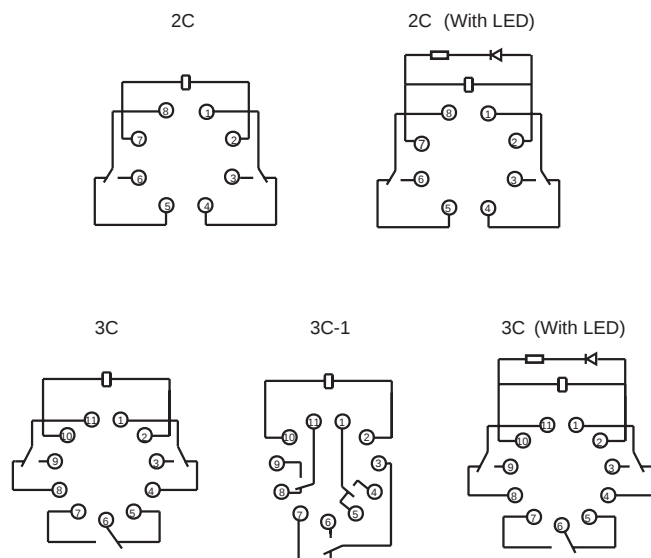


CHARACTERISTICS CURVE

LIFE CURVE



MAXIMUM SWITCHING POWER

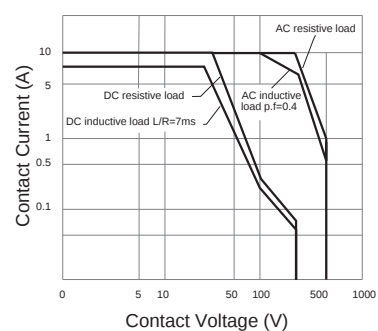

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com