




BCM8120 PRODUCT Brief

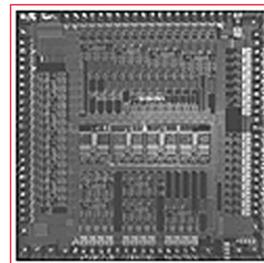

MULTI-RATE 10 Gbps 16:1 MULTIPLEXER WITH CLOCK GENERATION


BCM8120 FEATURES


- Fully integrated multi-rate clock multiplication unit (CMU) and multiplexer (MUX)
- Multi-rate serial output data and clock
- 16:1 multiplexer with LVDS parallel data and clock inputs
- User-selectable reference clock frequency
- On-chip 16 x 10 FIFO eliminates system timing issues
- Lock detect
- Core power supply: 1.8V
- I/O power supply: CML, LVDS, and LVPECL at 1.8V and CMOS at 1.8 or 3.3V
- Power consumption: 580 mW typical @ 1.8V
- Standard CMOS fabrication process
- 15 x 15 mm, 120-pin BGA package

SUMMARY OF BENEFITS

- Provides compliance with Optical Internetworking Forum (OIF), IEEE 802.3ae, Telcordia, and ITU-T industry standards.
- Reduces design cycle and time to market.
- High level of integration allows for higher port density solutions.
- CMOS-based device uses the most effective silicon economy of scale.
- Low power consumption eliminates the need for external cooling sources.
- Target applications:
 - Transmission equipment
 - Optical modules
 - ADD/DROP multiplexers
 - Digital cross-connects
 - ATM switch backbone
 - Test equipment
 - Terabit routers
 - Edge routers
 - Network Interface Cards (NIC)
 - Hubs and repeaters

Application Block Diagram

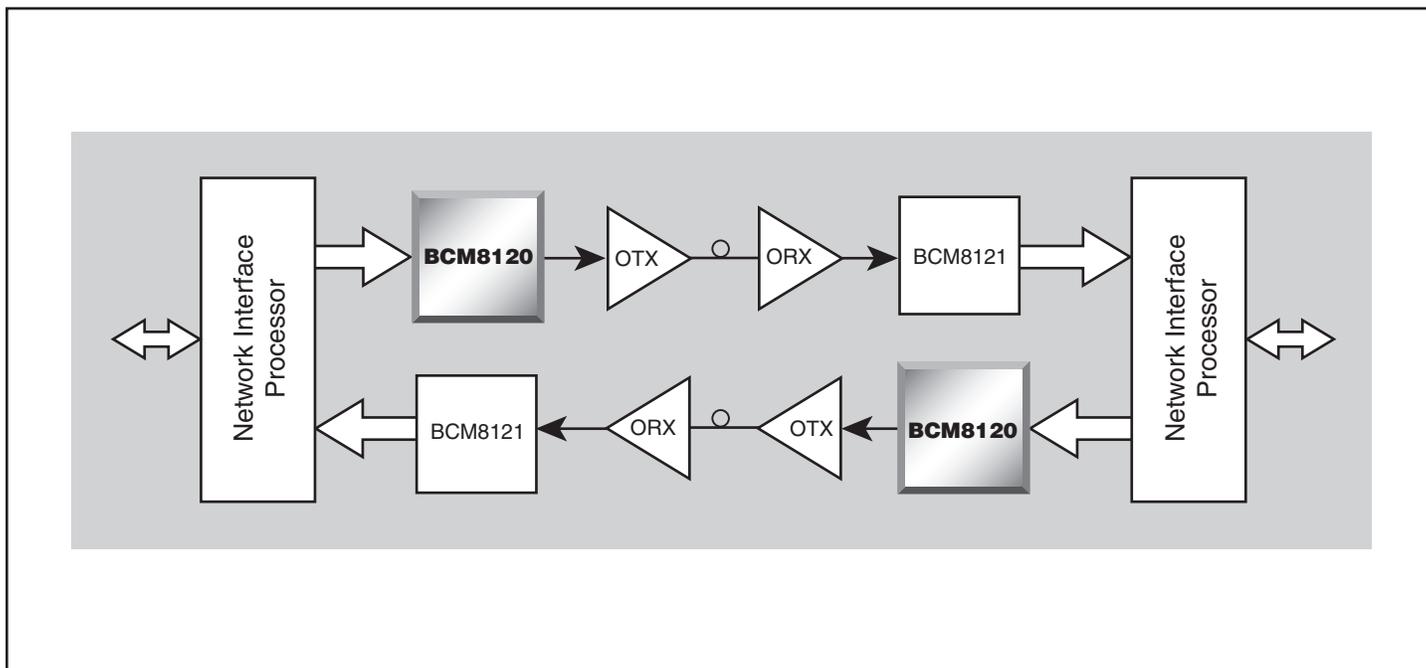

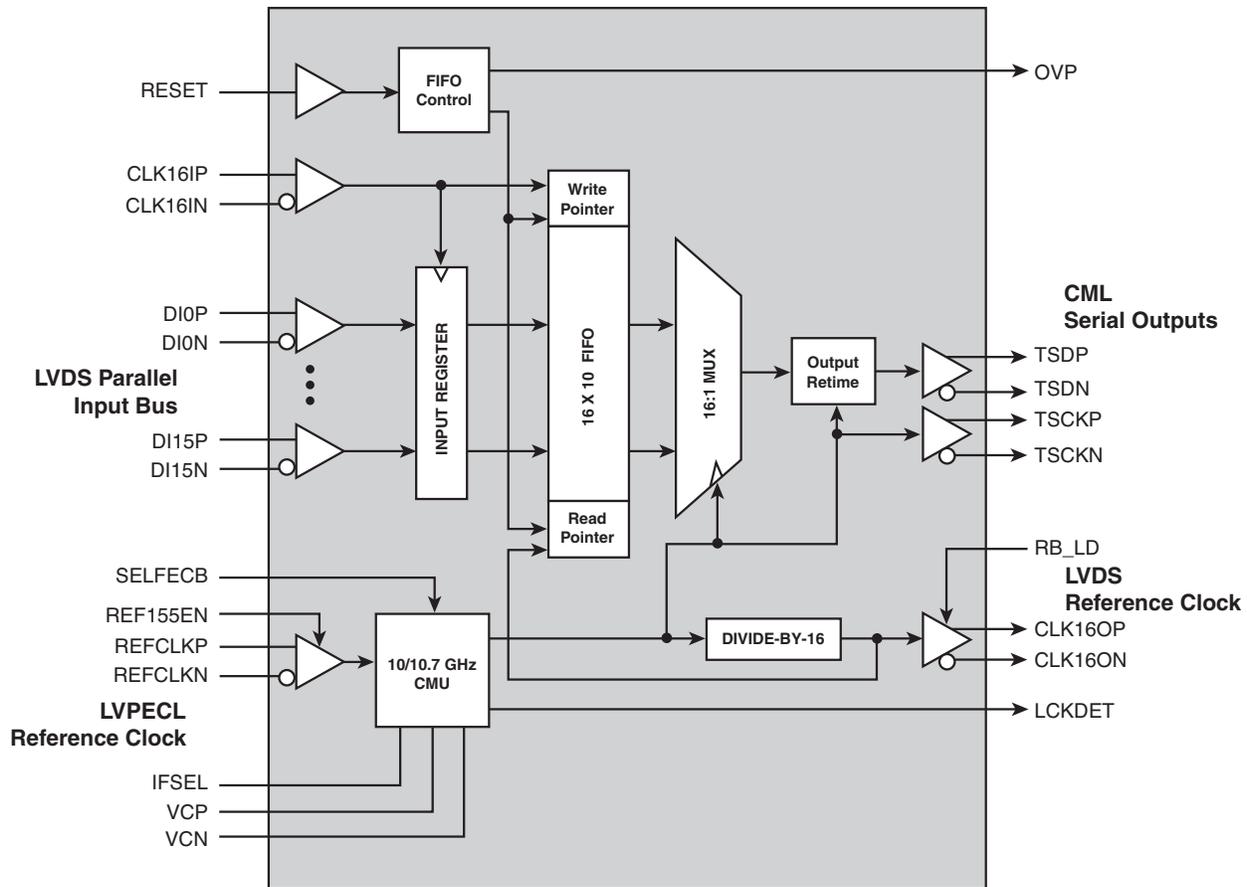

The BCM8120 is a fully integrated multi-rate SONET/SDH transmitter operating at OC-192/STM-64 (9.953 Gbps) and two FEC (Forward Error Correction) data rates (10.664 and 10.709 Gbps) with serializer, and CMU. The low-jitter LVDS interface and the onboard low-jitter PLL meets Optical Internetworking Forum (OIF), IEEE 802.3ae, Telcordia, ANSI, and ITU-T jitter standards.

The BCM8120 reference clock input frequency is user-selectable to the line rate divided by either 16 or 64. A 10-word FIFO serves to decouple the parallel input timing domain from the serial output timing domain. The BCM8120 provides a CML serial output clock to retime the data at the optical interface.

The BCM8120 can be powered with a single 1.8V supply or dual 1.8/3.3V supply without any special power supply sequencing requirements.

The major transmitter functions are:

- Configurable multi-rate CMU and data rates
- CML transmit serial data output
- 16-bit parallel LVDS input
- Selectable reference clock frequencies
- Parallel-to-serial conversion
- Elastic buffering FIFO with overflow indicator
- Lock detect

Broadcom®, the pulse logo, and Connecting everything® are trademarks of Broadcom Corporation and/or its subsidiaries in the United States and certain other countries. All other trademarks are the property of their respective owners.

Connecting
everything®



BROADCOM CORPORATION
16215 Alton Parkway, P.O. Box 57013
Irvine, California 92619-7013

© 2003 by BROADCOM CORPORATION. All rights reserved.
8120-PB04-R-06.25.03

Phone: 949-450-8700
FAX: 949-450-8710
Email: info@broadcom.com
Web: www.broadcom.com