



# MOS DIGITAL INTEGRATED CIRCUIT $\mu$ PD2819C

## PHASE LOCKED LOOP FREQUENCY SYNTHESIZER CMOS LSI


### DESCRIPTION

The  $\mu$ PD2819C is a CMOS LSI for a Phase Locked Loop Frequency Synthesizer for Digital Tuning System. The  $\mu$ PD2819C is packaged in a 18 pin plastic dual in-line package (DIP).

### FEATURES

- Programmable divider : divided-by 20 to 7999 (BCD)
- Reference divider :  $f_{ref} = 10\text{kHz}, 9\text{kHz}, 5\text{kHz}, 4.5\text{kHz}, 2.5\text{kHz}, 1\text{kHz}$
- Phase detector
- Reference oscillation circuit : 5.76MHz
- Filter amplifier :  $V_{DD2} = 20\text{V(max.)}$  open drain
- Serial data input : Numbers of lead wires=3
- Two programmable divider inputs can be selected with program
- Data input terminal can withstand input voltage higher than supply voltage  
:  $V_{IH2} = 0.7V_{DD1}$  to 15V
- Clock pulse output for a controller : 360kHz and 25Hz (open drain)
- Un-locked signal is detected as instant stop "IS" terminal  
: locked ... high level, un-locked ... pulsed wave
- High speed and low power consumption due to CMOS
- Single power supply  
:  $V_{DD1} = 5 \pm 0.5$  volts
- Operating temperature  $T_{opt} = -35$  to + 75 degrees centigrade

### PACKAGE DIMENSIONS (Unit : mm)

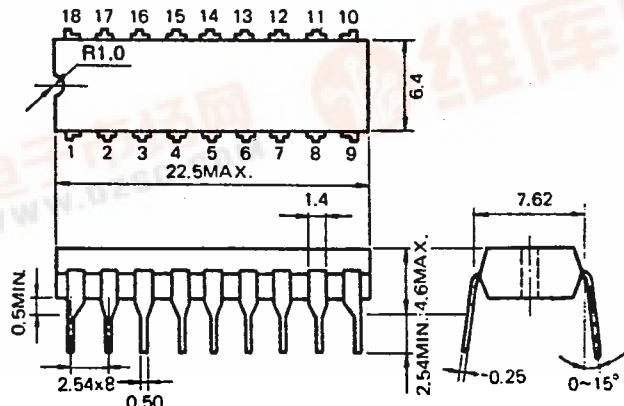

PD2819C


NEC ELECTRONIC DEVICE

6427525 NEC ELECTRONICS INC

98D 17426

D7-77-05-05


## BLOCK DIAGRAM

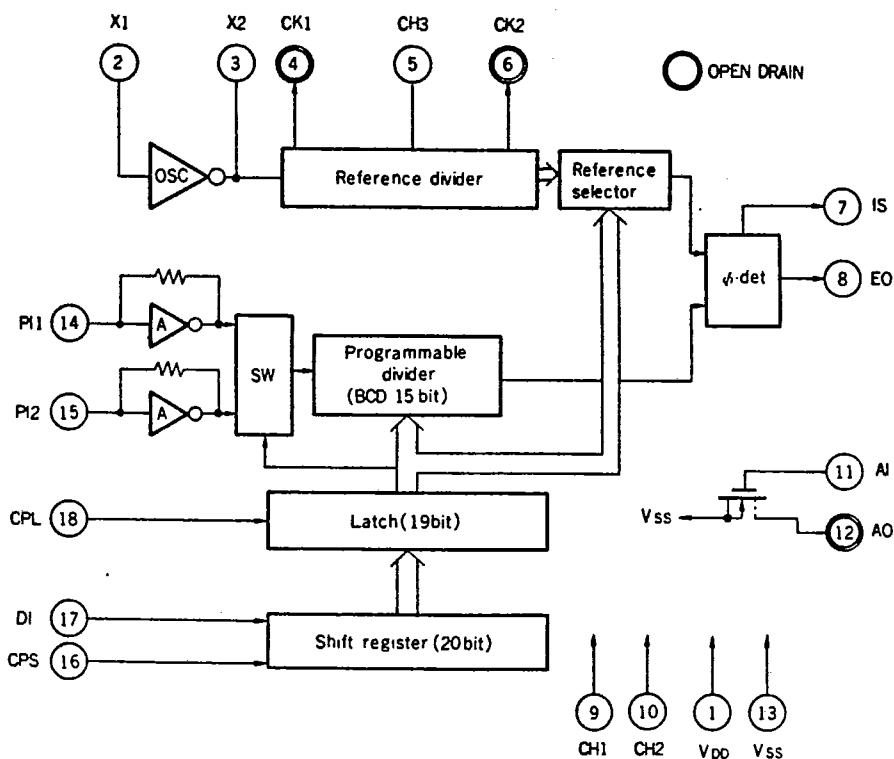


## PIN CONNECTION

PIN#	SYMBOL	DESCRIPTION
1	VDD	POWER SUPPLY (VDD = 5 ±0.5V)
2	X1	X-tal OSCILLATOR (5.76MHz)
3	X2	
4	CK1	CLOCK OUTPUT (360kHz) OPEN DRAIN
5	CH3	CHECK TERMINAL (90kHz)
6	CK2	CLOCK OUTPUT (25Hz) OPEN DRAIN
7	IS	INSTANT STOP OUTPUT
8	EO	CHARGE PUMP OUTPUT (THREE STATE)
9	CH1	CHECK TERMINAL (REFERENCE FREQUENCY)
10	CH2	CHECK TERMINAL (PROGRAMMABLE DIVIDER OUTPUT)
11	AI	ACTIVE FILTER INPUT
12	AO	ACTIVE FILTER OUTPUT (OPEN DRAIN)
13	VSS	GROUND
14	PI1	PROGRAMMABLE DIVIDER INPUT
15	PI2	PROGRAMMABLE DIVIDER INPUT
16	CPS	SHIFT REGISTER CLOCK INPUT
17	DI	SHIFT REGISTER DATA INPUT
18	CPL	LATCH CLOCK INPUT

## INPUT PROGRAM DATA

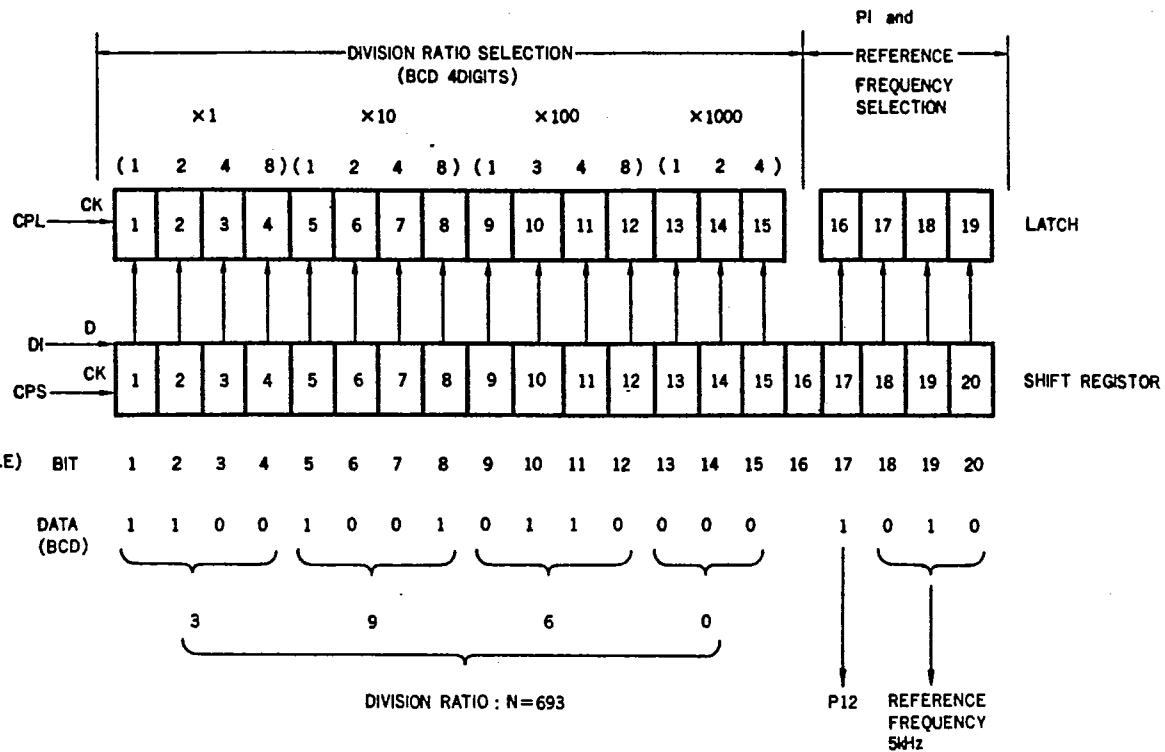

## DATA WAVE FORM (EXAMPLE)

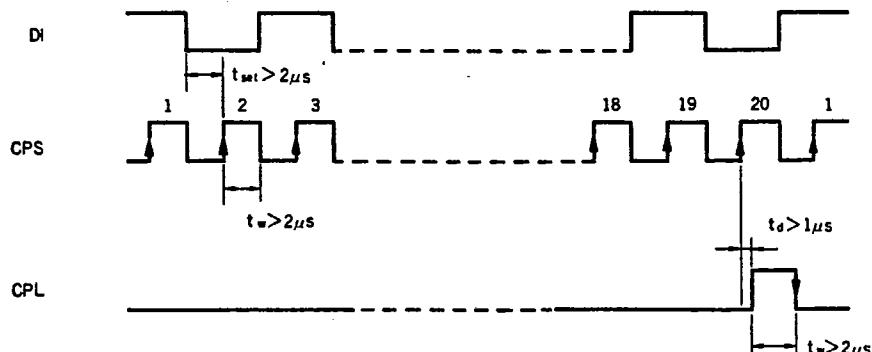

(Note)

- 16th bit of shift register is a dummy.
- The data is shifted at positive edge of clock pulse (CPS).
- The data is latched at negative edge of latch pulse (CPL)

## SELECTION OF PROGRAMMABLE DIVIDER INPUT AND REFERENCE FREQUENCY

17th bit	programmable divider input
0	PI1
1	PI2

reference frequency	18th bit	19th bit	20th bit
9	1	0	0
4.5	1	1	0
1	1	1	1
10	0	0	0
5	0	1	0
2.5	0	1	1

N E C ELECTRONICS INC 98 DE 6427525 0017428 0 T-77-05-05

NEC ELECTRON DEVICE

PD2819C

ABSOLUTE MAXIMUM RATINGS ( $T_a = 25^\circ\text{C}$ )

Supply Voltage 1	$V_{DD1}$	-0.3 to +6.0	V	( $V_{DD}$ )
Supply Voltage 2	$V_{DD2}$	-0.3 to +20	V	(CK1, CK2, AO)
Input Voltage 1	$V_{I1}$	-0.3 to $V_{DD1}$	V	
Input Voltage 2	$V_{I2}$	-0.3 to +18	V	(CPL, CPS, DI)
Operating Temperature	$T_{opt}$	-35 to +75	$^\circ\text{C}$	
Storage Temperature	$T_{stg}$	-55 to +125	$^\circ\text{C}$	

ELECTRICAL CHARACTERISTICS ( $T_a = -35$  to  $+75^\circ\text{C}$ )

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Supply Voltage 1	$V_{DD1}$	4.5	5.0	5.5	V	
High Level Input Voltage 1	$V_{IH1}$	0.7 $V_{DD}$		$V_{DD}$	V	all inputs except CPS, CPL, DI
High Level Input Voltage 2	$V_{IH2}$	0.7 $V_{DD}$		15	V	CPS, CPL, DI
Low Level Input Voltage	$V_{IL}$	-0.3		0.3 $V_{DD}$	V	all inputs except AI, PI1, PI2
High Level Output Voltage	$V_{OH}$	0.7 $V_{DD}$		$V_{DD}$	V	all outputs, $I_{OH} = -1.0\text{mA}$
Low Level Output Voltage	$V_{OL}$	0		0.3 $V_{DD}$	V	all outputs, $I_{OL} = 1.0\text{mA}$
High Level Input Current 1	$I_{IH1}$			1.0	$\mu\text{A}$	all inputs except AI, PI1, PI2
Low Level Input Current 1	$I_{IL1}$			-1.0	$\mu\text{A}$	all inputs except AI, PI1, PI2
High Level Input Current 2	$I_{IH2}$		1.0		nA	AI
Low Level Input Current 2	$I_{IL2}$		-1.0		nA	AI
Leak Current	$I_L$		1.0		nA	EO(floating)
Maximum Frequency Response	$f_{dmax}$	5.76			MHz	X1-X2, DIVIDER, $V_{DD} = 3.5\text{V}$
	$f_{pmax}$	7.2			MHz	PI1, PI2
Total Current	$I_{DD}$			5	mA	$f_{in} = 0, f_d = 5.76\text{MHz}$
A.C. Input Voltage	$V_i$	1.0			V <sub>p-p</sub>	PI1, PI2