

## High-Speed Drivers with Dual DPST JFET Switches

### Features

- Constant On-Resistance Over Entire Analog Range
- Low Leakage
- Low Crosstalk
- Break-Before-Make Switching
- Rad Hardness

### Benefits

- Low Distortion
- Eliminates Large Signal Errors
- High Precision
- Improved Channel Isolation
- Eliminates Inadvertent Shorting Between Channels
- Fault Protection

### Applications

- Audio Switching
- Precision Switching
- Video Switching
- Video Routing
- Sample/Hold
- Aerospace

### Description



The DG183/184/185 are precision dual double-pole, single-throw (DPST) analog switches designed to provide accurate switching of video and audio signals. This series is ideally suited for applications requiring a constant on-resistance over the entire analog range.

The major difference in the devices is the on-resistance (DG183— $10\ \Omega$ , DG184— $30\ \Omega$ , DG185— $75\ \Omega$ ). Reduced errors are achieved through low leakage current ( $I_{D(on)} < 2\ nA$ ). Applications which benefit from the flat JFET

on-resistance include audio switching, video switching, and data acquisition.

To achieve fast and accurate switch performance, each device comprises four n-channel JFET transistors and a TTL compatible bipolar driver. In the on state, each switch conducts current equally well in either direction. In the off condition, the switches will block up to 20 V peak-to-peak, with feedthrough of less than  $-60\ dB$  at 10 MHz.

### Functional Block Diagram and Pin Configuration

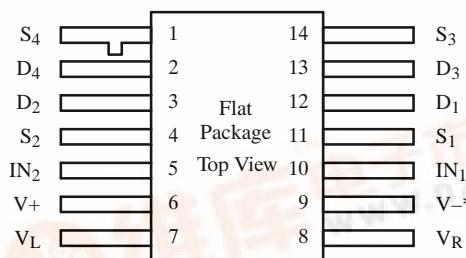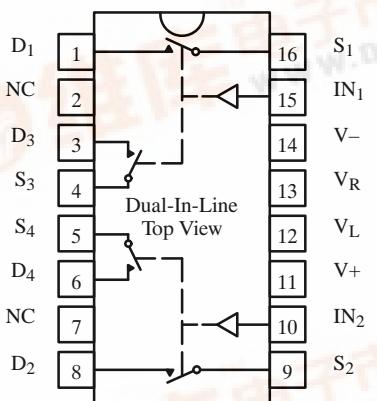

Refer to JAN38510 Information, Military Section

\*Common to Substrate and Case

Truth Table

Logic	Switch
0	OFF
1	ON

Logic "0"  $\leq 0.8\ V$

Logic "1"  $\geq 2.0\ V$

# DG183/184/185

**TEMIC**  
Semiconductors

## Ordering Information

Temp Range	Package	Part Number
-25 to 85°C	16-Pin Sidebrazed	DG183BP
		DG184BP
-55 to 125°C	16-Pin Sidebrazed	DG183AP/883
		DG184AP/883, JM38510/11103BEA
		DG185AP/883, JM38510/11104BEA
	14-Pin Flat Pack	JM38510/11103BXA JM38510/11104BXA

## Absolute Maximum Ratings

V+ to V-	36 V	Current (S or D) DG184, DG185	30 mA
V+ to V <sub>D</sub>	33 V	Current (All Other Pins)	30 mA
V <sub>D</sub> to V-	33 V	Storage Temperature	-65 to 150°C
V <sub>D</sub> to V <sub>P</sub>	±22 V	Power Dissipation <sup>a</sup>	
V <sub>L</sub> to V-	36 V	16-Pin Sidebrazed <sup>b</sup>	900 mW
V <sub>L</sub> to V <sub>IN</sub>	8 V	14-Pin Flat Pack <sup>c</sup>	900 mW
V <sub>L</sub> to V <sub>R</sub>	8 V		
V <sub>IN</sub> to V <sub>R</sub>	8 V		
V <sub>R</sub> to V-	27 V		
V <sub>R</sub> to V <sub>IN</sub>	2 V		
Current (S or D) DG183	200 mA		

### Notes:

- a. All leads welded or soldered to PC Board.
- b. Derate 12 mW/°C above 75°C
- c. Derate 10 mW/°C above 75°C

## Schematic Diagram (Typical Channel)

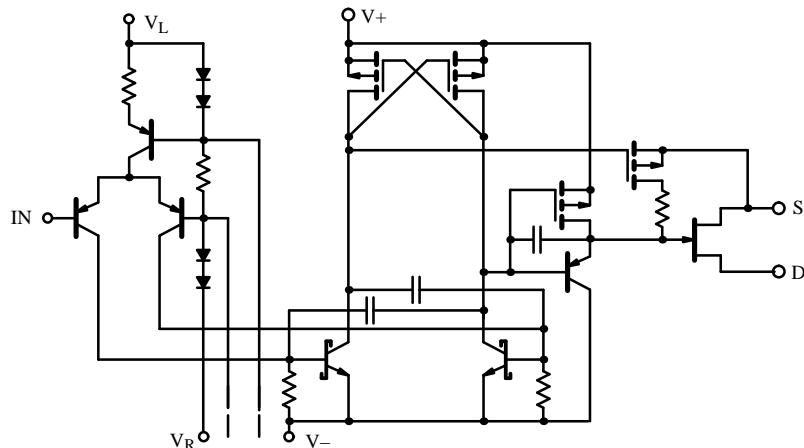


Figure 1.

Specifications<sup>a</sup> for DG183

Parameter	Symbol	Test Conditions Unless Otherwise Specified $V_+ = 15 \text{ V}$ , $V_- = -15 \text{ V}$ , $V_L = 5 \text{ V}$ $V_R = 0 \text{ V}$ , $V_{IN} = 0.8 \text{ V}$ or $2 \text{ V}^f$	Temp <sup>b</sup>	Typ <sup>c</sup>	A Suffix -55 to 125°C		B Suffix -25 to 85°C		Unit
					Min <sup>d</sup>	Max <sup>d</sup>	Min <sup>d</sup>	Max <sup>d</sup>	
<b>Analog Switch</b>									
Analog Signal Range <sup>e</sup>	$V_{ANALOG}$		Full		-7.5	15	-7.5	15	V
Drain-Source On-Resistance	$r_{DS(on)}$	$I_S = -10 \text{ mA}$ , $V_D = -7.5 \text{ V}$	Room Full	7.5		10 20		15 25	$\Omega$
Source Off Leakage Current	$I_{S(off)}$	$V_S = \pm 10 \text{ V}$ , $V_D = \mp 10 \text{ V}$ $V_+ = 10 \text{ V}$ , $V_- = -20 \text{ V}$	Room Hot	0.05		10 1000		15 300	nA
		$V_S = \pm 7.5 \text{ V}$ , $V_D = \mp 7.5 \text{ V}$	Room Hot	0.05		10 1000		15 300	
Drain Off Leakage Current	$I_{D(off)}$	$V_S = \pm 10 \text{ V}$ , $V_D = \mp 10 \text{ V}$ $V_+ = 10 \text{ V}$ , $V_- = -20 \text{ V}$	Room Hot	0.04		10 1000		15 300	
		$V_S = \pm 7.5 \text{ V}$ , $V_D = \mp 7.5 \text{ V}$	Room Hot	0.03		10 1000		15 300	
Channel On Leakage Current	$I_{D(on)}$	$V_D = V_S = \pm 7.5 \text{ V}$	Room Hot	-0.1	-2 -200		-10 -200		
Saturation Drain Current	$I_{DSS}$	2 ms Pulse Duration	Room	300					mA
<b>Digital Input</b>									
Input Current with Input Voltage High	$I_{INH}$	$V_{IN} = 5 \text{ V}$	Room Hot	<0.01		10 20		10 20	$\mu\text{A}$
Input Current with Input Voltage Low	$I_{INL}$	$V_{IN} = 0 \text{ V}$	Full	-30	-250		-250		
<b>Dynamic Characteristics</b>									
Turn-On Time	$t_{on}$	See Switching Time Test Circuit	Room	240		400		600	ns
Turn-Off Time	$t_{off}$		Room	140		200		220	
Source-Off Capacitance	$C_{S(off)}$	$f = 1 \text{ MHz}$	$V_S = -5 \text{ V}$ , $I_D = 0$	Room	21				pF
Drain-Off Capacitance	$C_{D(off)}$		$V_D = -5 \text{ V}$ , $I_S = 0$	Room	17				
Channel-On Capacitance	$C_{D(on)}$		$V_D = V_S = 0 \text{ V}$	Room	17				
Off Isolation	OIRR	$f = 1 \text{ MHz}$ , $R_L = 75 \Omega$		Room	>55				dB
<b>Power Supplies</b>									
Positive Supply Current	$I_+$	$V_{IN} = 0 \text{ V}$ , or $5 \text{ V}$	Room	0.6		1.5		1.5	mA
Negative Supply Current	$I_-$		Room	-2.7	-5		-5		
Logic Supply Current	$I_L$		Room	3.1		4.5		4.5	
Reference Supply Current	$I_R$		Room	-1	-2		-2		

Notes:

- a. Refer to PROCESS OPTION FLOWCHART .
- b. Room = 25°C, Full = as determined by the operating temperature suffix.
- c. Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.
- d. The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this data sheet.
- e. Guaranteed by design, not subject to production test.
- f.  $V_{IN}$  = input voltage to perform proper function.

# DG183/184/185

**TEMIC**  
Semiconductors

## Specifications<sup>a</sup> for DG184

Parameter	Symbol	Test Conditions Unless Otherwise Specified $V_+ = 15 \text{ V}$ , $V_- = -15 \text{ V}$ , $V_L = 5 \text{ V}$ $V_R = 0 \text{ V}$ , $V_{IN} = 0.8 \text{ V}$ or $2 \text{ V}^f$	Temp <sup>b</sup>	Typ <sup>c</sup>	A Suffix −55 to 125°C		B Suffix −25 to 85°C		Unit
					Min <sup>d</sup>	Max <sup>d</sup>	Min <sup>d</sup>	Max <sup>d</sup>	
<b>Analog Switch</b>									
Analog Signal Range <sup>e</sup>	$V_{ANALOG}$		Full		−7.5	15	−7.5	15	V
Drain-Source On-Resistance	$r_{DS(on)}$	$I_S = -10 \text{ mA}$ , $V_D = -7.5 \text{ V}$	Room Full	22	30 60		50 75		Ω
Source Off Leakage Current	$I_{S(off)}$	$V_S = \pm 10 \text{ V}$ , $V_D = \mp 10 \text{ V}$ $V_+ = 10 \text{ V}$ , $V_- = -20 \text{ V}$	Room Hot	0.06	1 100		5 100		nA
		$V_S = \pm 7.5 \text{ V}$ , $V_D = \mp 7.5 \text{ V}$	Room Hot	0.05	1 100		5 100		
Drain Off Leakage Current	$I_{D(off)}$	$V_S = \pm 10 \text{ V}$ , $V_D = \mp 10 \text{ V}$ $V_+ = 10 \text{ V}$ , $V_- = -20 \text{ V}$	Room Hot	0.4	1 100		5 100		
		$V_S = \pm 7.5 \text{ V}$ , $V_D = \mp 7.5 \text{ V}$	Room Hot	0.3	1 100		5 100		
Channel On Leakage Current	$I_{D(on)}$	$V_D = V_S = \pm 7.5 \text{ V}$	Room Hot	−0.02 −2 −200	−2 −200		−10 −200		
<b>Digital Input</b>									
Input Current with Input Voltage High	$I_{INH}$	$V_{IN} = 5 \text{ V}$	Room Hot	<0.01		10 20		10 20	μA
Input Current with Input Voltage Low	$I_{INL}$	$V_{IN} = 0 \text{ V}$	Full	−30	−250		−250		
<b>Dynamic Characteristics</b>									
Turn-On Time	$t_{on}$	See Switching Time Test Circuit	Room	85		150		180	ns
Turn-Off Time	$t_{off}$		Room	95		130		150	
Source-Off Capacitance	$C_{S(off)}$	$f = 1 \text{ MHz}$	$V_S = -5 \text{ V}$ , $I_D = 0$	Room	9				pF
Drain-Off Capacitance	$C_{D(off)}$		$V_D = -5 \text{ V}$ , $I_S = 0$	Room	6				
Channel-On Capacitance	$C_{D(on)}$		$V_D = V_S = 0 \text{ V}$	Room	14				
Off Isolation	OIRR	$f = 1 \text{ MHz}$ , $R_L = 75 \Omega$		Room	>50				dB
<b>Power Supplies</b>									
Positive Supply Current	$I_+$	$V_{IN} = 0 \text{ V}$ , or $5 \text{ V}$	Room	0.6		3		3	mA
Negative Supply Current	$I_-$		Room	−2.7	−5.5		−5.5		
Logic Supply Current	$I_L$		Room	3.1		4.5		4.5	
Reference Supply Current	$I_R$		Room	−1	−2		−2		

Notes:

- a. Refer to PROCESS OPTION FLOWCHART .
- b. Room = 25°C, Full = as determined by the operating temperature suffix.
- c. Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.
- d. The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this data sheet.
- e. Guaranteed by design, not subject to production test.
- f.  $V_{IN}$  = input voltage to perform proper function.

Specifications<sup>a</sup> for DG185

Parameter	Symbol	Test Conditions Unless Otherwise Specified $V_+ = 15 \text{ V}$ , $V_- = -15 \text{ V}$ , $V_L = 5 \text{ V}$ $V_R = 0 \text{ V}$ , $V_{IN} = 0.8 \text{ V}$ or $2 \text{ V}^f$	Temp <sup>b</sup>	Typ <sup>c</sup>	A Suffix -55 to 125°C		B Suffix -25 to 85°C		Unit
					Min <sup>d</sup>	Max <sup>d</sup>	Min <sup>d</sup>	Max <sup>d</sup>	
<b>Analog Switch</b>									
Analog Signal Range <sup>e</sup>	$V_{ANALOG}$		Full		-10	15	-10	15	V
Drain-Source On-Resistance	$r_{DS(on)}$	$I_S = -10 \text{ mA}$ , $V_D = -7.5 \text{ V}$	Room Full	35		75 150		100 150	$\Omega$
Source Off Leakage Current	$I_{S(off)}$	$V_S = \pm 10 \text{ V}$ , $V_D = \mp 10 \text{ V}$ $V_+ = 10 \text{ V}$ , $V_- = -20 \text{ V}$	Room Hot	0.05		1 100		5 100	$\text{nA}$
		$V_S = \pm 10 \text{ V}$ , $V_D = \mp 10 \text{ V}$	Room Hot	0.07		1 100		5 100	
Drain Off Leakage Current	$I_{D(off)}$	$V_S = \pm 10 \text{ V}$ , $V_D = \mp 10 \text{ V}$ $V_+ = 10 \text{ V}$ , $V_- = -20 \text{ V}$	Room Hot	0.4		1 100		5 100	
		$V_S = \pm 10 \text{ V}$ , $V_D = \mp 10 \text{ V}$	Room Hot	0.3		1 100		5 100	
Channel On Leakage Current	$I_{D(on)}$	$V_D = V_S = \pm 10 \text{ V}$	Room Hot	-0.03	-2 -200		-10 -200		
<b>Digital Input</b>									
Input Current with Input Voltage High	$I_{INH}$	$V_{IN} = 5 \text{ V}$	Room Hot	<0.01		10 20		10 20	$\mu\text{A}$
Input Current with Input Voltage Low	$I_{INL}$	$V_{IN} = 0 \text{ V}$	Full	-30	-250		-250		
<b>Dynamic Characteristics</b>									
Turn-On Time	$t_{on}$	See Switching Time Test Circuit	Room	120		250		300	$\text{ns}$
Turn-Off Time	$t_{off}$		Room	100		130		150	
Source-Off Capacitance	$C_{S(off)}$	$f = 1 \text{ MHz}$	$V_S = -5 \text{ V}$ , $I_D = 0$	Room	9				$\text{pF}$
Drain-Off Capacitance	$C_{D(off)}$		$V_D = -5 \text{ V}$ , $I_S = 0$	Room	6				
Channel-On Capacitance	$C_{D(on)}$		$V_D = V_S = 0 \text{ V}$	Room	14				
Off Isolation	OIRR	$f = 1 \text{ MHz}$ , $R_L = 75 \Omega$	Room	>50					$\text{dB}$
<b>Power Supplies</b>									
Positive Supply Current	$I_+$	$V_{IN} = 0 \text{ V}$ , or $5 \text{ V}$	Room	0.6		3		3	$\text{mA}$
Negative Supply Current	$I_-$		Room	-2.7	-5.5		-5.5		
Logic Supply Current	$I_L$		Room	3.1		4.5		4.5	
Reference Supply Current	$I_R$		Room	-1	-2		-2		







Notes:

- a. Refer to PROCESS OPTION FLOWCHART .
- b. Room = 25°C, Full = as determined by the operating temperature suffix.
- c. Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.
- d. The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this data sheet.
- e. Guaranteed by design, not subject to production test.
- f.  $V_{IN}$  = input voltage to perform proper function.





# DG183/184/185

**TEMIC**  
Semiconductors

## Typical Characteristics

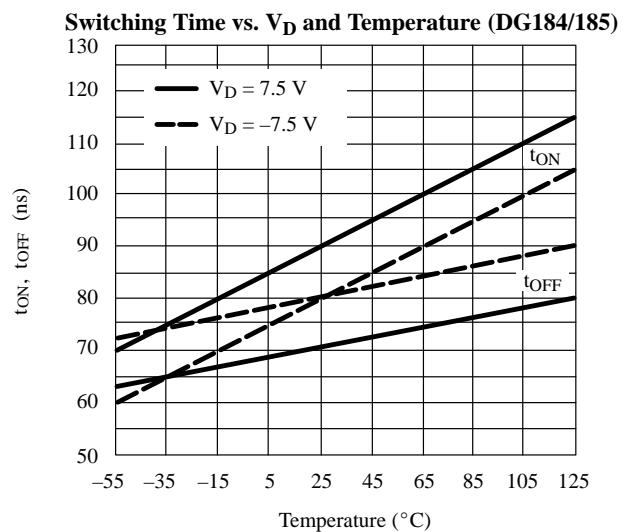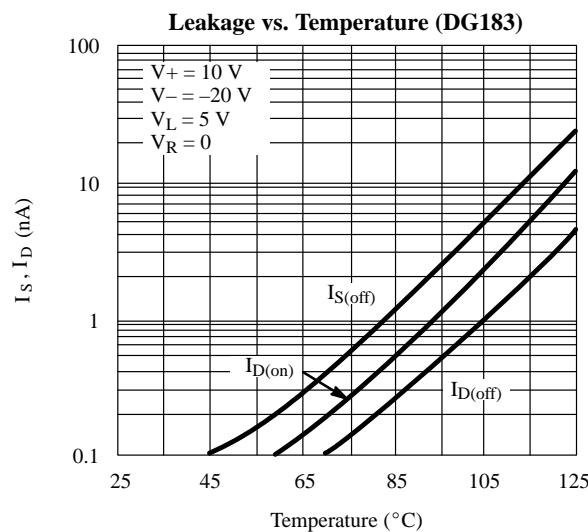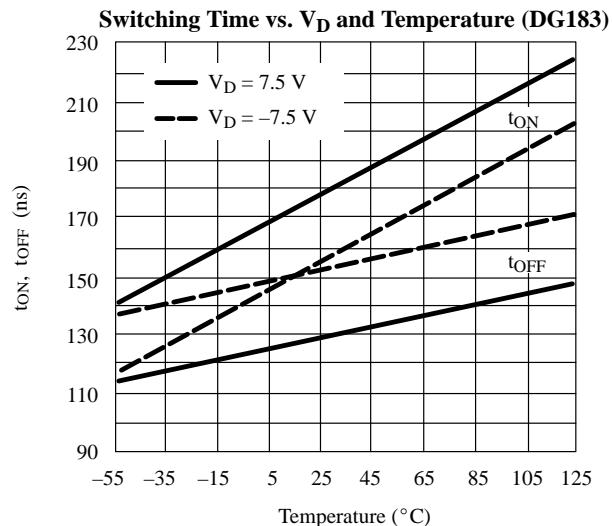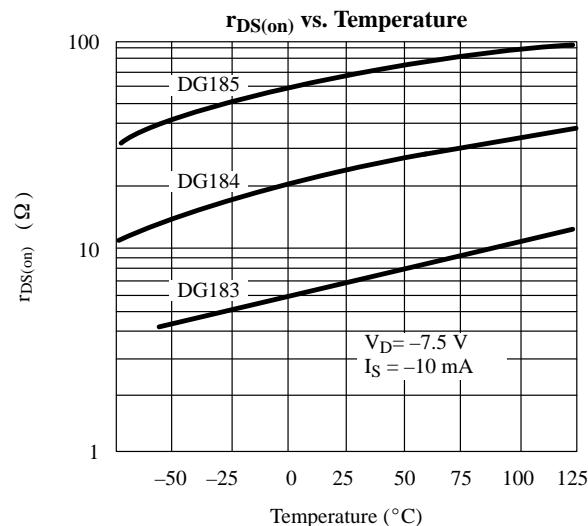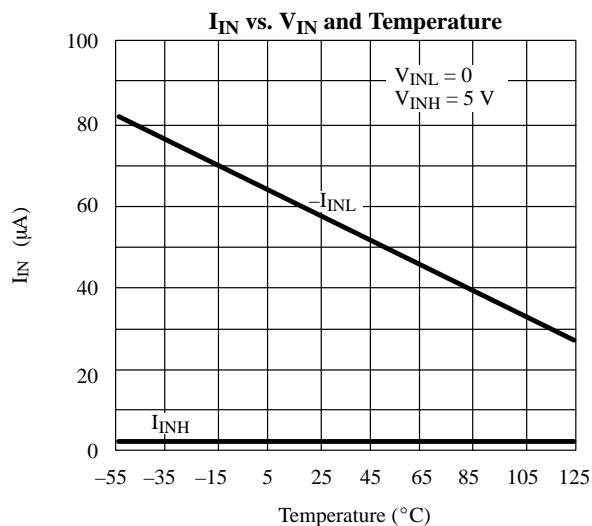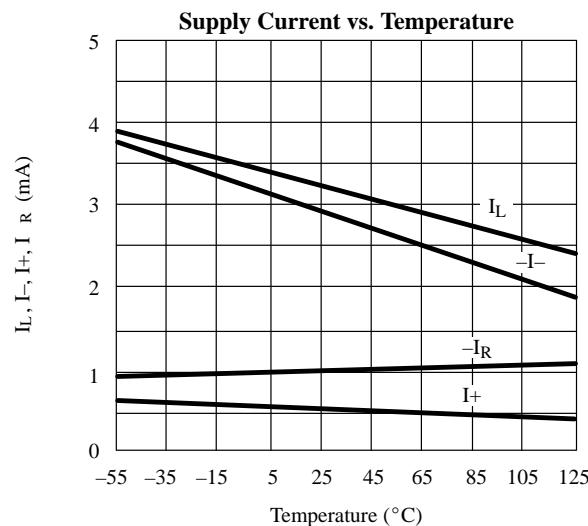

## Typical Characteristics (Cont'd)

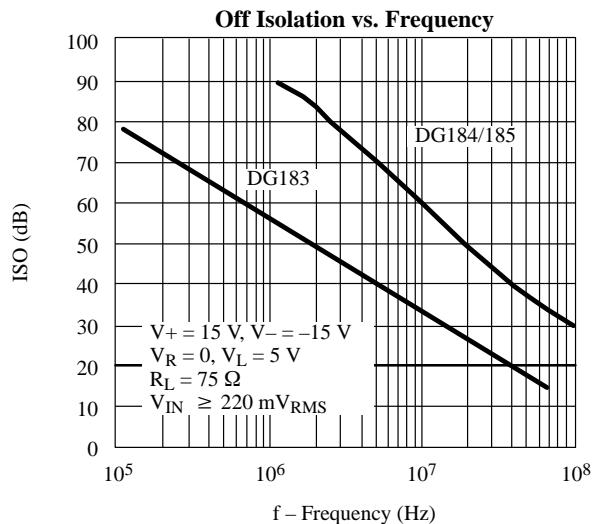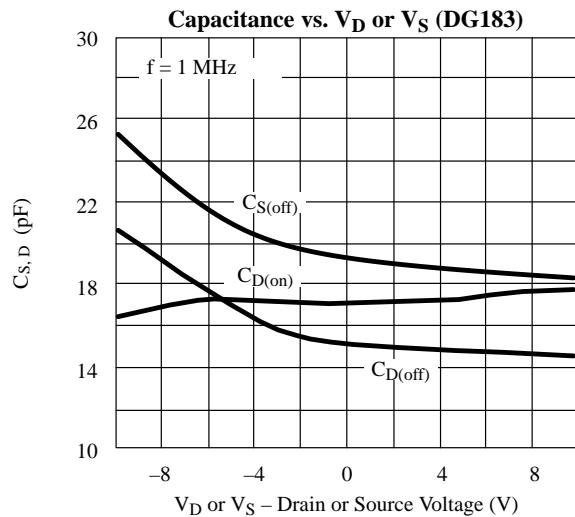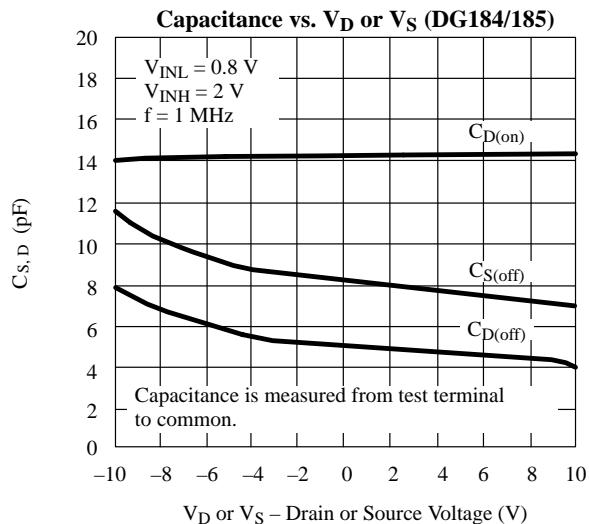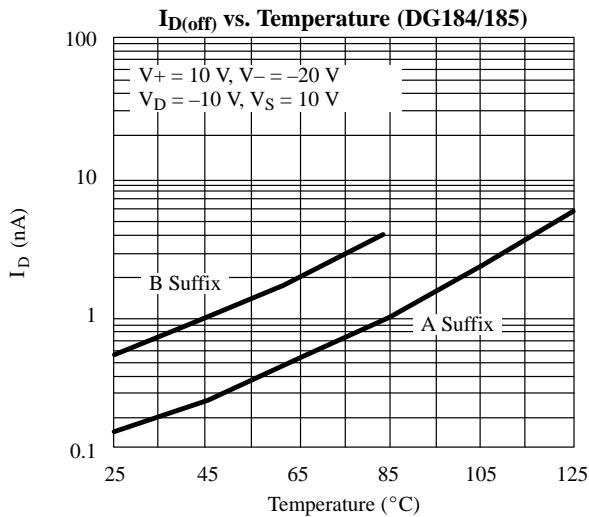


# DG183/184/185

**TEMIC**  
Semiconductors

## Test Circuits

Feedthrough due to charge injection may result in spikes at the leading and trailing edge of the output waveform.

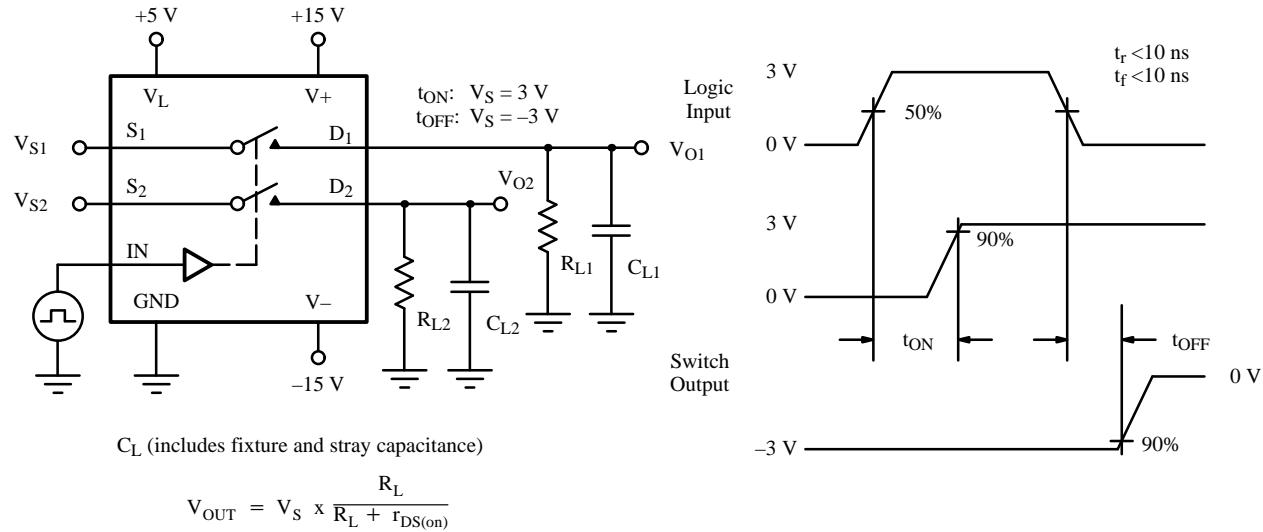

**Figure 2.** Switching Time

## Application Hints<sup>a</sup>

Switch	V <sub>+</sub> Positive Supply Voltage (V)	V <sub>-</sub> Negative Supply Voltage (V)	V <sub>L</sub> Logic Supply Voltage (V)	V <sub>R</sub> Reference Supply Voltage (V)	V <sub>IN</sub> Logic Input Voltage V <sub>INH(min)</sub> /V <sub>INL(max)</sub> (V)	V <sub>S</sub> Analog Voltage Range (V)
DG183 DG184	15 <sup>b</sup>	-15	5	GND	2.0/0.8	-7.5 to 15
	10	-20	5	GND	2.0/0.8	-12.5 to 10
	12	-12	5	GND	2.0/0.8	-4.5 to 12
DG185	15 <sup>b</sup>	-15	5	GND	2.0/0.8	-10 to 15
	10	-20	5	GND	2.0/0.8	-15 to 10
	12	-12	5	GND	2.0/0.8	-7 to 12

Notes:

- a. Application Hints are for DESIGN AID ONLY, not guaranteed and not subject to production testing.
- b. Electrical Parameter Chart based on V<sub>+</sub> = 15 V, V<sub>L</sub> = 5 V, V<sub>R</sub> = GND.