

Triple 16x5 Differential Crosspoint Switch Capable of Operation in Single-Ended or Differential Input Modes

The EL4544 is a high bandwidth 16-channel differential RGB to 5-channel RGB single-ended RGB-HV video crosspoint switch with embedded sync extraction. Four 16-channel input muxes, each capable of receiving a complete RGB video signal, and five output muxes, each capable of "seeing" any one of the four RGB inputs. Additionally, the fifth input mux has an overlay "screen on screen" function that can be displayed in conjunction with any of the stacked RGB inputs.

The EL4544 has a fast disable feature to reduce power consumption. The device also provides a presence of signal indicator by looking for syncs on a designated channel.

Ordering Information

| PART NUMBER | PACKAGE | TAPE & REEL | PKG. DWG. # |
|-------------------------|---------------------------------------|-------------|-------------|
| EL4544IGZ (See Note) | 356-Pin (27x27mm) BGA (Pb-Free) | - | - |

NOTE: Intersil Pb-free plus anneal products employ special Pb-free material sets; molding compounds/die attach materials and 100% matte tin plate termination finish, which are RoHS compliant and compatible with both SnPb and Pb-free soldering operations. Intersil Pb-free products are MSL classified at Pb-free peak reflow temperatures that meet or exceed the Pb-free requirements of IPC/JEDEC J STD-020.

Features

- Serial programming of switch array
- Parallel or serial modes
- High Z output disable
- Drives 150Ω loads
- 60MHz 0.1dB gain flatness
- -3dB bandwidth of 300MHz
- Crosstalk rejection: 75dB @ 100MHz
- Channels settle to 5% within 10ns after overlay switching
- 356-pin BGA packaging
- Pb-free plus anneal available (RoHS compliant)

Applications

- Video switching



EL4544

Pinout

EL4544 (356-PIN BGA) TOP VIEW

| | | | | | | | | | | | | | | | | | | | | | |
|----|-----|-----|-------|-------|-----|-----|-----|------|-----|-----|-----|------|-----|-----|-----|------|-------|------|-------|------|-----|
| 20 | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | |
| 19 | Vp | Vm | BpF | BpE | BpD | BpC | BpB | BpA | Bp9 | Bp8 | Bp7 | Bp6 | Bp5 | Bp4 | Bp3 | Bp2 | Bp1 | Bp0 | Vm | Vp | |
| 18 | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | |
| 17 | Vm | Vm | BnF | BnE | BnD | BnC | BnB | BnA | Bn9 | Bn8 | Bn7 | Bn6 | Bn5 | Bn4 | Bn3 | Bn2 | Bn1 | Bn0 | Vm | Vm | |
| 16 | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | |
| 15 | RpF | RnF | TMon1 | Vm | Vm | Vm | Vm | Vm | Vp | Vm | Vm | Vm | Vm | Vm | Vm | Vm | TMon2 | GnF | GpF | | |
| 14 | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | |
| 13 | RpE | RnE | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | GnE | GpE | |
| 12 | ○ | ○ | ○ | ○ | × | × | × | × | × | × | × | × | × | × | × | × | ○ | ○ | ○ | ○ | |
| 11 | RpD | RnD | Vm | Vm | | | | | | | | | | | | | Vm | Vm | GnD | GpD | |
| 10 | ○ | ○ | ○ | ○ | × | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | × | ○ | ○ | ○ | ○ | |
| 9 | RpC | RnC | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | GnC | GpC | |
| 8 | ○ | ○ | ○ | ○ | × | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | × | ○ | ○ | ○ | ○ | |
| 7 | RpB | RnB | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | GnB | GpB | |
| 6 | ○ | ○ | ○ | ○ | × | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | × | ○ | ○ | ○ | ○ | |
| 5 | RpA | RnA | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | GnA | GpA | |
| 4 | ○ | ○ | ○ | ○ | × | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | × | ○ | ○ | ○ | ○ | |
| 3 | Rp9 | Rn9 | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Gn9 | Gp9 | |
| 2 | ○ | ○ | ○ | ○ | × | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | × | ○ | ○ | ○ | ○ | |
| 1 | Rp8 | Rn8 | Vp | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vp | Gn8 | Gp8 | |
| | ○ | ○ | ○ | ○ | × | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | × | ○ | ○ | ○ | ○ | |
| | Rp7 | Rn7 | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Gn7 | Gp7 | |
| | ○ | ○ | ○ | ○ | × | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | × | ○ | ○ | ○ | ○ | |
| | Rp6 | Rn6 | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Gn6 | Gp6 | |
| | ○ | ○ | ○ | ○ | × | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | × | ○ | ○ | ○ | ○ | |
| | Rp5 | Rn5 | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Gn5 | Gp5 | |
| | ○ | ○ | ○ | ○ | × | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | × | ○ | ○ | ○ | ○ | |
| | Rp4 | Rn4 | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Gn4 | Gp4 | |
| | ○ | ○ | ○ | ○ | × | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | × | ○ | ○ | ○ | ○ | |
| | Rp3 | Rn3 | RAZ | GAZ | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | NC | NC | Gn3 | Gp3 |
| | ○ | ○ | ○ | ○ | × | × | × | × | × | × | × | × | × | × | × | × | ○ | ○ | ○ | ○ | |
| | Rp2 | Rn2 | Trans | RefOL | | | | | | | | | | | | | Vdp | Chip | Gn2 | Gp2 | |
| | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | |
| | Rp1 | Rn1 | Cal | RoL | GoL | BAZ | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | sDo | sEn | Reset | Gn1 | Gp1 |
| | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | |
| | Rp0 | Rn0 | Vp | OvI | BoL | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | Vm | sDi | sClk | Vp | Gn0 | Gp0 |
| | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | |
| | VpS | Hs | Vs | VmS | VpD | Hd | Vd | VmD | VpC | Hc | Vc | VmC | VpB | Hb | Vb | VmB | VpA | Ha | Va | VmA | |
| | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | |
| | Rs | Gs | Bs | RefS | Rd | Gd | Bd | RefD | Rc | Gc | Bc | RefC | Rb | Gb | Bb | RefB | Ra | Ga | Ba | RefA | |
| | A | B | C | D | E | F | G | H | J | K | L | M | N | P | R | T | U | V | W | Y | |

× = EMPTY LOCATION (UNPOPULATED)
 ○ = BALLGRID

EL4544

Absolute Maximum Ratings (T_A = 25°C)

| | | | |
|-----------------------|-----------------|---|-----------------|
| V _{SA} | 5.5V | Storage Temperature Range | -65°C to +150°C |
| Input Voltage | .V _S | Operating Junction Temperature | +135°C |
| V _{SD} | 3.3V | Recommended Operating Temperature | -40°C to +85°C |
| Output Current | 80mA | | |

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

IMPORTANT NOTE: All parameters having Min/Max specifications are guaranteed. Typical values are for information purposes only. Unless otherwise noted, all tests are at the specified temperature and are pulsed tests, therefore: T_J = T_C = T_A

Electrical Specifications V_{SA} = 5V, V_{SD} = 3.3V, Gain = 2, R_L = 150Ω, C_L = 2.7pF, T_A = 25°C.


| PARAMETER | DESCRIPTION | CONDITION | MIN | TYP | MAX | UNIT |
|---|--|--|------|------|-----------------|--------|
| SUPPLY CHARACTERISTICS | | | | | | |
| V _{SA} | Recommended Analog Supply Voltage | | 4.75 | 5.0 | 5.25 | V |
| V _{SD} | Recommended Digital Supply Voltage | | 2.4 | 3.3 | 3.6 | V |
| I _{SD} | Digital Supply Current | | | 3 | 10 | mA |
| I _{SA} | Analog Supply Current | Enabled - no load, all amplifiers enabled | | 685 | 790 | mA |
| | | Disabled | | 33 | 50 | mA |
| PSRR | Power Supply Rejection Ratio | 4.75V to 5.25V | | 40 | | dB |
| CHARACTERISTICS OF DIFFERENTIAL INPUTS | | | | | | |
| CMRR | Input Common Mode Rejection Ratio | 0V to 1.5V | 45 | 66 | | dB |
| A _V | Gain Accuracy for A, B, C, D, S Channels | Range of Deviation from gain of 2 (excluding overlay) | 1.85 | 2.0 | 2.15 | |
| V _N | Input Referred Voltage Noise | A _V = +2 | | 40 | | nV/√Hz |
| V _{OS} | Input Referred Offset Voltage | Includes muxes and output amps; A, B, C, D channels | -80 | 0 | 80 | mV |
| | | S channel in auto-calibration mode | -10 | 5 | 12 | mV |
| V _{IN} | Maximum Recommended Input Range | | | | V _{SA} | V |
| C _{IN} | Input Capacitance | | | 2 | | pF |
| R _{IN} | Input Resistance, Single-ended | | 1100 | 1320 | 1550 | Ω |
| V _{INSET} | Input Biasing Voltage | | 1.49 | 1.53 | 1.57 | V |
| OVERLAY INPUT CHARACTERISTICS | | | | | | |
| V _{OS} | Input Referred Offset Voltage | S channel overlay inputs at A _V = 2 | -10 | 5 | 12 | mV |
| OVERLAY SWITCHING CHARACTERISTICS | | | | | | |
| P _{APERTURE} | Pixel Mux Aperture of Uncertainty | 5% setting for max signal charge | | 10 | | ns |
| A _V | Gain Accuracy for S Channel | S channel overlay input | | | | |
| OUTPUT CHARACTERISTICS | | | | | | |
| Output Impedance | | Enabled | | 100 | | mΩ |
| | | Disabled | | 10 | | MΩ |
| V _{OUT} | Maximum Recommended Output Range | | 0 | | 3.3 | V |
| I _{OUT} | Output Current | Short-circuit (5Ω) | | 60 | | mA |
| AC PERFORMANCE | | | | | | |
| SR | Slew Rate | 2V _{P-P} symmetrical, R _L = 150Ω, A _V = 2, guaranteed by design | | 800 | | V/μs |

EL4544

Electrical Specifications $V_{SA} = 5V$, $V_{SD} = 3.3V$, Gain = 2, $R_L = 150\Omega$, $C_L = 2.7pF$, $T_A = 25^\circ C$. (Continued)


| PARAMETER | DESCRIPTION | CONDITION | MIN | TYP | MAX | UNIT |
|---------------|---|--|-----|-----|-----|------|
| BW | -3dB Bandwidth | -3dB, 200mV _{P-P} , load of 150 Ω | | 300 | | MHz |
| | 0.1dB Bandwidth | 0.1dB, 200mV _{P-P} , load of 150 Ω | | 60 | | MHz |
| Settling Time | 1% Settling Time | 2V _O step, load of 150 Ω | | 10 | | ns |
| Crosstalk | Hostile Crosstalk Between any 2 Channels | 100MHz | | -70 | | dB |
| | Worst Case Hostile Crosstalk One Channel Affected by all Other Channels Running the Same Signal | 100MHz | | -50 | | dB |

I/O Block Diagram of Video Signals

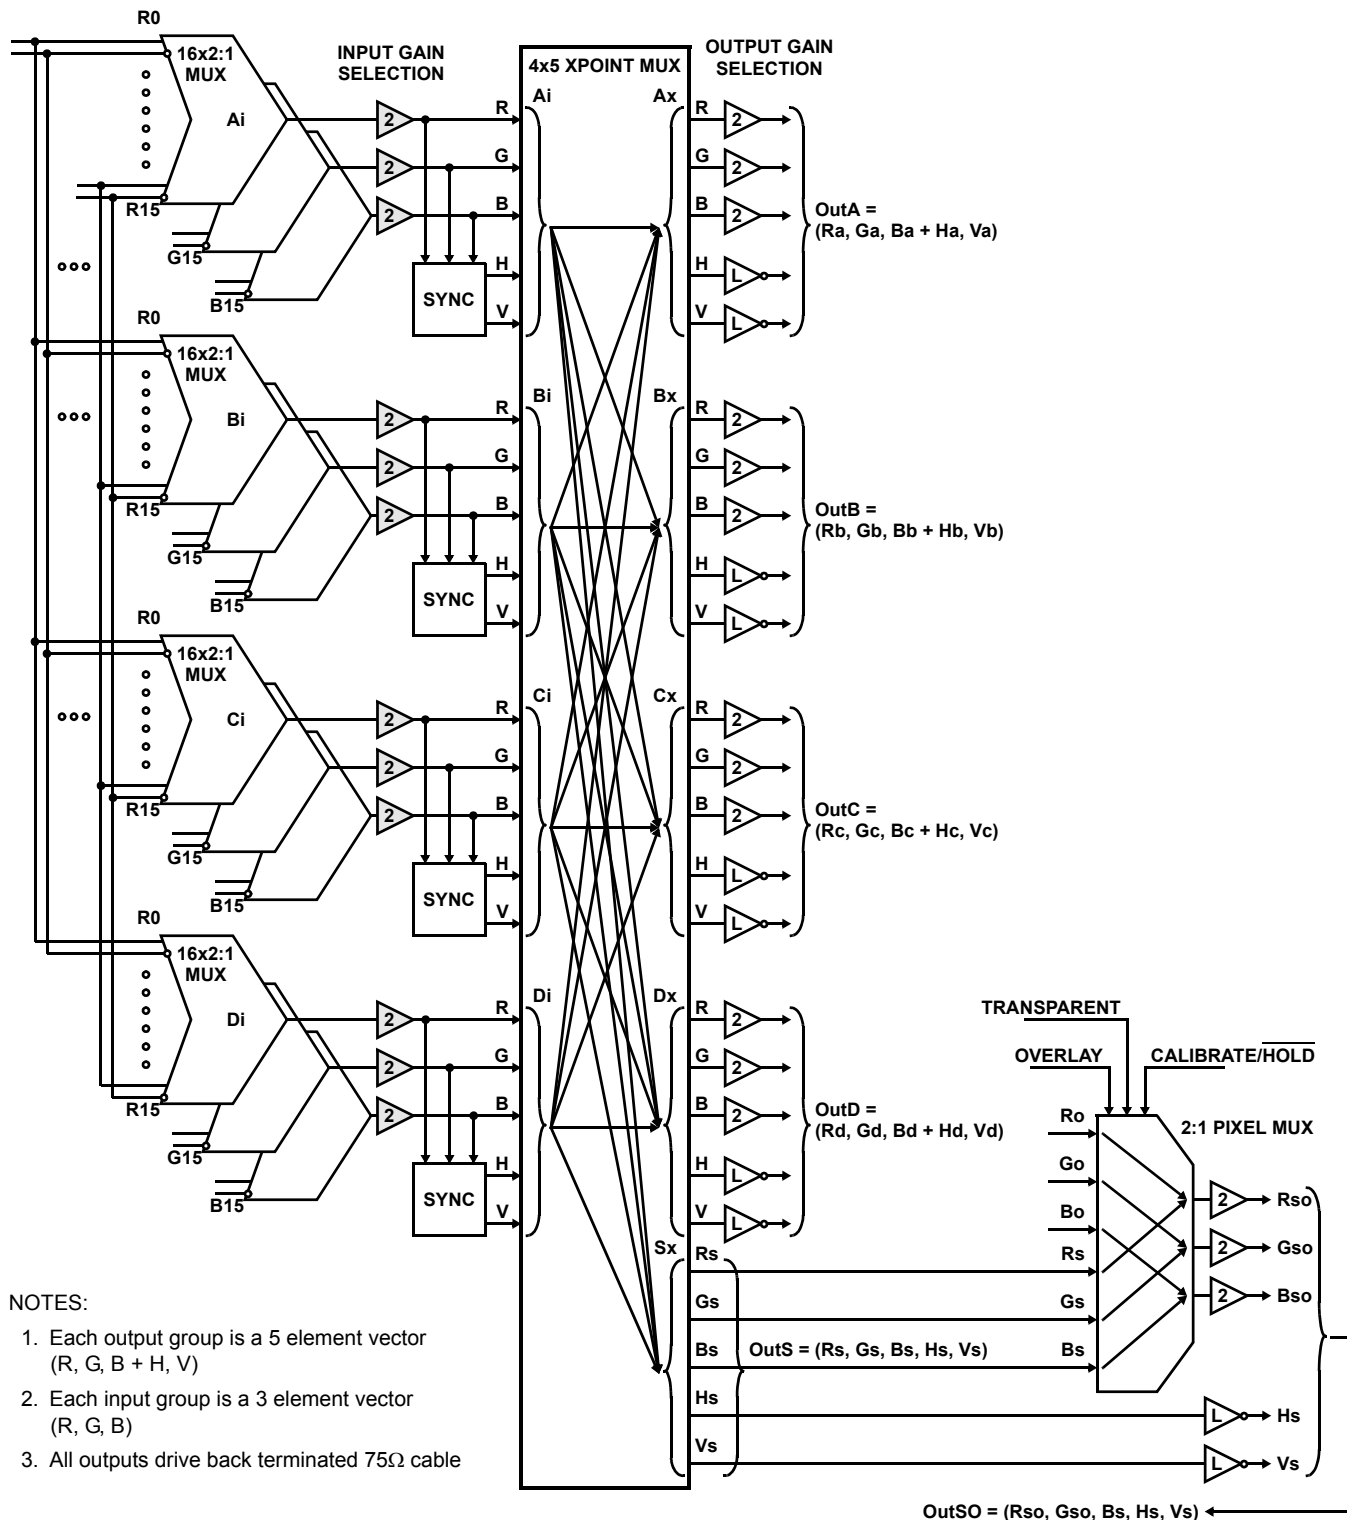


NOTES:

1. Each output group is a 5 element vector (R, G, B + H, V)
2. Each input group is a 3 element vector (R, G, B)
3. All outputs drive back terminated 75Ω cable

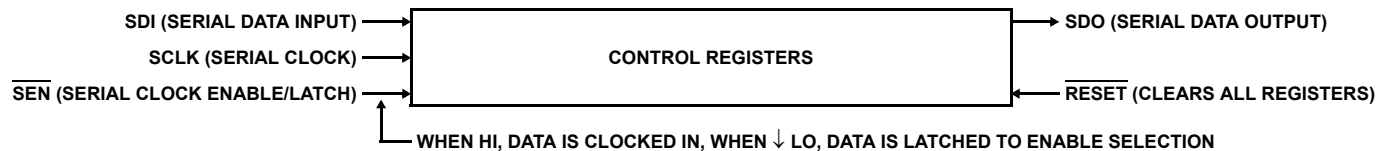


I/O Block Diagram of Video Signals with Power Supplies and References

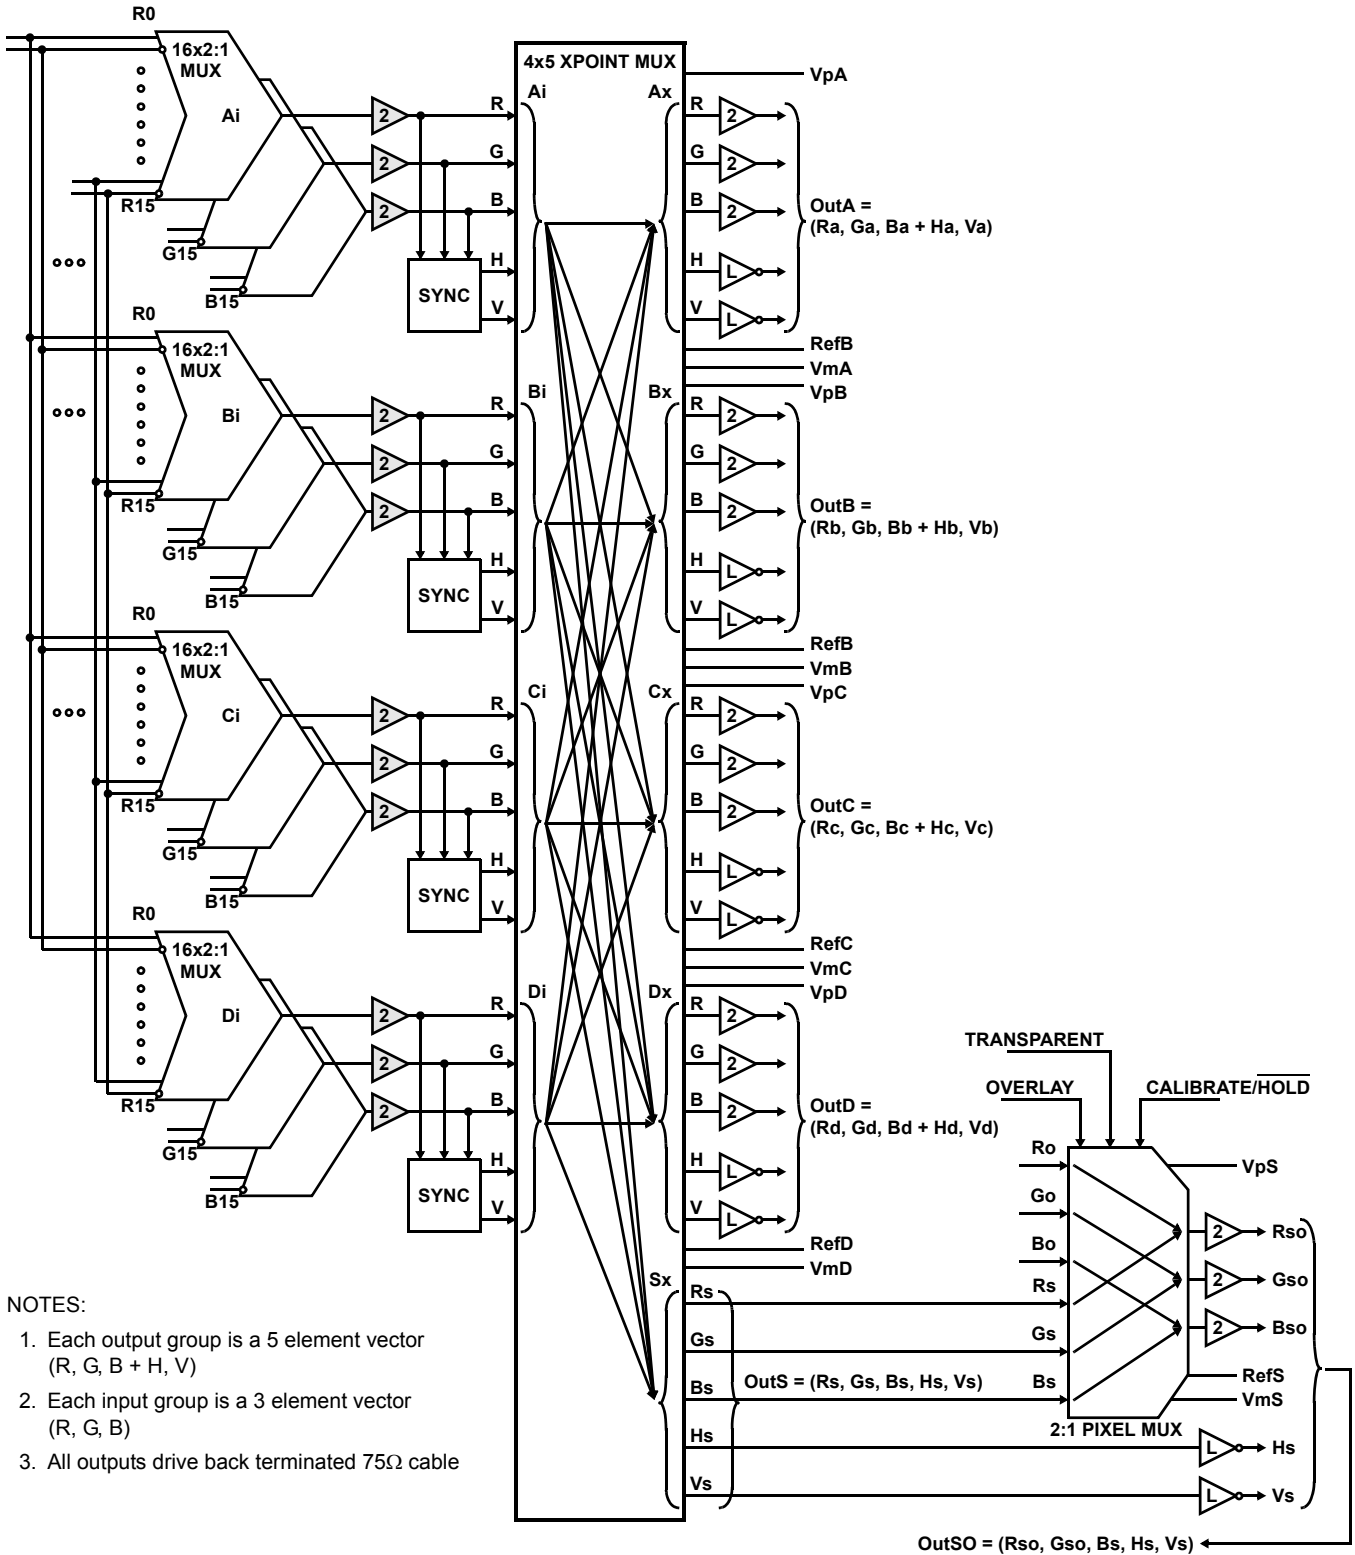


NOTES:

1. Each output group is a 5 element vector (R, G, B + H, V)
2. Each input group is a 3 element vector (R, G, B)
3. All outputs drive back terminated 75Ω cable

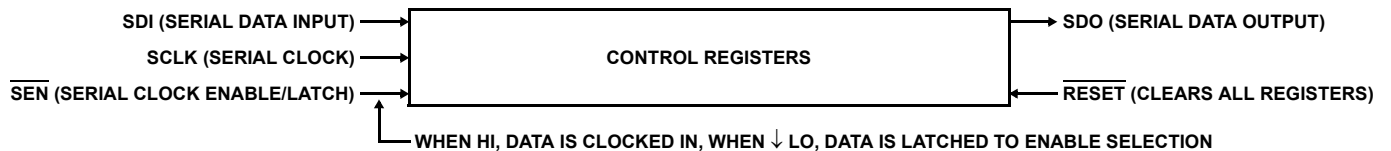


Serial Bus Interface Architecture

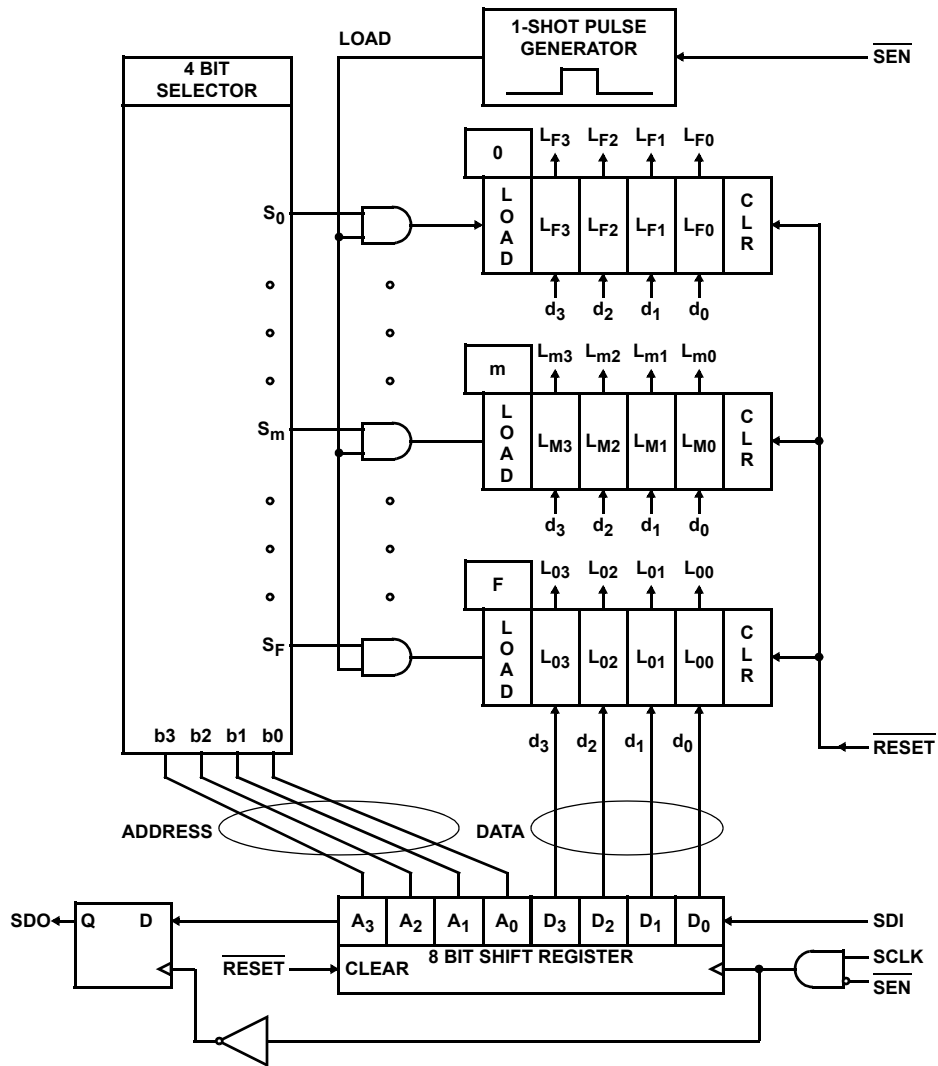

NOTE: The selector has 16 outputs, connected to 16 AND gates, connected to 16 4-bit latches. Rising edge of \overline{SEN} triggers the load one-shot.

Serial Bus Interface Timing Diagram

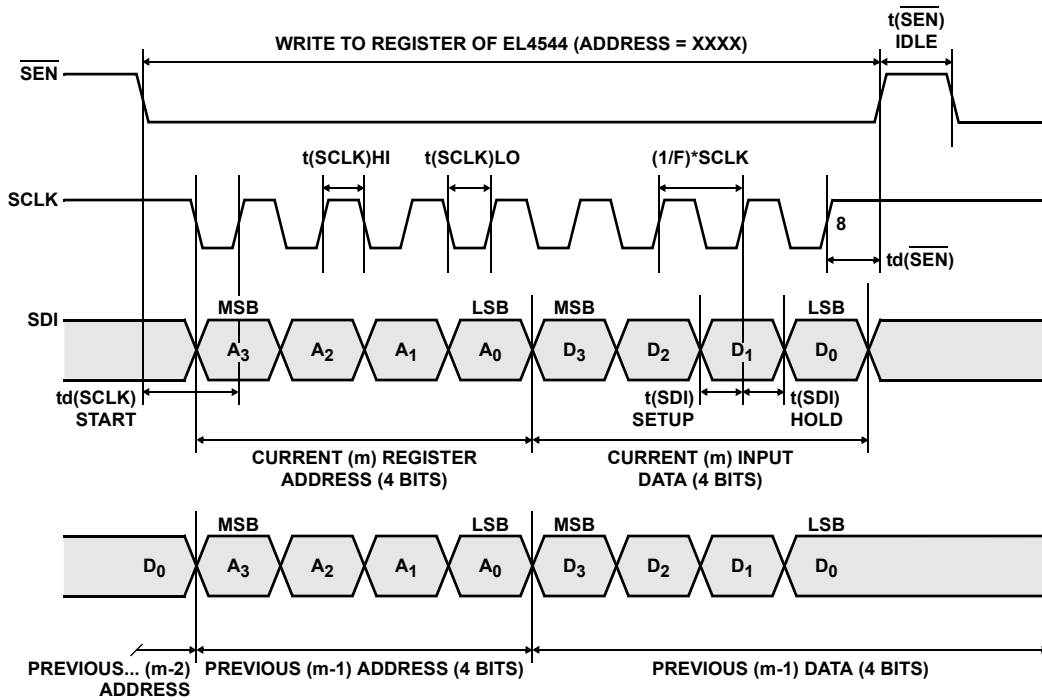

NOTE: Readback of the serial bus register can be done as follows: After \overline{SEN} is taken low, latching data, and before writing the next word, the data in the register can be read back by clocking out 8 bits before writing in the next word.

EL4544






Serial Bus Interface Control Table

| HEX ADDRESS CODE | FUNCTION | ADDRESS | | | | DATA | | | |
|------------------|--|---------|----|----|----|---------|---------------------|---------|---------|
| | | A3 | A2 | A1 | A0 | D3 | D2 | D1 | D0 |
| 0 | Ai Input Mux: Select Input of Input Mux Ai | 0 | 0 | 0 | 0 | S3 | S2 | S1 | S0 |
| 1 | Bi Input Mux: Select Input of Input Mux Bi | 0 | 0 | 0 | 1 | S3 | S2 | S1 | S0 |
| 2 | Ci Input Mux: Select Input of Input Mux Ci | 0 | 0 | 1 | 0 | S3 | S2 | S1 | S0 |
| 3 | Di Input Mux: Select Input of Input Mux Di | 0 | 0 | 1 | 1 | S3 | S2 | S1 | S0 |
| 4 | Enable Any of the 4 Input Muxes: Di/Ci/Bi/Ai | 0 | 1 | 0 | 0 | EnDi | EnCi | EnBi | EnAi |
| 5 | Ti Input Test Mux: Select Which Input Group is Connected to Input Test Mux | 0 | 1 | 0 | 1 | TiS3 | TiS2 | TiS1 | TiS0 |
| 6 | Enable Test Muxes: Input & Output | 0 | 1 | 1 | 0 | EnTi | ToS2 | ToS1 | ToS0 |
| 7 | Enable Sync Detectors for Di/Ci/Bi/Ai | 0 | 1 | 1 | 1 | EnDSync | EnCSync | EnBSync | EnASync |
| 8 | Ax Crosspoint Mux: Enable/Gain = 2or1/Select Input (2Bits) | 1 | 0 | 0 | 0 | En | $A_V=2/\text{not}1$ | S1 | S0 |
| 9 | Bx Crosspoint Mux: Enable/Gain = 2or1/Select Input (2Bits) | 1 | 0 | 0 | 1 | En | $A_V=2/\text{not}1$ | S1 | S0 |
| A | Cx Crosspoint Mux: Enable/Gain = 2or1/Select Input (2Bits) | 1 | 0 | 1 | 0 | En | $A_V=2/\text{not}1$ | S1 | S0 |
| B | Dx Crosspoint Mux: Enable/Gain = 2or1/Select Input (2Bits) | 1 | 0 | 1 | 1 | En | $A_V=2/\text{not}1$ | S1 | S0 |
| C | Sx Crosspoint Mux: Enable/Gain = 2or1/Select Input (2Bits) | 1 | 1 | 0 | 0 | En | $A_V=2/\text{not}1$ | S1 | S0 |
| D | Sync, Overlay, and Calibration Modes | 1 | 1 | 0 | 1 | X | Trans | Toggle | Autocal |
| E | Gain for: Di/Ci/Bi/Ai Set to HI for gain of 2 Set to LO for gain of 1 | 1 | 1 | 1 | 0 | AvDi=2 | AvCi=2 | AvBi=2 | AvDi=2 |
| F | No Operation | 1 | 1 | 1 | 1 | X | X | X | X |

| | | | | | | | | |
|-----------------------|---|---|---|---|---|---|---|---|
| Order bits are loaded | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
|-----------------------|---|---|---|---|---|---|---|---|



EL4544

Pin Descriptions
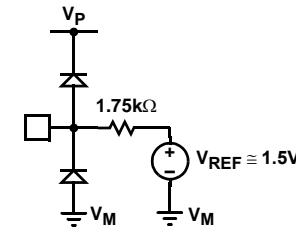
| 356-PIN BGA | PIN NAME | FUNCTION | CIRCUIT |
|-------------|----------|---|---|
| | | All input pins for 16 x R, G, B differential inputs |  <p style="text-align: center;">CIRCUIT 1</p> |
| | | Analog outputs |  <p style="text-align: center;">CIRCUIT 2</p> |
| | | RAZ, BAZ, GAZ outputs |  <p style="text-align: center;">CIRCUIT 3</p> |
| | | Digital inputs |  <p style="text-align: center;">CIRCUIT 4</p> |
| | | Digital outputs |  <p style="text-align: center;">CIRCUIT 5</p> |

EL4544

Pin Descriptions (Continued)

| 356-PIN BGA | PIN NAME | FUNCTION | CIRCUIT |
|-------------|----------|---|--|
| | | Extra inputs TMon1, TMon2 VpA, VpB, VpC, VpD, VpS VmA, VmB, VmC, VmD, VmS RefS: Reference input for output channels RefOL: Reference for overlay Inputs |  <p style="text-align: center;">CIRCUIT 6</p> |
| | | RefA, RefB, RefC, RefD: Reference inputs for output channels A, B, C, D and for overlay inputs RoL, GoL, BoL |  <p style="text-align: center;">CIRCUIT 7</p> |

Functional Overview

Overall Functionality

The EL4544 is a video crosspoint switch that has 16 (RGB differential) input channels (with H & V sync embedded in their common-modes) which connect via an internal crosspoint mux to 5 (RGB + HV) single-ended output channels. The 5th output group has enhanced features that include: a pixel-by-pixel overlay mux and auto-calibrated offset cancellation. All analog and digital outputs have a high-impedance state, allowing several EL4544 to share the same output connections.

16 RGB Differential Video Inputs with Encoded Sync

For each of the 16 RGB groups of differential video inputs, horizontal and vertical sync are encoded as a combination of the common modes for each RGB group. Each of these differential input pins has a single-ended signal range that spans the entire 0V to 5V supply range. The embedded sync signals are provided by the EL4543 Triple Differential Twisted Pair Driver IC.

Overall Analog Signal Flow

There are four independent internal input multiplexors represented as **Ai**, **Bi**, **Ci**, and **Di** in the block diagram and serial bus interface control table (hexa-decimal addresses 0h, 1h, 2h, 3h). These muxes convert the selected RGB differential input signal to single-ended RGB and extract H & V sync. The five output crosspoint multiplexors represented as **Ax**, **Bx**, **Cx**, **Dx**, and **Sx**, can independently select from the four internal (RGBHV) signal groups **Ai**, **Bi**, **Ci**, and **Di** by programming the hexadecimal serial bus addresses 8h, 9h, Ah, Bh, and Ch. There are five RGBHV single-ended output

signal groups labelled A, B, C, D, and S which buffer signals from the corresponding crosspoint outputs **Ax**, **Bx**, **Cx**, **Dx**, and **Sx**. Each of these output groups has an independent reference pin (**RefA**, **RefB**, **RefC**, **RefD**, and **RefS**) that allows the user to program the reference level that corresponds to a zero voltage differential input.

Analog and Digital Video Outputs

All analog outputs (A, B, C, D, and S) have a signal range from 0V to 3.5V and are capable of driving the 150Ω load presented by a terminated video cable. The H & V sync outputs and all other digital I/O are compatible with 3V operation; their signal swings are determined by connecting the digital supply pin **Vdp** to a 3V source.

How to Configure the Analog Video Outputs to Swing to 0V

The RGB analog outputs of the A, B, C, D, and S output groups are all capable of a range of swing that reaches the negative supply pin **Vm** = 0V. However, since the EL4544 has no internal supply connections, its single-ended outputs run out of bandwidth, slew rate, and linearity below 0.5V. If accurate wide band performance below 0.5V is required, add external pulldown resistors between each analog output and an external -5V supply.

This will keep the output stage biased. Values between 3kΩ to 1kΩ are suggested. The lower the selected resistance, the wider the bandwidth will be at 0V, but lower external resistance will increase overall IC power dissipation significantly since these resistors are loading their respective output stages.

Operating the S Output Group Near Ground

The S output group has one additional consideration to cover configurations where the output signals and the output reference pin **RefS** are operated below 0.5V. Under these circumstances, each of the three auto-zero monitoring pins **RAZ**, **GAZ**, and **BAZ**, require an external 10kΩ resistor connecting each to an external -5V supply. This keeps the auto-zero circuitry active all the way down to ground.

Switchable Video Output Group Has Overlay Capability and Offset Cancellation

The S group of output signals have an overlay switch that allows single-ended inputs **RoL**, **GoL**, and **BoL**, to be inserted on a pixel-by-pixel basis. The pin **ReFoL** allows the user to program the overlay input (reference) level that produces an output voltage equal to the output reference pin **RefS**. The S group of video outputs has an Auto-Calibration mode which can null out offsets through the entire selected signal path from its inputs to its outputs. (It is usually triggered during the front or back porch of video when the input signal is known to be at Black Level.)

Transparent vs Opaque Overlays

The overlay input for the S group is directly selected by the Overlay control pin **Ovl**. Two types of overlay are possible. The simplest overlay alternates between the dedicated overlay input and the "thru" input (that has been selected by the cross-point multiplexor). The "transparent" overlay mode is different from the standard overlay mode in that it presents the average of the overlay input and the "thru" input signal during overlay. The transparent mode is selected either by driving the Trans pin low or by programming bit D2 in Register D of the Serial Interface to a logical "1".

Serial Interface Control of the Auto-Calibration Feature

Programming bit D0 in Register D of the Serial Interface to a logical "1" activates the "Auto-Calibration" Mode which allows offsets from all inputs to the S group to be nulled-out via a calibration sequence. The programming Bit D1 in Register D of the Serial Interface is called **Toggle**. It allows for two modes of auto-calibration. If Toggle is programmed to a logical "0", Toggle mode is inactive. The auto-calibration cycle must be executed separately for both input groups (the overlay and the through signal groups).

What Happens During an Auto-Calibration Cycle

The auto-calibration (auto-zero) feature only applies to the S group of outputs. An auto-calibration cycle works as follows for either the overlay input or a selected "thru" input from the cross-point: During any time when the input signal is known to be at a "zero-level" ("zero-level" is a differential-zero input signal for any of the 16-RGB differential inputs or when the pin voltages to the overlay inputs **RoL** = **GoL** = **BoL** are all equal to **ReFoL**), setting the calibration pin **Cal** to a logical "LO" activates the sample phase of auto-calibration and forces the analog outputs to be equal to the reference

voltage of pin **RefS**. When pin **Cal** is brought back to a logical "HI", the calibration is held until the next calibration cycle, and the S group will accurately convey the video signal with low offsets. A small hold-step (≤ 1 mV) can be observed whenever the calibration signal is released. Each subsequent activation of the sampling phase refreshes the calibration. If Toggle mode is inactive, the user must individually calibrate both the overlay and non-overlay ("thru") output states by selecting the between them and running calibration separately for both of the input conditions. Changing the input selections by re-programming the crosspoint to another input path or by changing the overlay mode (transparent/opaque), requires refreshing of this calibration. Ideally, the calibration is refreshed once per line of video. The drift during a line of video is negligible. (On the lab bench, using manual control, a drift rate on the order of 0.2mV/sec will be observed.)

Toggle Mode Automatically Supervises the Calibration Cycles

The purpose of Toggle mode is to automatically alternate between calibrating the overlay and calibrating the "thru" paths to the S Output group. The Toggle mode assumes that overlays never exist outside of the video screen (that overlay only occurs during active video). When using the Toggle mode, the overlay function must be inactive during and around sync. When Toggle mode is active and the overlay switch is disabled, the EL4544 will automatically toggle between "thru" and overlay selections for alternate pulsing of the calibrate signal. Thus, every alternate calibrate pulse will override the selected "thru" state of the overlay switch, perform an auto-zero function, and then return the overlay switch back to its original "thru" position. This is true if the programming Bit D1 in Register D (labelled **Toggle**) of the Serial Interface is programmed to a logical "1". Whenever the IC is reset by momentarily pulling the Reset pin "LO", the Toggle mode is initialized such that the first path calibrated is the overlay path. The next calibration cycle will automatically calibrate the "thru" path.

Incorrect Use of the Toggle Mode

If the overlay is selected during auto-calibration with the Toggle mode active, the "thru" path will never be calibrated. Only the overlay gets calibrated in this configuration.

Integrated Die Temperature Probes

Thermal monitoring pins **TMon1** and **TMon2** allow the user to effectively monitor the die temperature by lightly forward biasing internal diodes and measuring their forward voltage drop. Since these diodes will have a -2 mV/°C tempco, they can be an effective means of evaluating the thermal management of the user's application board and may even be configured to provide a thermally-triggered shutdown. To implement this feature, pull either of these pins below the negative supply with precision current source of 10μA to 100μA. Measure the forward drop at room temperature with

EL4544

the chip disabled. During operation, every 1°C rise in temperature will produce a 2mV drop in the forward voltage.

Some Tips on the Most Effective Programming of the EL4544

The video inputs present a 1.75kΩ single ended and a 3.5kΩ differential load to an incoming video signal. Since this load is in parallel with the external termination network, it has a consistent effect on the system gain. To maintain this consistency, it is inadvisable to program more than one input stage (**Ai**, **Bi**, **Ci**, or **Di**) to "look" at any given video input (RGB0, RGB1, ..., RGBF) since each activated input stage puts an additional parallel load of 3.5kΩ onto the selected input. When programming the serial interface this is simply expressed as: Avoid programming the same value into the four data registers (for **Ai**, **Bi**, **Ci**, & **Di**) at hex addresses 0H, 1H, 2H, & 3H. They should all have unique values. This is important since if any inputs are selected more than once, their gains will mismatch an input that has only been selected once.

If one wishes to broadcast the same signal to multiple output channels, this can easily be accomplished without violating the advice of the previous paragraph. Select the input that needs to be broadcast using any one of the four input selectors (**Ai**, **Bi**, **Ci**, or **Di**), then have any of up to five of the output stages (**Ax**, **Bx**, **Cx**, **Dx**, **Sx**) point to the input stage that is pointing to the desired input signal. These are selected using hex 8H, 9H, AH, BH, & CH. Now the EL4544 is broadcasting a single video source to multiple outputs without excessively loading down the selected input.

Sync Decoding of EL4544

The EL4544 is designed to receive and decode Horizontal and Vertical Sync signals that have been encoded as common-mode signals of the Red, Green, and Blue Video

inputs. The EL4543 provides this encoding as shown in Table 1.

TABLE 1. SYNC SIGNAL ENCODING

| H | V | COMMON MODE A (RED) | COMMON MODE B (GREEN) | COMMON MODE C (BLUE) |
|------|------|---------------------|-----------------------|----------------------|
| Low | High | 3.0 | 2.0 | 2.5 |
| Low | Low | 2.5 | 3.0 | 2.0 |
| High | Low | 2.0 | 3.0 | 2.5 |
| High | High | 2.5 | 2.0 | 3.0 |

The EL4544 decodes the common-mode signals into H & V syncs as follows: Horizontal Sync is TRUE when the Blue_Common_Mode voltage is greater than the Average_of_Red_and_Green_Common_Mode voltage. Vertical Sync is TRUE when the Average_of_Red_and_Blue_Common_Mode voltage is greater than the Green_Common_Mode voltage. The sync comparators have an internal symmetrical hysteresis that is less than ±50mV. Timing skews between comparators under all conditions are less than one pixel. The comparators have an input common mode that allows for operation at least 1V from the negative supplies and at least 1.5V from the positive supplies.

Logic Levels for Serial Interface and Control Logic

TABLE 2. INPUT LOGIC THRESHOLD (+5V SUPPLY)

| | |
|---------------|------|
| $V_{LO, max}$ | 0.8V |
| $V_{HI, min}$ | 2V |

Pin Descriptions

| PIN NAME | SOLDER BALL | DESCRIPTION | EQUIVALENT CIRCUIT |
|----------|-------------|-------------------|---------------------|
| Rp0 | A3 | Red plus input 0 | Reference Circuit 1 |
| Rn0 | B3 | Red minus input 0 | Reference Circuit 1 |
| Rp1 | A4 | Red plus input 1 | Reference Circuit 1 |
| Rn1 | B4 | Red minus input 1 | Reference Circuit 1 |
| Rp2 | A5 | Red plus input 2 | Reference Circuit 1 |
| Rn2 | B5 | Red minus input 2 | Reference Circuit 1 |
| Rp3 | A6 | Red plus input 3 | Reference Circuit 1 |
| Rn3 | B6 | Red minus input 3 | Reference Circuit 1 |
| Rp4 | A7 | Red plus input 4 | Reference Circuit 1 |
| Rn4 | B7 | Red minus input 4 | Reference Circuit 1 |
| Rp5 | A8 | Red plus input 5 | Reference Circuit 1 |
| Rn5 | B8 | Red minus input 5 | Reference Circuit 1 |
| Rp6 | A9 | Red plus input 6 | Reference Circuit 1 |

EL4544

Pin Descriptions (Continued)

| PIN NAME | SOLDER BALL | DESCRIPTION | EQUIVALENT CIRCUIT |
|----------|---------------|---|---------------------|
| Rn6 | B9 | Red minus input 6 | Reference Circuit 1 |
| Rp7 | A10 | Red plus input 7 | Reference Circuit 1 |
| Rn7 | B10 | Red minus input 7 | |
| Vm | MultipleBalls | Analog minus supply | |
| Vp | C11 | Analog plus supply | Reference Circuit 1 |
| Rp8 | A11 | Red plus input 8 | Reference Circuit 1 |
| Rn8 | B11 | Red minus input 8 | Reference Circuit 1 |
| Rp9 | A12 | Red plus input 9 | Reference Circuit 1 |
| Rn9 | B12 | Red minus input 9 | Reference Circuit 1 |
| RpA | A13 | Red plus input 10 | Reference Circuit 1 |
| RnA | B13 | Red minus input 10 | Reference Circuit 1 |
| RpB | A14 | Red plus input 11 | Reference Circuit 1 |
| RnB | B14 | Red minus input 11 | Reference Circuit 1 |
| RpC | A15 | Red plus input 12 | Reference Circuit 1 |
| RnC | B15 | Red minus input 12 | Reference Circuit 1 |
| RpD | A16 | Red plus input 13 | Reference Circuit 1 |
| RnD | B16 | Red minus input 13 | Reference Circuit 1 |
| RpE | A17 | Red plus input 14 | Reference Circuit 1 |
| RnE | B17 | Red minus input 14 | Reference Circuit 1 |
| RpF | A18 | Red plus input 15 | Reference Circuit 1 |
| RnF | B18 | Red minus input 15 | Reference Circuit 1 |
| TMon1 | C18 | Thermal Monitor 1 has diodes to measure die temperature | Reference Circuit 6 |
| Vp | A20 | Analog plus supply | |
| Vm | MultipleBalls | Analog minus supply | |
| BnF | C19 | Blue minus input 15 | Reference Circuit 1 |
| BpF | C20 | Blue plus input 15 | Reference Circuit 1 |
| BnE | D19 | Blue minus input 14 | Reference Circuit 1 |
| BpE | D20 | Blue plus input 14 | Reference Circuit 1 |
| BnD | E19 | Blue minus input 13 | Reference Circuit 1 |
| BpD | E20 | Blue plus input 13 | Reference Circuit 1 |
| BnC | F19 | Blue minus input 12 | Reference Circuit 1 |
| BpC | F20 | Blue plus input 12 | Reference Circuit 1 |
| BnB | G19 | Blue minus input 11 | Reference Circuit 1 |
| BpB | G20 | Blue plus input 11 | Reference Circuit 1 |
| BnA | H19 | Blue minus input 10 | Reference Circuit 1 |
| BpA | H20 | Blue plus input 10 | Reference Circuit 1 |
| Bn9 | J19 | Blue minus input 9 | Reference Circuit 1 |
| Bp9 | J20 | Blue plus input 9 | Reference Circuit 1 |
| Bn8 | K19 | Blue minus input 8 | Reference Circuit 1 |
| Bp8 | K20 | Blue plus input 8 | Reference Circuit 1 |

EL4544

Pin Descriptions (Continued)

| PIN NAME | SOLDER BALL | DESCRIPTION | EQUIVALENT CIRCUIT |
|----------|---------------|---|---------------------|
| Vp | K18 | Analog plus supply | |
| Vm | MultipleBalls | Analog minus supply | |
| Bn7 | L19 | Blue minus input 7 | Reference Circuit 1 |
| Bp7 | L20 | Blue plus input 7 | Reference Circuit 1 |
| Bn6 | M19 | Blue minus input 6 | Reference Circuit 1 |
| Bp6 | M20 | Blue plus input 6 | Reference Circuit 1 |
| Bn5 | N19 | Blue minus input 5 | Reference Circuit 1 |
| Bp5 | N20 | Blue plus input 5 | Reference Circuit 1 |
| Bn4 | P19 | Blue minus input 4 | Reference Circuit 1 |
| Bp4 | P20 | Blue plus input 4 | Reference Circuit 1 |
| Bn3 | R19 | Blue minus input 3 | Reference Circuit 1 |
| Bp3 | R20 | Blue plus input 3 | Reference Circuit 1 |
| Bn2 | T19 | Blue minus input 2 | Reference Circuit 1 |
| Bp2 | T20 | Blue plus input 2 | Reference Circuit 1 |
| Bn1 | U19 | Blue minus input 1 | Reference Circuit 1 |
| Bp1 | U20 | Blue plus input 1 | Reference Circuit 1 |
| Bn0 | V19 | Blue minus input 0 | Reference Circuit 1 |
| Bp0 | V20 | Blue plus input 0 | Reference Circuit 1 |
| Vm | Vm | Analog minus supply | |
| Vp | Y20 | Analog plus supply | |
| TMon2 | V18 | Thermal Monitor 2 has diodes to measure die temperature | Reference Circuit 6 |
| GnF | W18 | Green minus input 15 | Reference Circuit 1 |
| GpF | Y18 | Green plus input 15 | Reference Circuit 1 |
| GnE | W17 | Green minus input 14 | Reference Circuit 1 |
| GpE | Y17 | Green plus input 14 | Reference Circuit 1 |
| GnD | W16 | Green minus input 13 | Reference Circuit 1 |
| GpD | Y16 | Green plus input 13 | Reference Circuit 1 |
| GnC | W15 | Green minus input 12 | Reference Circuit 1 |
| GpC | Y15 | Green plus input 12 | Reference Circuit 1 |
| GnB | W14 | Green minus input 11 | Reference Circuit 1 |
| GpB | Y14 | Green plus input 11 | Reference Circuit 1 |
| GnA | W13 | Green minus input 10 | Reference Circuit 1 |
| GpA | Y13 | Green plus input 10 | Reference Circuit 1 |
| Gn9 | W12 | Green minus input 9 | Reference Circuit 1 |
| Gp9 | Y12 | Green plus input 9 | Reference Circuit 1 |
| Gn8 | W11 | Green minus input 8 | Reference Circuit 1 |
| Gp8 | Y11 | Green plus input 8 | Reference Circuit 1 |
| Vp | V11 | Analog plus supply | |
| Vm | MultipleBalls | Analog minus supply | |
| Gn7 | W10 | Green minus input 7 | Reference Circuit 1 |

EL4544

Pin Descriptions (Continued)

| PIN NAME | SOLDER BALL | DESCRIPTION | EQUIVALENT CIRCUIT |
|---------------------------|---------------|---|---------------------|
| Gp7 | Y10 | Green plus input 7 | Reference Circuit 1 |
| Gn6 | W9 | Green minus input 6 | Reference Circuit 1 |
| Gp6 | Y9 | Green plus input 6 | Reference Circuit 1 |
| Gn5 | W8 | Green minus input 5 | Reference Circuit 1 |
| Gp5 | Y8 | Green plus input 5 | Reference Circuit 1 |
| Gn4 | W7 | Green minus input 4 | Reference Circuit 1 |
| Gp4 | Y7 | Green plus input 4 | Reference Circuit 1 |
| Gn3 | W6 | Green minus input 3 | Reference Circuit 1 |
| Gp3 | Y6 | Green plus input 3 | Reference Circuit 1 |
| Gn2 | W5 | Green minus input 2 | Reference Circuit 1 |
| Gp2 | Y5 | Green plus input 2 | Reference Circuit 1 |
| Gn1 | W4 | Green minus input 1 | Reference Circuit 1 |
| Gp1 | Y4 | Green plus input 1 | Reference Circuit 1 |
| Gn0 | W3 | Green minus input 0 | Reference Circuit 1 |
| Gp0 | Y3 | Green plus input 0 | Reference Circuit 1 |
| Vm | Vm | Analog minus supply | |
| Vp | V3 | Analog plus supply | |
| $\overline{\text{Chip}}$ | V5 | Chip enable (active low): when "HI" disables all analog except references; all analog or digital video outputs are in a high impedance state; all registers hold their data but remain programmable since the serial interface is left active | Reference Circuit 4 |
| Vdp | U5 | Digital logic power supply: nominally at 3V | |
| $\overline{\text{Reset}}$ | V4 | Reset (active low): clears all registers in interface and calibration sections; this causes the chip to standby with all outputs in a high impedance state | Reference Circuit 4 |
| $\overline{\text{sEn}}$ | U4 | Serial bus enable (active low): enables the serial bus when "LO"; latches the current value when transitioning to "HI" | Reference Circuit 4 |
| Vp | V3 | Analog plus supply | |
| Vm | MultipleBalls | Analog minus supply | |
| sClk | U3 | Serial bus clock | Reference Circuit 4 |
| sDo | T4 | Serial bus data output | Reference Circuit 4 |
| sDi | T3 | Serial bus data input | Reference Circuit 5 |
| RefA | Y1 | Output stage reference level (input) A | Reference Circuit 6 |
| VmA | Y2 | RGB video output stages' minus supply A | Reference Circuit 7 |
| Ba | W1 | Blue output A | Reference Circuit 2 |
| Va | W2 | Vertical sync output A | Reference Circuit 5 |
| Ga | V1 | Green output A | Reference Circuit 2 |
| Ha | V2 | Horizontal sync output A | Reference Circuit 5 |
| Ra | U1 | Red output A | Reference Circuit 2 |
| VpA | U2 | RGB video output stages' plus supply A | Reference Circuit 7 |
| RefB | T1 | Output stage reference level (input) B | Reference Circuit 6 |
| VmB | T2 | RGB video output stages' minus supply B | Reference Circuit 7 |

EL4544

Pin Descriptions (Continued)

| PIN NAME | SOLDER BALL | DESCRIPTION | EQUIVALENT CIRCUIT |
|----------|---------------|---|---------------------|
| Bb | R1 | Blue output B | Reference Circuit 2 |
| Vb | R2 | Vertical sync output B | Reference Circuit 5 |
| Gb | P1 | Green output B | Reference Circuit 2 |
| Hb | P2 | Horizontal sync output B | Reference Circuit 5 |
| Rb | N1 | Red output B | Reference Circuit 2 |
| VpB | N2 | RGB video output stages' plus supply B | Reference Circuit 7 |
| RefC | M1 | Output stage reference level (input) C | Reference Circuit 6 |
| VmC | M2 | RGB video output stages' minus supply C | Reference Circuit 7 |
| Bc | L1 | Blue output C | Reference Circuit 2 |
| Vc | L2 | Vertical sync output C | Reference Circuit 5 |
| Gc | K1 | Green output C | Reference Circuit 2 |
| Hc | K2 | Horizontal sync output C | Reference Circuit 5 |
| Rc | J1 | Red output C | Reference Circuit 2 |
| VpC | J2 | RGB video output stages' plus supply C | Reference Circuit 7 |
| RefD | H1 | Output stage reference level (input) D | Reference Circuit 6 |
| VmD | H2 | RGB video output stages' minus supply D | Reference Circuit 7 |
| Bd | G1 | Blue output D | Reference Circuit 2 |
| Vd | G2 | Vertical sync output D | Reference Circuit 5 |
| Gd | F1 | Green output D | Reference Circuit 2 |
| Hd | F2 | Horizontal sync output D | Reference Circuit 5 |
| Rd | E1 | Red output D | Reference Circuit 2 |
| VpD | E2 | RGB video output stages' plus supply D | Reference Circuit 7 |
| RefS | D1 | Output stage reference level (input) S | Reference Circuit 6 |
| VmS | D2 | RGB video output stages' minus supply S | Reference Circuit 7 |
| Bs | C1 | Blue output S | Reference Circuit 2 |
| Vs | C2 | Vertical sync output S | Reference Circuit 5 |
| Gs | B1 | Green output S | Reference Circuit 2 |
| Hs | B2 | Horizontal sync output S | Reference Circuit 5 |
| Rs | A1 | Red output S | Reference Circuit 2 |
| VpS | A2 | RGB video output stages' plus supply S | Reference Circuit 7 |
| BoL | E3 | Blue overlay input for output group S | Reference Circuit 6 |
| GoL | E4 | Green overlay input for output group S | Reference Circuit 6 |
| RoL | D4 | Red overlay input for output group S | Reference Circuit 6 |
| RefOL | D5 | Overlay inputs' reference level for output group S | Reference Circuit 6 |
| Vm | MultipleBalls | Analog minus supply | |
| BAZ | F4 | Blue auto-zero internal calibration level monitor for output group S | Reference Circuit 3 |
| GAZ | D6 | Green auto-zero internal calibration level monitor for output group S | Reference Circuit 3 |
| Vp | C3 | Analog plus supply | |
| RAZ | C6 | Red auto zero internal calibration level monitor for output group S | Reference Circuit 3 |
| Vdp | U5 | Digital logic power supply: nominally at 3V | |

EL4544

Pin Descriptions (Continued)

| PIN NAME | SOLDER BALL | DESCRIPTION | EQUIVALENT CIRCUIT |
|---------------------------|---|--|---------------------|
| $\overline{\text{Ovl}}$ | D3 | Digital input to select whether overlay is active for output group S | Reference Circuit 4 |
| Cal | C4 | Digital input to calibrate S output group | Reference Circuit 4 |
| $\overline{\text{Trans}}$ | C5 | Digital input to select a transparent overlay for output group S | Reference Circuit 4 |
| Vp | C3 | Analog plus supply | |
| Vm | MultipleBalls | Analog minus supply | |
| Vm | A19 | Analog minus supply | |
| Vm | B19, B20, C7, C8, C9, C10, C12, C13, C14, C15, C16, C17, D7, D8, D9, D10, D11, D12, D13, D14, D15, D16, D17, D18, E17, E18, F3, F6, F7, F8, F9, F10, F11, F12, F13, F14, F15, F17, F18, G3, G4, G6, G7, G8, G9, G10, G11, G12, G13, G14, G15, G17, G18, H3, H4, H6, H7, H8, H9, H10, H11, H12, H13, H14, H15, H17, H18, J3, J4, J6, J7, J8, J9, J10, J11, J12, J13, J14, J15, J17, J18, K3, K4, K6, K7, K8, K9, K10, K11, K12, K13, K14, K15, K17, L3, L4, L6, L7, L8, L9, L10, L11, L12, L13, L14, L15, L17, L18, M3, M4, M6, M7, M8, M9, M10, M11, M12, M13, M14, M15, M17, M18, N3, N4, N6, N7, N8, N9, N10, N11, N12, N13, N14, N15, N17, N18, P3, P4, P6, P7, P8, P9, P10, P11, P12, P13, P14, P15, P17, P18, R3, R4, R6, R7, R8, R9, R10, R11, R12, R13, R15, R17, R18, T17, T18, U7, U8, U9, U10, U11, U12, U13, U14, U15, U16, U17, U18, V7, V8, V9, V10, V12, V13, V14, V15, V16, V17, W19, W20, Y19 | | |
| N/C | U6, V6 | Not connected; may be grounded | |

Typical Performance Curves

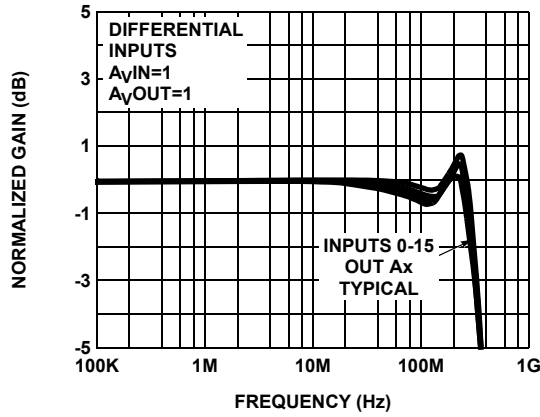


FIGURE 1. GAIN vs FREQUENCY FOR VARIOUS INPUT CHANNELS

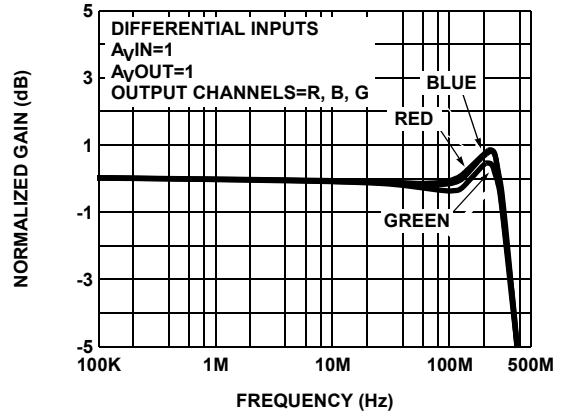


FIGURE 2. GAIN vs FREQUENCY FOR VARIOUS OUTPUT COLOR CHANNELS

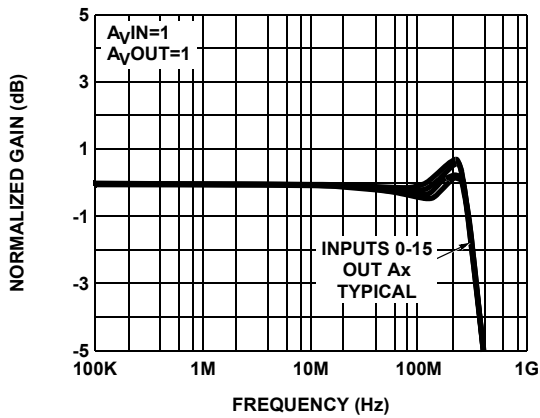


FIGURE 3. GAIN vs FREQUENCY FOR VARIOUS NON INVERTING INPUTS

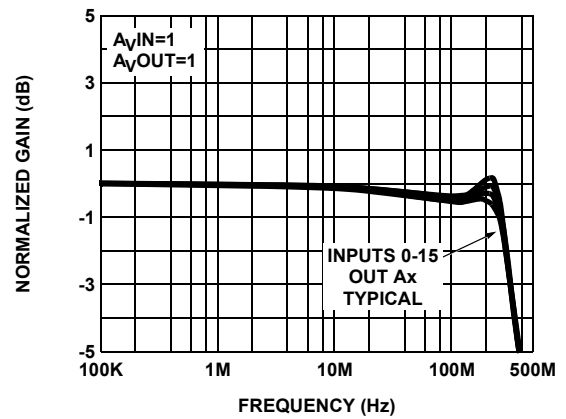


FIGURE 4. GAIN vs FREQUENCY FOR VARIOUS INVERTING INPUTS

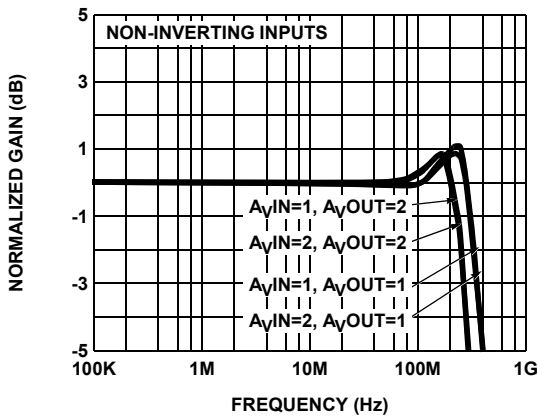


FIGURE 5. GAIN vs FREQUENCY FOR VARIOUS GAINS

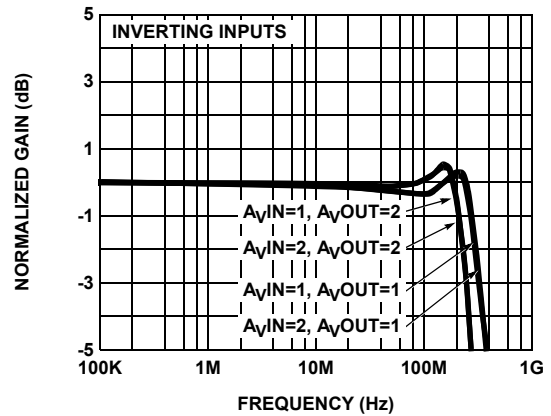


FIGURE 6. GAIN vs FREQUENCY FOR VARIOUS GAINS

Typical Performance Curves (Continued)

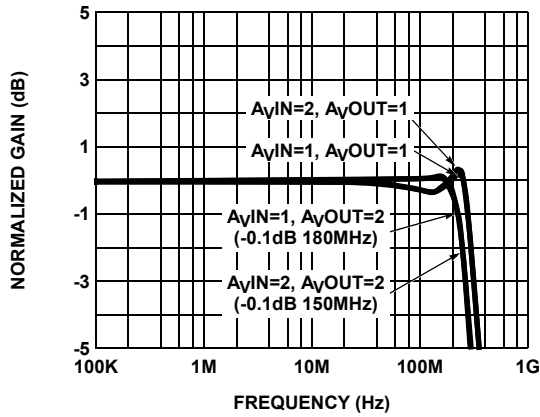


FIGURE 7. GAIN vs FREQUENCY FOR VARIOUS GAIN COMBINATIONS

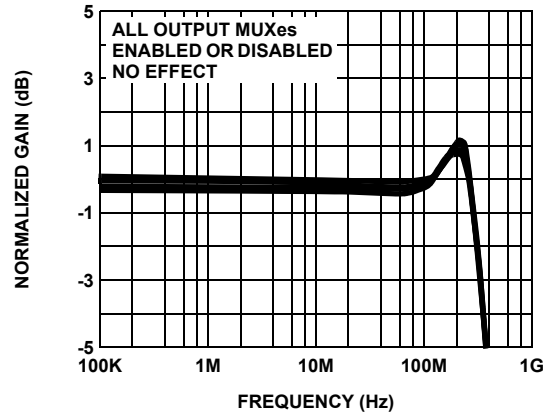


FIGURE 8. GAIN vs FREQUENCY FOR VARIOUS INPUT MUX LOADING

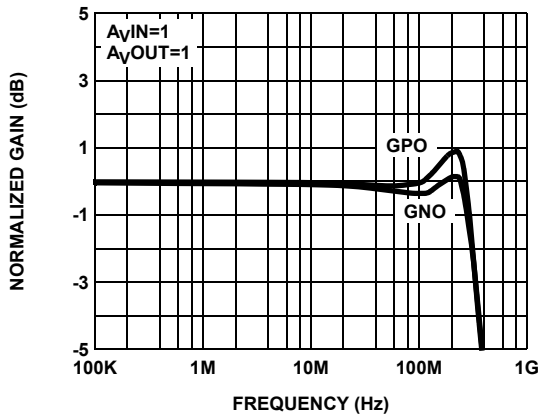


FIGURE 9. GAIN vs FREQUENCY DIFFERENTIAL INPUT COMPARISON

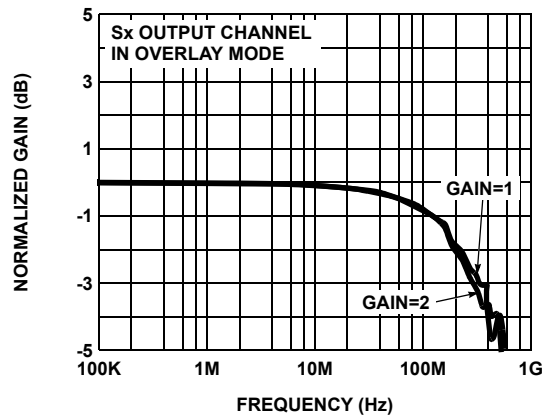


FIGURE 10. GAIN vs FREQUENCY FOR VARIOUS GAINS

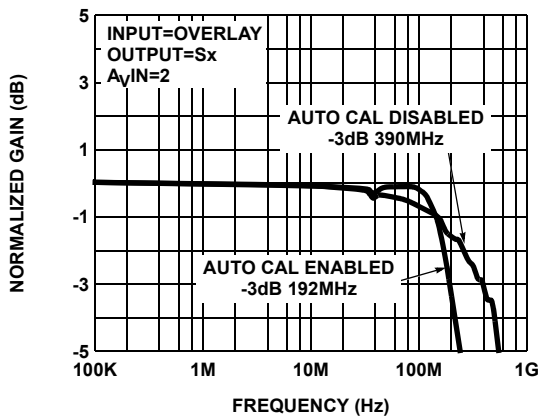


FIGURE 11. GAIN vs FREQUENCY FOR Sx CHANNEL FUNCTIONS

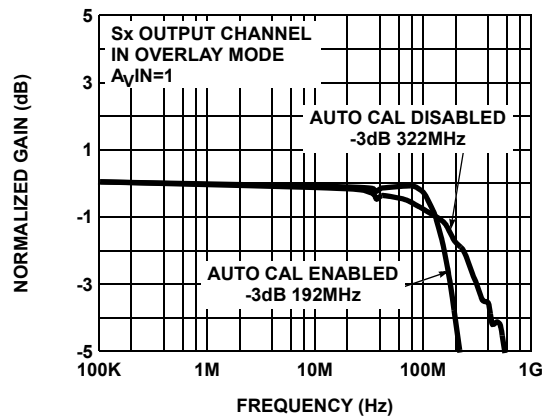


FIGURE 12. GAIN vs FREQUENCY FOR Sx CHANNEL FUNCTIONS

Typical Performance Curves (Continued)

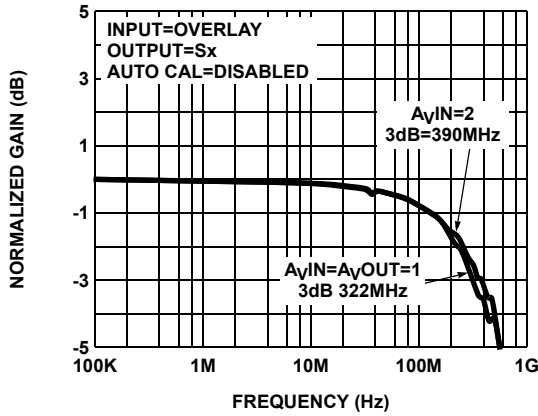


FIGURE 13. GAIN vs FREQUENCY FOR VARIOUS GAINS

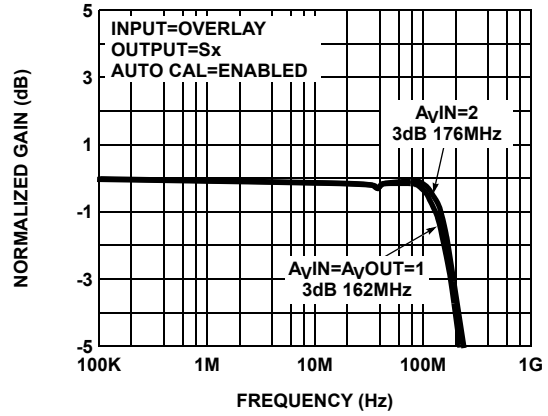


FIGURE 14. GAIN vs FREQUENCY FOR VARIOUS GAINS

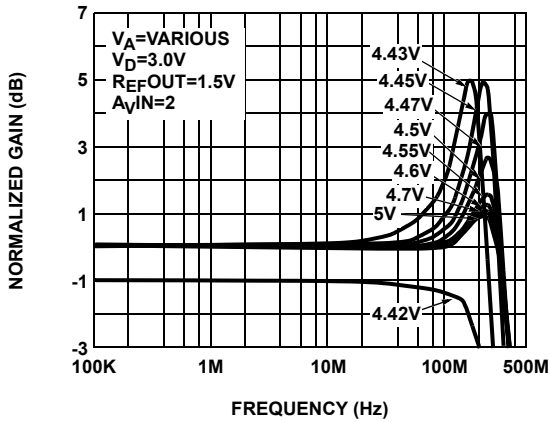


FIGURE 15. PEAKING FOR VARIOUS POWER SUPPLY SETTINGS

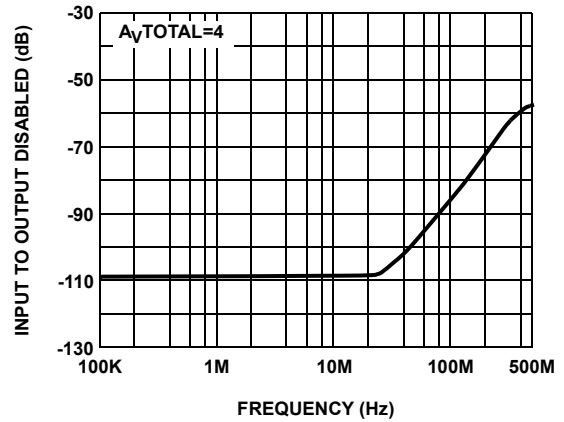


FIGURE 16. INPUT TO OUTPUT ISOLATION (DISABLED)

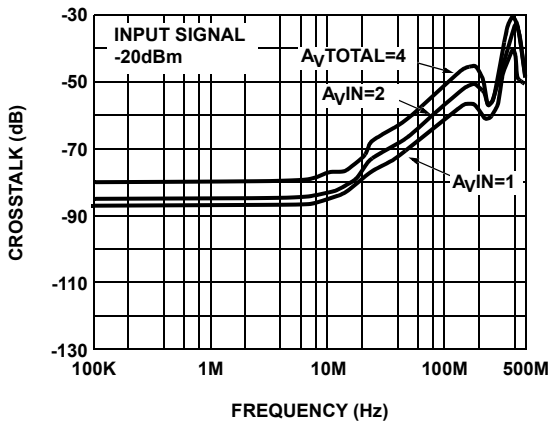


FIGURE 17. CROSSTALK FOR VARIOUS GAINS

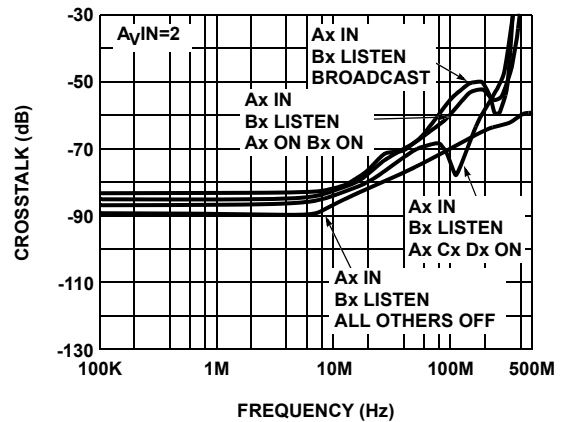


FIGURE 18. CROSSTALK FOR VARIOUS BROADCAST MODES

Typical Performance Curves (Continued)

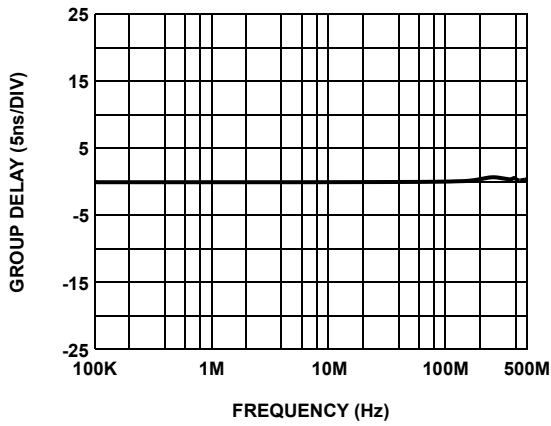


FIGURE 19. GROUP DELAY FOR OUTPUT CHANNELS A, B, C, D, S

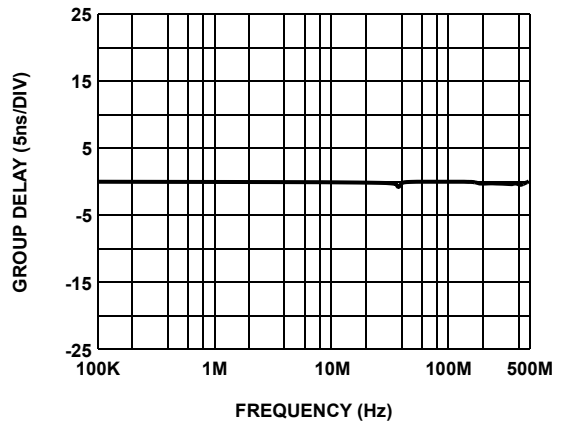


FIGURE 20. GROUP DELAY FOR OVERLAY MODE

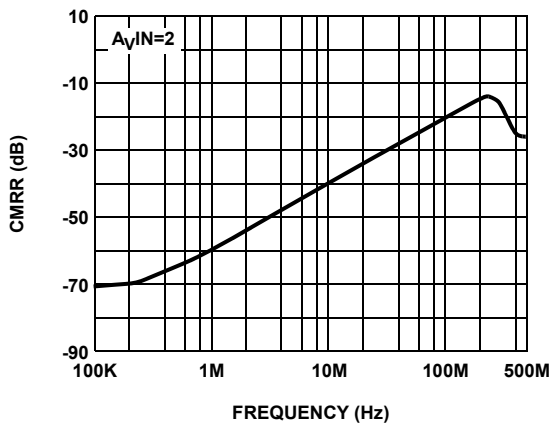


FIGURE 21. CMRR

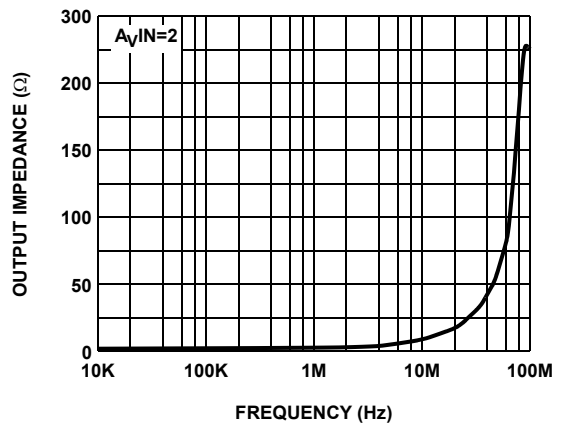


FIGURE 22. OUTPUT IMPEDANCE

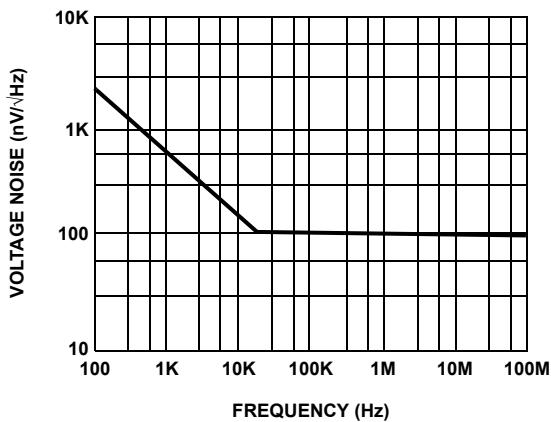


FIGURE 23. VOLTAGE NOISE vs FREQUENCY

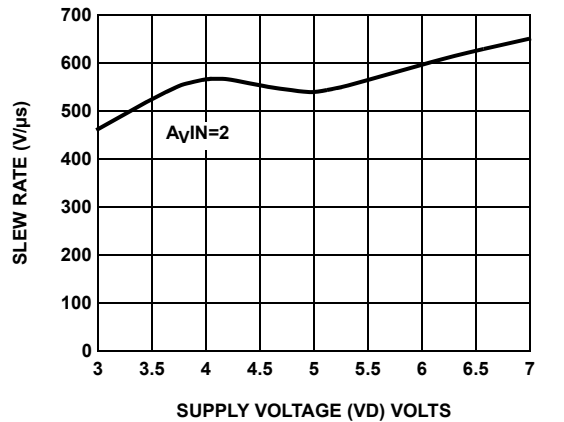


FIGURE 24. SLEW RATE vs SUPPLY (VD)

Typical Performance Curves (Continued)

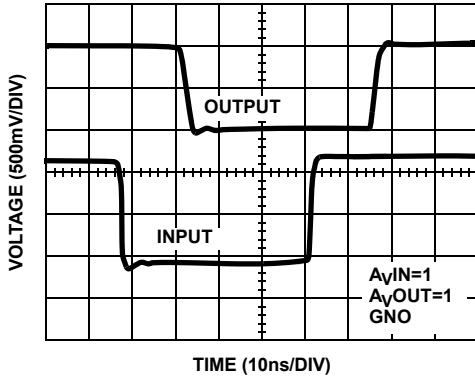


FIGURE 25. SMALL SIGNAL NEGATIVE PULSE RESPONSE

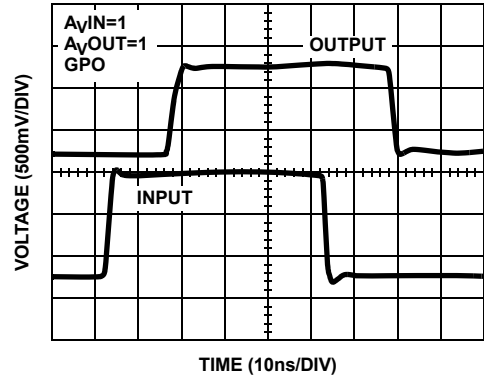


FIGURE 26. SMALL SIGNAL POSITIVE PULSE RESPONSE

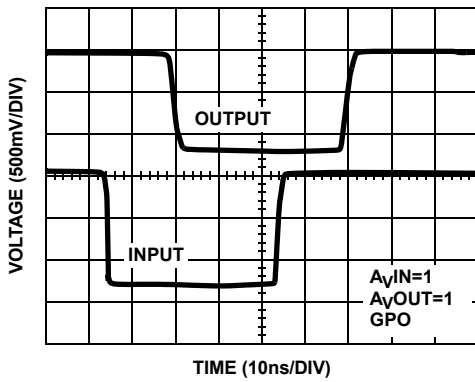


FIGURE 27. LARGE SIGNAL NEGATIVE PULSE RESPONSE

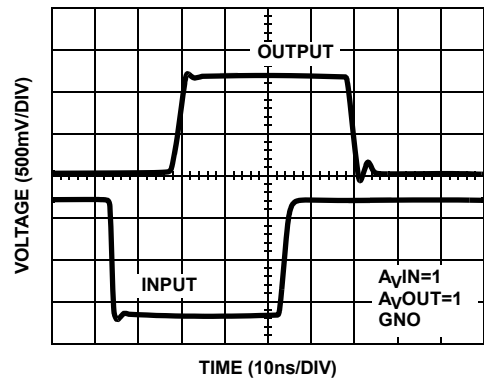


FIGURE 28. LARGE SIGNAL POSITIVE PULSE RESPONSE

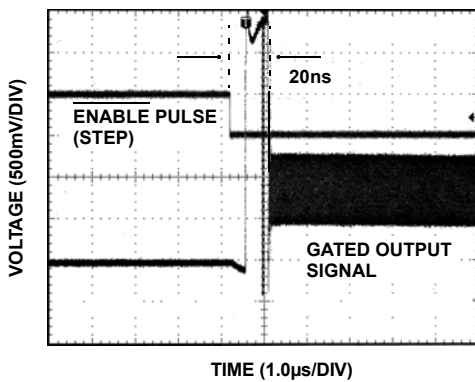


FIGURE 29. ENABLE TIME

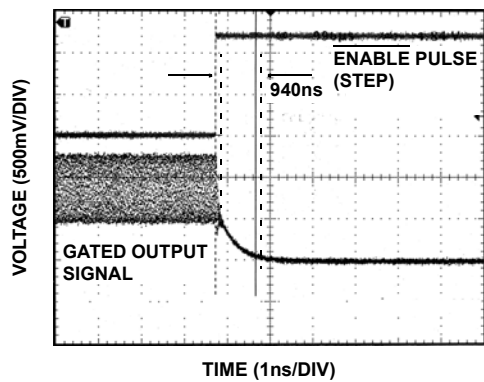


FIGURE 30. DISABLE TIME

Typical Performance Curves (Continued)

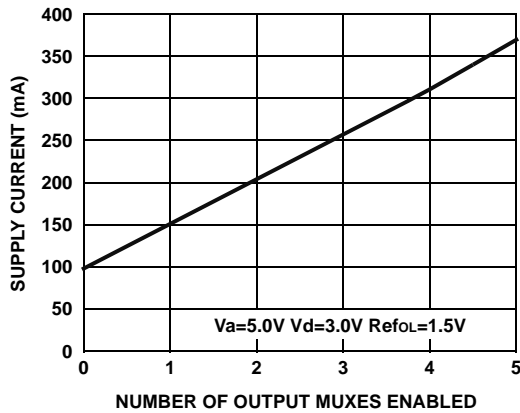


FIGURE 31. POWER SUPPLY CURRENT AS FUNCTION OF OUTPUT MUXES ENABLED - ALL INPUT MUXES DISABLED

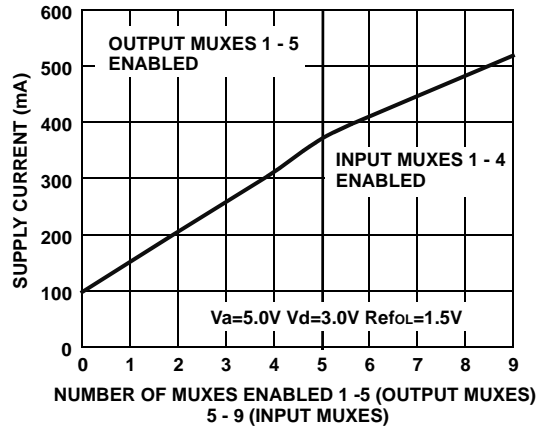


FIGURE 32. POWER SUPPLY CURRENT AS FUNCTION OF INPUT & OUTPUT MUXES ENABLED

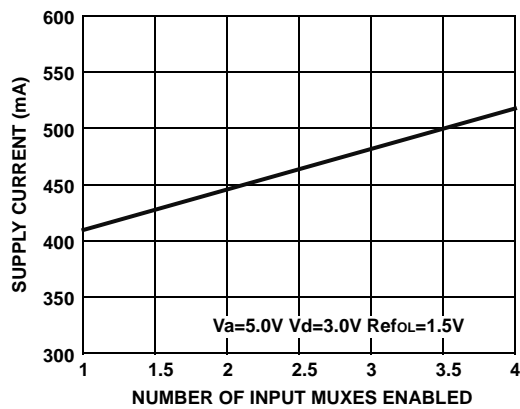


FIGURE 33. POWER SUPPLY CURRENT AS FUNCTION OF INPUT MUXES ENABLED - ALL OUTPUT MUXES ENABLED

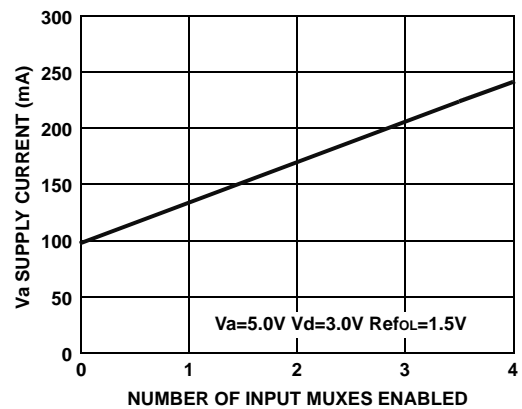


FIGURE 34. POWER SUPPLY CURRENT AS FUNCTION OF INPUT MUXES ENABLED - ALL OUTPUT MUXES DISABLED

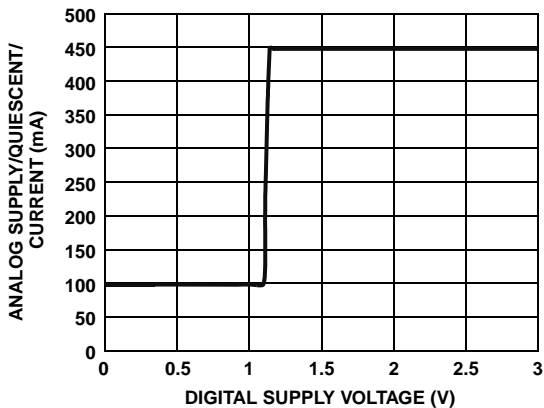


FIGURE 35. ANALOG CURRENT vs DIGITAL SUPPLY VOLTAGE

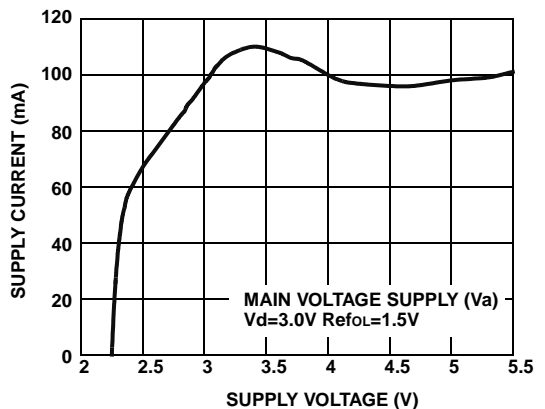


FIGURE 36. SUPPLY CURRENT VERSUS SUPPLY VOLTAGE BASE LINE IDLE - ALL INPUTS AND OUTPUTS DISABLED

Typical Performance Curves (Continued)

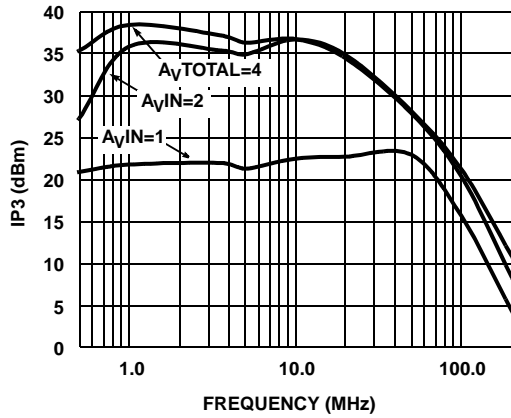


FIGURE 37. THIRD-ORDER INTERCEPT POINT vs FREQUENCY GREEN CHANNEL

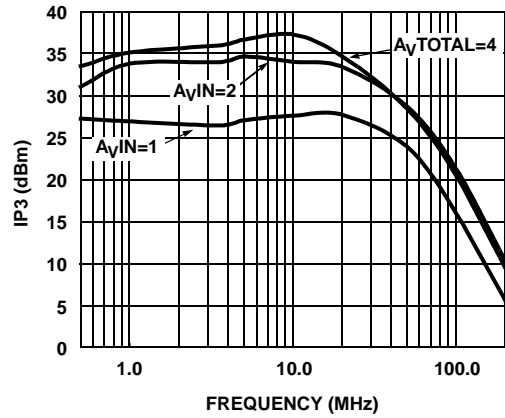


FIGURE 38. THIRD-ORDER INTERCEPT POINT vs FREQUENCY BLUE CHANNEL

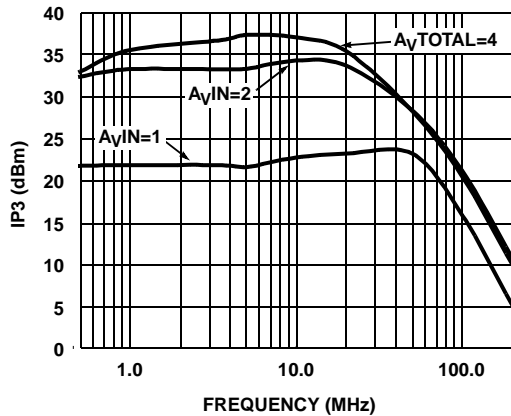


FIGURE 39. THIRD-ORDER INTERCEPT POINT vs FREQUENCY RED CHANNEL

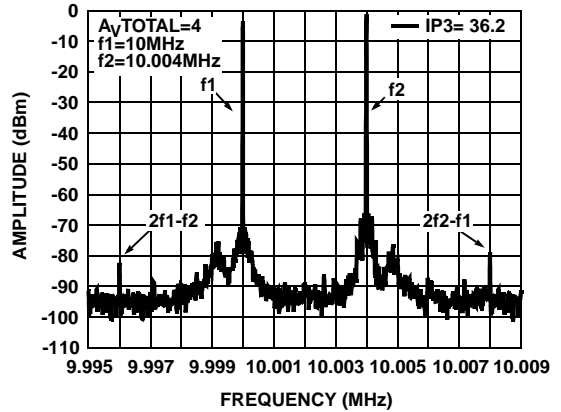


FIGURE 40. IP3 $A_{V\text{TOTAL}} = 4$ BLUE CHANNEL

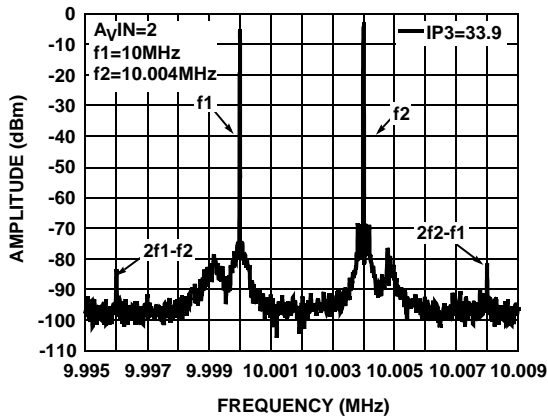


FIGURE 41. IP3 $A_{V\text{IN}} = 2$ BLUE CHANNEL

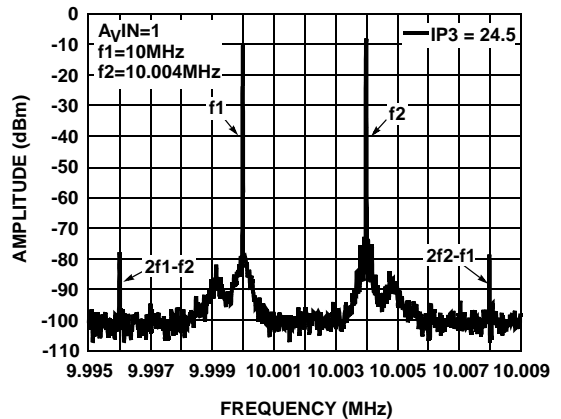


FIGURE 42. IP3 $A_{V\text{IN}} = 1$ BLUE CHANNEL

All Intersil U.S. products are manufactured, assembled and tested utilizing ISO9000 quality systems.
Intersil Corporation's quality certifications can be viewed at www.intersil.com/design/quality

Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design, software and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.

For information regarding Intersil Corporation and its products, see www.intersil.com