

Bulletin PD-20708 rev. G 07/04

International IOR Rectifier

10BQ030

SCHOTTKY RECTIFIER

1 Amp

$I_{F(AV)} = 1 \text{ Amp}$
 $V_R = 30V$

Major Ratings and Characteristics

| Characteristics | 10BQ030 | Units |
|---|-------------|------------------|
| $I_{F(AV)}$ Rectangular waveform | 1.0 | A |
| V_{RRM} | 30 | V |
| I_{FSM} @ $t_p = 5 \text{ ms}$ sine | 430 | A |
| V_F @ 1.0 Apk , $T_J = 125^\circ\text{C}$ | 0.30 | V |
| T_J range | - 55 to 150 | $^\circ\text{C}$ |


Description/ Features

The 10BQ030 surface-mount Schottky rectifier has been designed for applications requiring low forward drop and small foot prints on PC boards. Typical applications are in disk drives, switching power supplies, converters, free-wheeling diodes, battery charging, and reverse battery protection.

- Small foot print, surface mountable
- Very low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

Case Styles

10BQ030



SMB

Cathode Anode

10BQ030

Bulletin PD-20708 rev. G 07/04

International
IR Rectifier

Voltage Ratings

| | |
|--|---------|
| Part number | 10BQ030 |
| V _R Max. DC Reverse Voltage (V) | 30 |
| V _{RWM} Max. Working Peak Reverse Voltage (V) | |

Absolute Maximum Ratings

| Parameters | 10BQ | Units | Conditions |
|--|------|-------|---|
| I _{F(AV)} Max. Average Forward Current | 1.0 | A | 50% duty cycle @ T _L = 106 °C, rectangular wave form. |
| I _{FSM} Max. Peak One Cycle Non-Repetitive Surge Current * See Fig. 6 | 430 | | 5µs Sine or 3µs Rect. pulse |
| | 90 | | 10ms Sine or 6ms Rect. pulse |
| E _{AS} Non-Repetitive Avalanche Energy | 3.0 | mJ | T _J = 25 °C, I _{AS} = 1A, L = 6mH |
| I _{AR} Repetitive Avalanche Current | 1.0 | A | Current decaying linearly to zero in 1 µsec Frequency limited by T _J max. Va = 1.5 x Vr typical |

Electrical Specifications

| Parameters | 10BQ | Units | Conditions |
|---|-------|-------|---|
| V _{FM} Max. Forward Voltage Drop (1) | 0.420 | V | @ 1A |
| | 0.470 | V | @ 2A |
| V _{FM} Max. Forward Voltage Drop (1) | 0.300 | V | @ 1A |
| | 0.370 | V | @ 2A |
| I _{RM} Max. Reverse Leakage Current (1) | 0.5 | mA | T _J = 25 °C |
| | 5.0 | mA | T _J = 100 °C |
| | 15 | mA | T _J = 125 °C |
| C _T Max. Junction Capacitance | 200 | pF | V _R = 5V _{DC} , (test signal range 100KHz to 1Mhz) 25°C |
| L _S Typical Series Inductance | 2.0 | nH | Measured lead to lead 5mm from package body |
| dv/dt Max. Voltage Rate of Change (Rated V _R) | 10000 | V/µs | |

(1) Pulse Width < 300µs, Duty Cycle < 2%

Thermal-Mechanical Specifications

| Parameters | 10BQ | Units | Conditions |
|---|-------------|--------|------------------|
| T _J Max. Junction Temperature Range (*) | -55 to 150 | °C | |
| T _{stg} Max. Storage Temperature Range | -55 to 150 | °C | |
| R _{thJL} Max. Thermal Resistance Junction to Lead (**) | 25 | °C/W | DC operation |
| R _{thJA} Max. Thermal Resistance Junction to Ambient | 80 | °C/W | |
| wt Approximate Weight | 0.10(0.003) | g(oz.) | |
| Case Style | SMB | | Similar DO-214AA |
| Device Marking | IR1E | | |

(*) $\frac{dP_{tot}}{dT_j} < \frac{1}{R_{th(j-a)}}$ thermal runaway condition for a diode on its own heatsink

(**) Mounted 1 inch square PCB

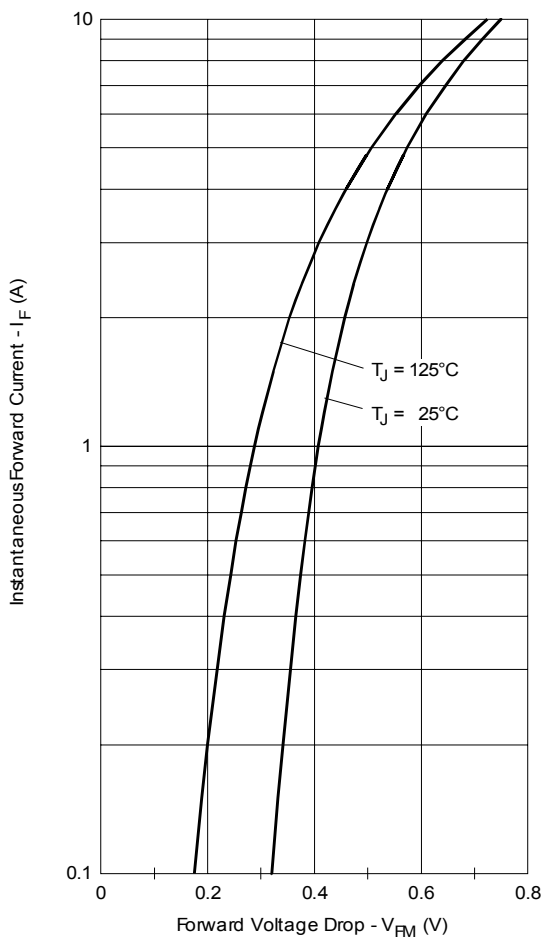


Fig. 1 - Maximum Forward Voltage Drop Characteristics

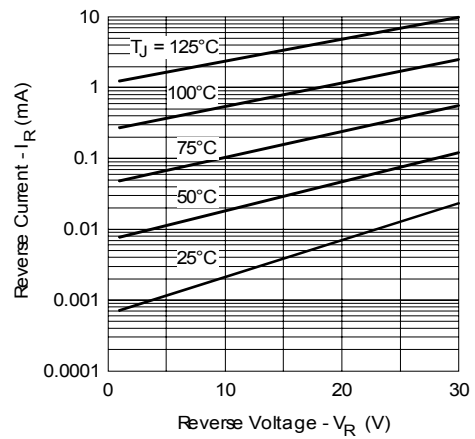


Fig. 2 - Typical Peak Reverse Current Vs. Reverse Voltage

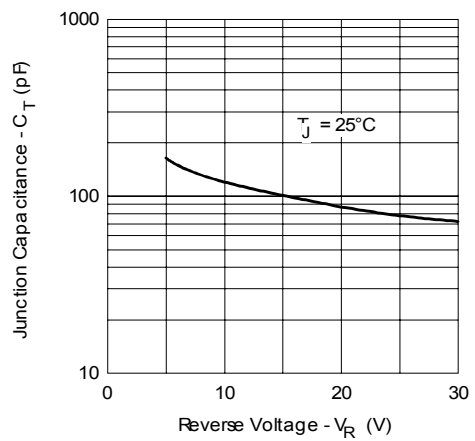


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

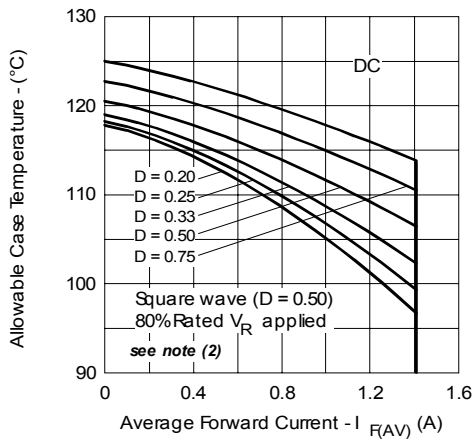


Fig. 4 - Maximum Average Forward Current Vs. Allowable Lead Temperature

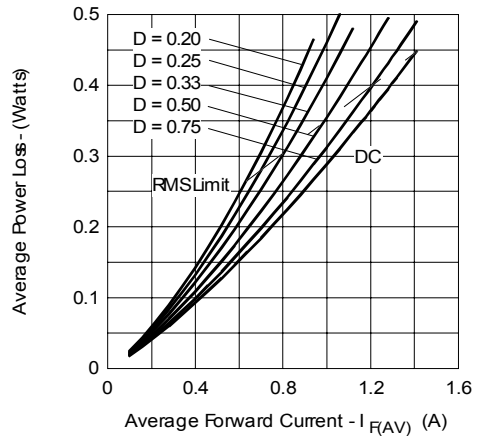


Fig. 5 - Maximum Average Forward Dissipation Vs. Average Forward Current


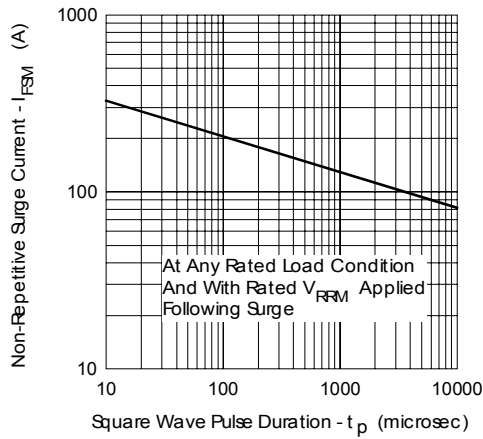



Fig. 6 - Maximum Peak Surge Forward Current Vs. Pulse Duration

- (2) Formula used: $T_C = T_J - (Pd + Pd_{REV}) \times R_{thJC}$;
 Pd = Forward Power Loss = $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);
 Pd_{REV} = Inverse Power Loss = $V_{R1} \times I_R (1 - D)$; $I_R @ V_{R1} = 80\%$ rated V_R

Outline Table

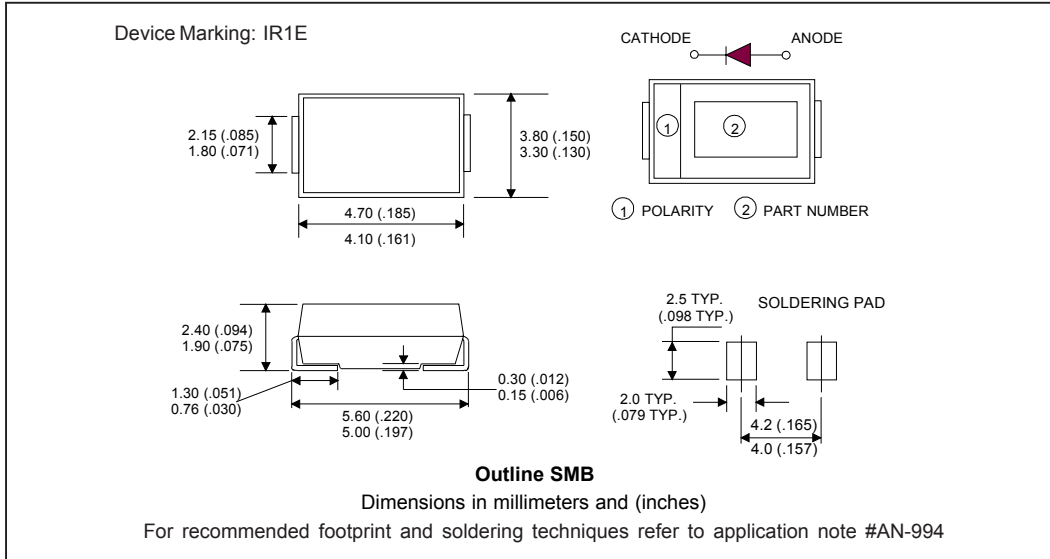

Marking & Identification

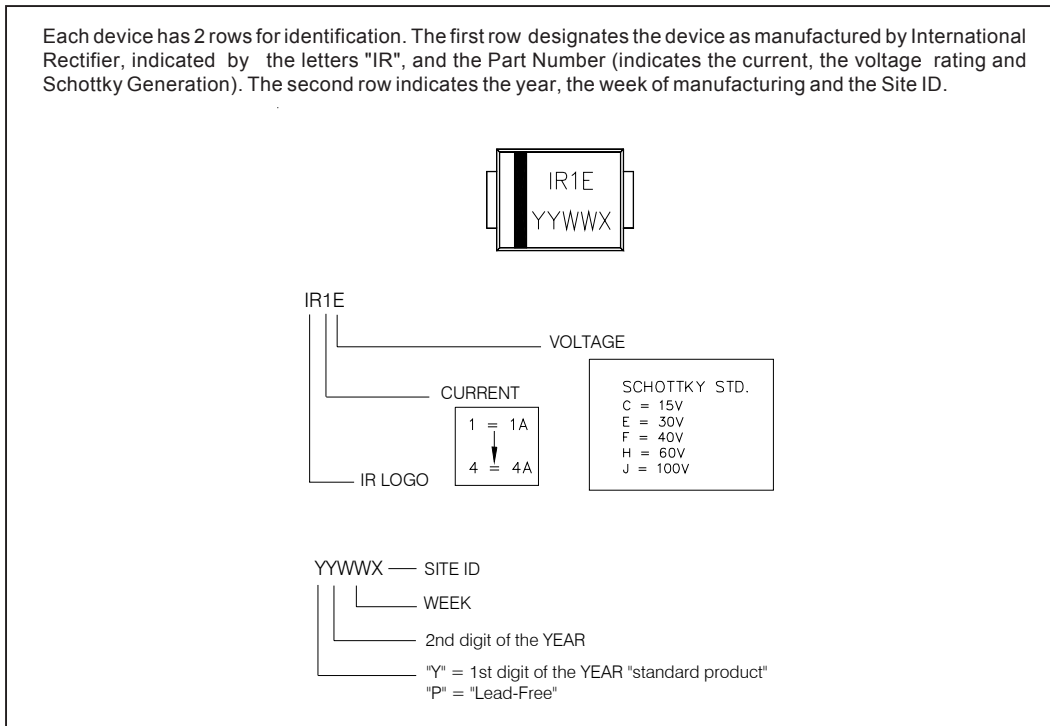


10BQ030

Bulletin PD-20708 rev. G 07/04

International
IR Rectifier

Tape & Reel Information

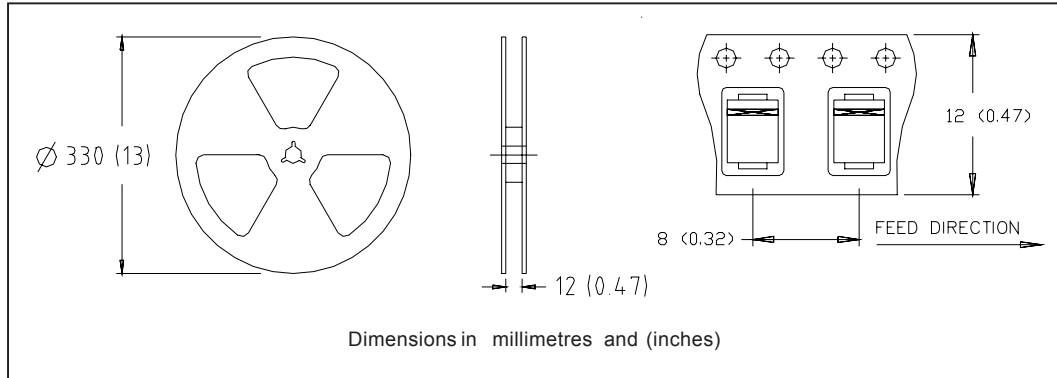

Ordering Information Table

| Device Code | | | | | |
|-------------|----------|----------------------------------|------------|-----------|----------|
| 10 | B | Q | 030 | TR | - |
| ① | ② | ③ | ④ | ⑤ | ⑥ |
| 1 | - | Current Rating | | | |
| 2 | - | B = Single Lead Diode | | | |
| 3 | - | Q = Schottky Q Series | | | |
| 4 | - | Voltage Rating (030 = 30V) | | | |
| 5 | - | • none = Box (1000 pieces) | | | |
| | | • TR = Tape & Reel (3000 pieces) | | | |
| 6 | - | • none = Standard Production | | | |
| | | • PbF = Lead-Free | | | |

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level.
Qualification Standards can be found on IR's Web site.

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
Visit us at www.irf.com for sales contact information. 07/04