

The RF MOSFET Line


RF Power

Field Effect Transistors

N-Channel Enhancement-Mode Lateral MOSFETs

Designed for broadband commercial and industrial applications at frequencies to 1.0 GHz. The high gain and broadband performance of these devices makes them ideal for large-signal, common source amplifier applications in 28 volt base station equipment.

- Guaranteed Performance at 945 MHz, 28 Volts
 - Output Power – 45 Watts PEP
 - Power Gain – 11.5 dB
 - Efficiency – 33%
 - IMD – 28 dBc
- Characterized with Series Equivalent Large-Signal Impedance Parameters
- S-Parameter Characterization at High Bias Levels
- Excellent Thermal Stability
- 100% Tested for Load Mismatch Stress at all Phase Angles with 5:1 VSWR @ 28 Vdc, 945 MHz, 45 Watts CW



MAXIMUM RATINGS

| Rating | Symbol | Value | Unit |
|---|------------------|-------------|-----------|
| Drain-Source Voltage | V _{DSS} | 65 | Vdc |
| Drain-Gate Voltage (RGS = 1 Meg Ohm) | V _{DGR} | 65 | Vdc |
| Gate-Source Voltage | V _{GS} | ±20 | Vdc |
| Drain Current – Continuous | I _D | 5 | Adc |
| Total Device Dissipation @ T _C = 70°C Derate above 70°C | P _D | 86 0.67 | W W/°C |
| Storage Temperature Range | T _{stg} | -65 to +200 | °C |
| Operating Junction Temperature | T _J | 200 | °C |


THERMAL CHARACTERISTICS

| Characteristic | Symbol | Max | Unit |
|--------------------------------------|------------------|-----|------|
| Thermal Resistance, Junction to Case | R _{θJC} | 1.5 | °C/W |


NOTE – **CAUTION** – MOS devices are susceptible to damage from electrostatic charge. Reasonable precautions in handling and packaging MOS devices should be observed.

MRF183 MRF183S

45 W, 1.0 GHz
LATERAL N-CHANNEL
BROADBAND
RF POWER MOSFETs



CASE 360B-01, STYLE 1
(MRF183)



CASE 360C-03, STYLE 1
(MRF183S)

ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise noted)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|---|------------|-----|-----|-----|---------------|
| OFF CHARACTERISTICS | | | | | |
| Drain–Source Breakdown Voltage ($V_{GS} = 0$, $I_D = 50 \mu\text{A}$) | BV_{DSS} | 65 | — | — | Vdc |
| Zero Gate Voltage Drain Current ($V_{DS} = 28$ V, $V_{GS} = 0$) | I_{DSS} | — | — | 1 | μA |
| Gate–Source Leakage Current ($V_{GS} = 20$ V, $V_{DS} = 0$) | I_{GSS} | — | — | 1 | μA |

ON CHARACTERISTICS

| | | | | | |
|---|--------------|---|-----|---|-----|
| Gate Quiescent Voltage ($V_{DS} = 28$ Vdc, $I_D = 250$ mA) | $V_{GS(Q)}$ | 3 | — | 5 | Vdc |
| Drain–Source On–Voltage ($V_{GS} = 10$ V, $I_D = 3$ A) | $V_{DS(on)}$ | — | 0.7 | — | Vdc |
| Forward Transconductance ($V_{DS} = 10$ Vdc, $I_D = 5$ Adc) | g_{fs} | — | 2 | — | S |

DYNAMIC CHARACTERISTICS

| | | | | | |
|--|-----------|---|-----|---|----|
| Input Capacitance ($V_{DS} = 28$ V, $V_{GS} = 0$, $f = 1$ MHz) | C_{iss} | — | 82 | — | pF |
| Output Capacitance ($V_{DS} = 28$ V, $V_{GS} = 0$, $f = 1$ MHz) | C_{oss} | — | 38 | — | pF |
| Reverse Transfer Capacitance ($V_{DS} = 28$ V, $V_{GS} = 0$, $f = 1$ MHz) | C_{rss} | — | 4.5 | — | pF |


FUNCTIONAL TESTS (In Motorola Test Fixture)

($V_{DD} = 28$ Vdc, $P_{out} = 45$ Watts PEP, $f_1 = 945.0$, $f_2 = 945.1$ MHz, $I_{DQ} = 250$ mA)

| | | | | | |
|---|----------|------|-----|-----|-----|
| Two-Tone Common Source Amplifier Power Gain | G_{ps} | 11.5 | 13 | — | dB |
| Two-Tone Drain Efficiency | η | 33 | 36 | — | % |
| 3rd Order Intermodulation Distortion | IMD | — | -32 | -28 | dBc |
| Input Return Loss | IRL | 9 | 14 | — | dB |

($V_{DD} = 28$ Vdc, $P_{out} = 45$ Watts PEP, $f_1 = 930.0$, $f_2 = 930.1$ MHz, and $f_1 = 960.0$, $f_2 = 960.1$ MHz, $I_{DQ} = 250$ mA)







| | | | | | |
|--|----------|---|-----|---|-----|
| Two-Tone Common Source Amplifier Power Gain | G_{ps} | — | 13 | — | dB |
| Two-Tone Drain Efficiency | η | — | 35 | — | % |
| 3rd Order Intermodulation Distortion | IMD | — | -32 | — | dBc |
| Input Return Loss | IRL | — | 12 | — | dB |
| Output Mismatch Stress ($V_{DD} = 28$ Vdc, $P_{out} = 45$ Watts CW, $I_{DQ} = 250$ mA, $f = 945$ MHz, VSWR 5:1 at All Phase Angles) | Ψ | No Degradation in Output Power Before and After Test | | | |

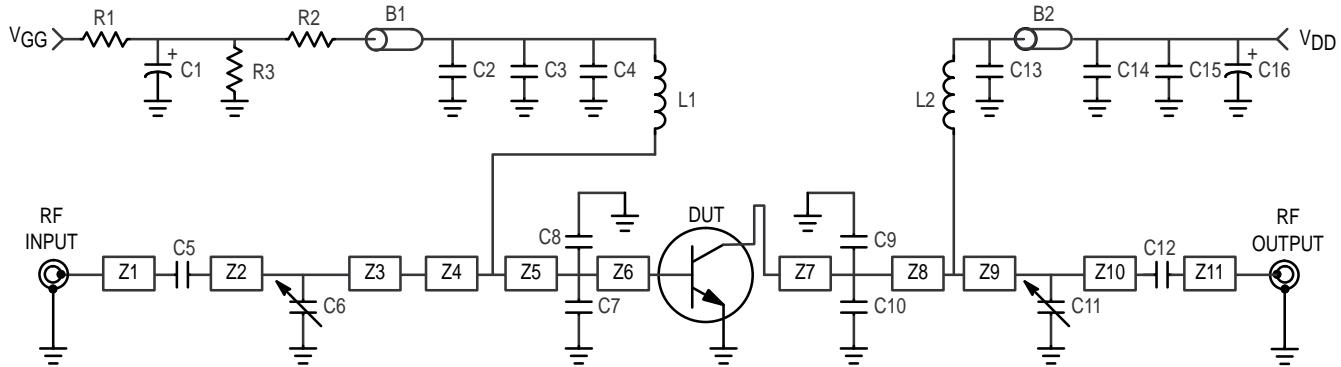






| | | | |
|---------|-------------------------------------|-------|---|
| B1 | Short Ferrite Bead | R3 | 4.7 MΩ, 1/4 W Carbon |
| B2 | Long Ferrite Bead | Z1 | T-Line, 0.200" x 0.080" |
| C1 | 10 µF, 50 V Electrolytic Capacitor | Z2 | T-Line, 0.570" x 0.120" |
| C2, C14 | 0.1 µF Chip Capacitor | Z3 | T-Line, 0.610" x 0.320" |
| C3 | 1000 pF Chip Capacitor | Z4 | T-Line, 0.160" x 0.320" x 0.620" |
| C4, C13 | 47 pF Chip Capacitor | Z5 | T-Line, 0.650" x 0.620" |
| C5, C12 | 47 pF Chip Capacitor | Z6 | T-Line, 0.020" x 0.620" |
| C6, C11 | 0.8–8.0 pF Trim Capacitor | Z7 | T-Line, 0.270" x 0.320" |
| C7, C8 | 10 pF Chip Capacitor | Z8 | T-Line, 0.130" x 0.320" |
| C9, C10 | 10 pF Chip Capacitor | Z9 | T-Line, 0.370" x 0.080" |
| C15 | 100 pF Chip Capacitor | Z10 | T-Line, 1.050" x 0.080" |
| C16 | 250 µF, 50 V Electrolytic Capacitor | Z11 | T-Line, 0.290" x 0.080" |
| L1, L2 | 5 Turns, 24 AWG, ID 0.059" | Board | 0.030" Glass Teflon, $\epsilon_r = 2.55$ ARLON-GX-0300-55-22 |
| R1 | 120 Ω, 1/4 W Carbon | | |
| R2 | 18 kΩ, 1/4 W Carbon | | |

Figure 1. MRF183S Two Tone Test Circuit Schematic

TYPICAL CHARACTERISTICS

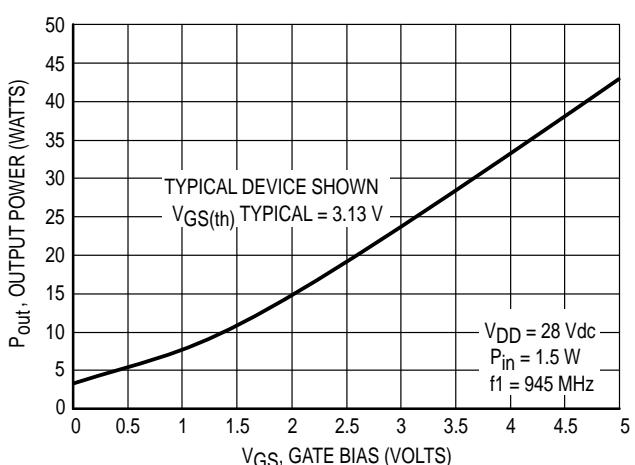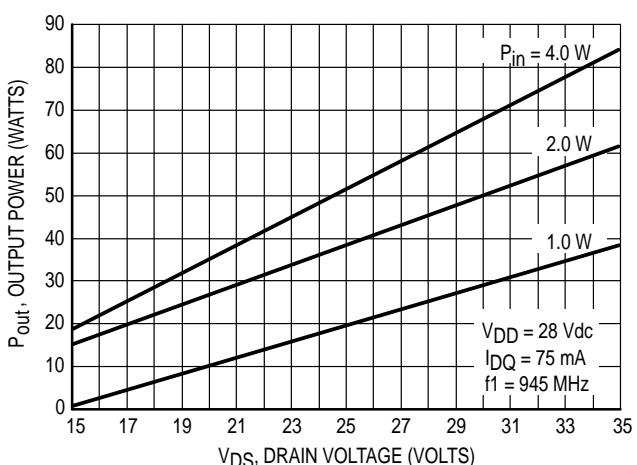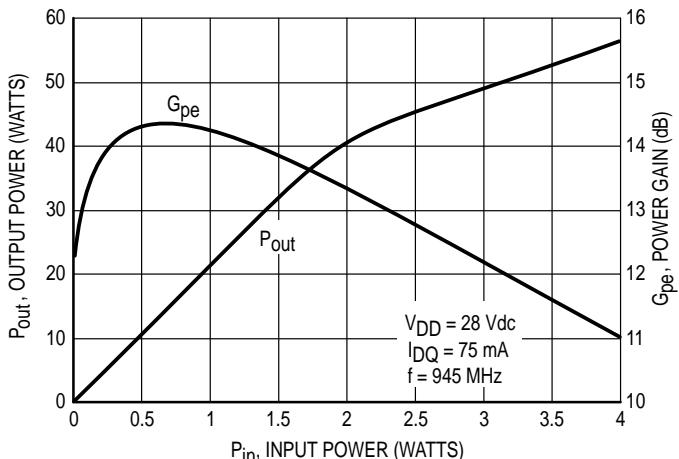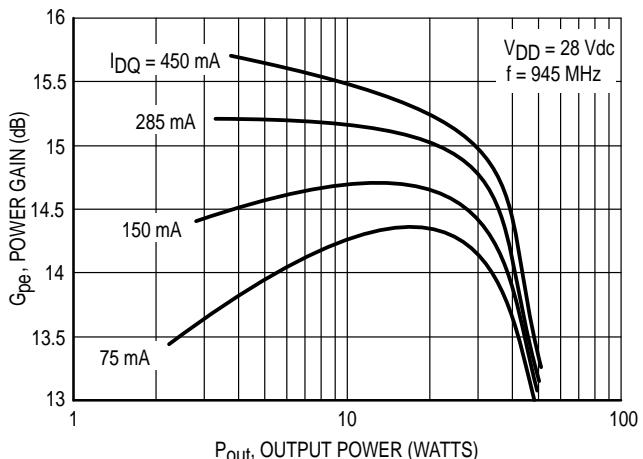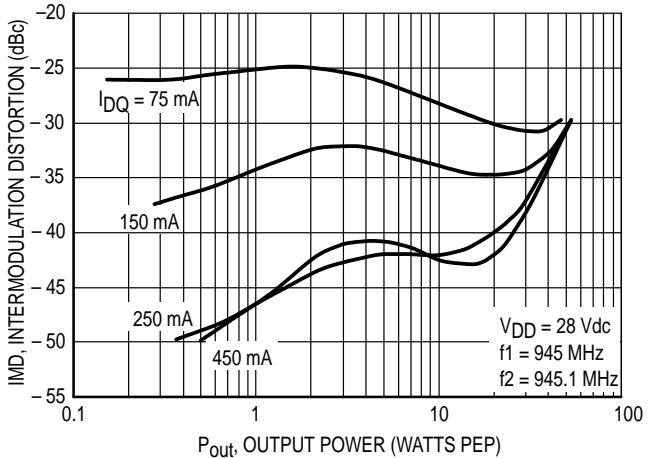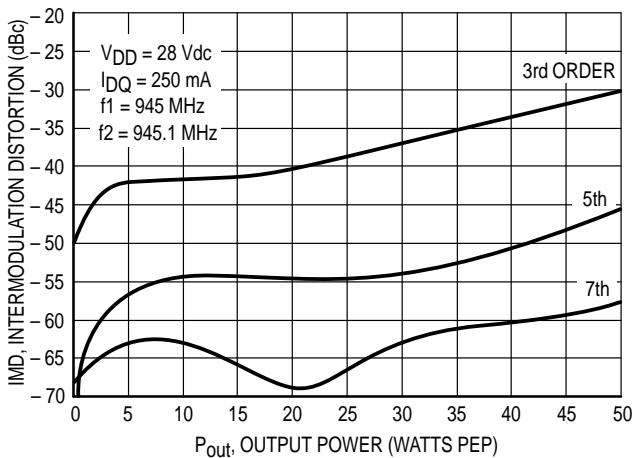

TYPICAL CHARACTERISTICS

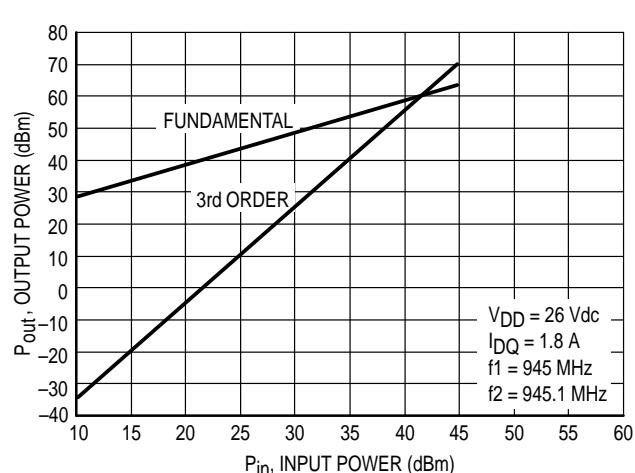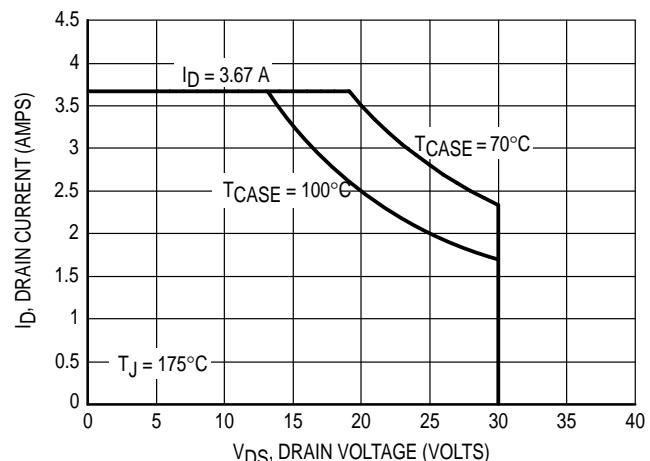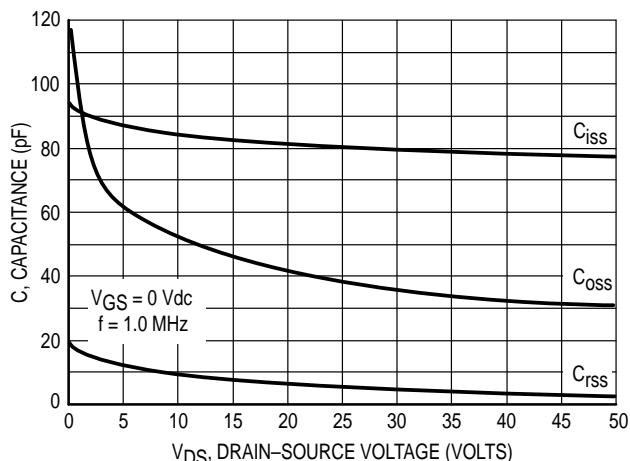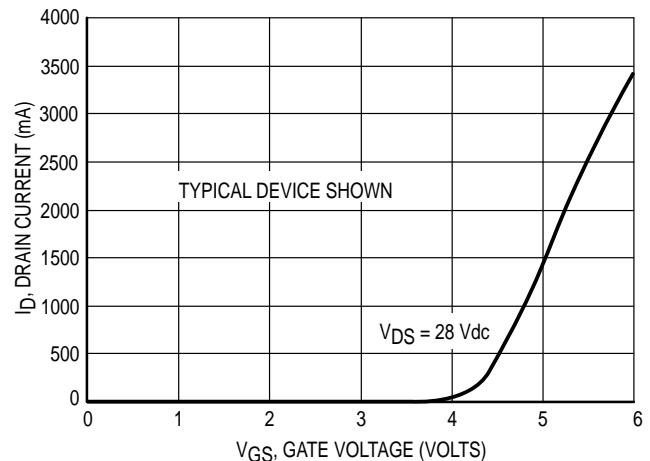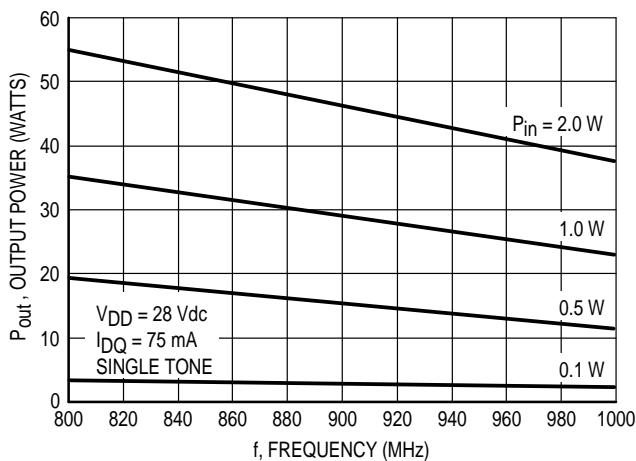

TYPICAL CHARACTERISTICS

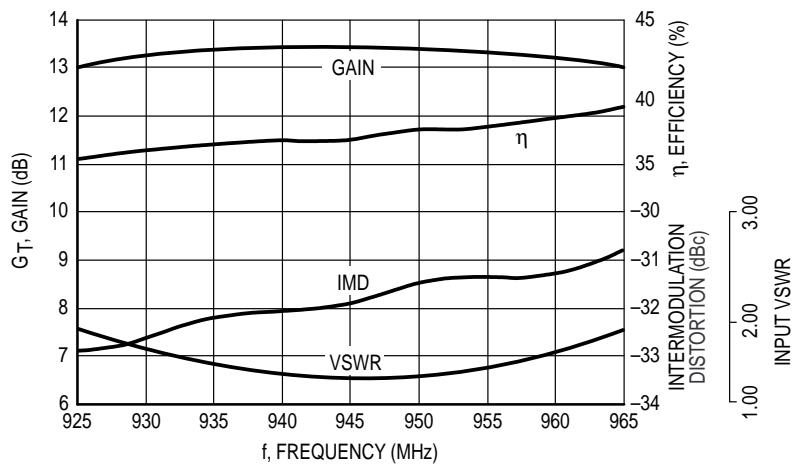


Figure 13. Broadband Power Performance of MRF183S


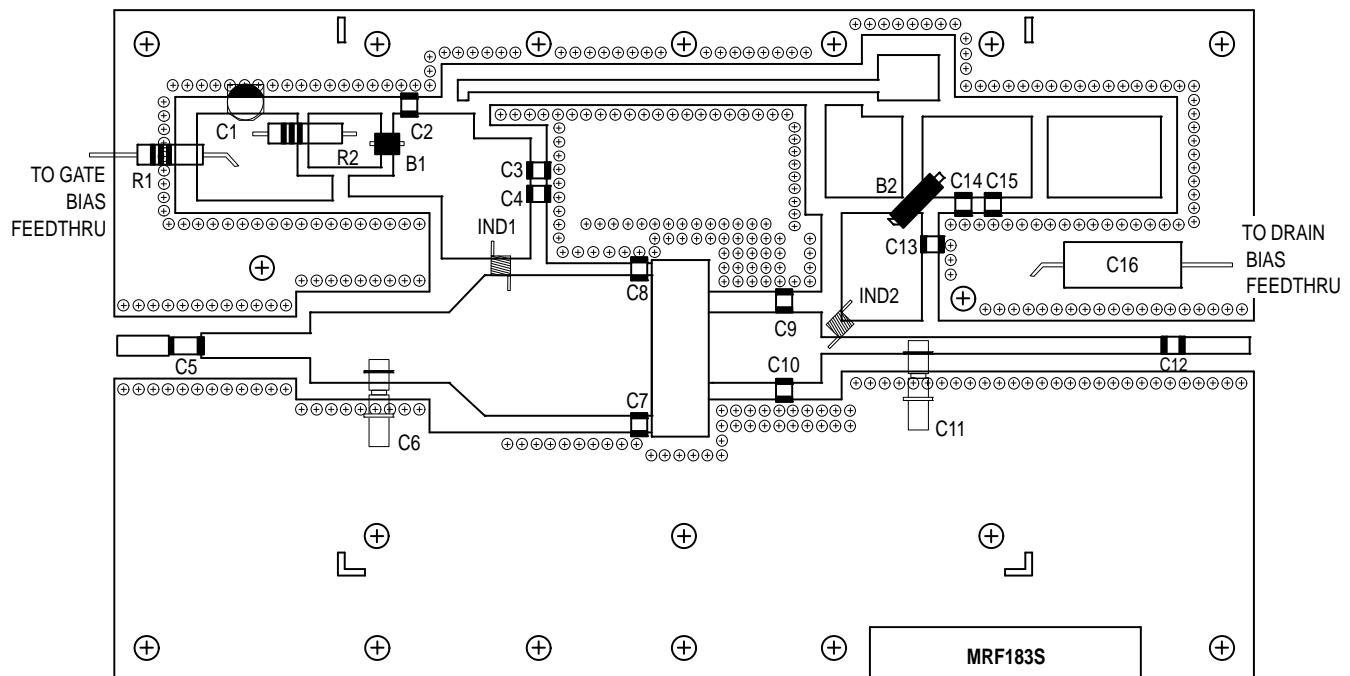


Figure 14. MRF183S Two Tone Test Circuit Component Parts Layout

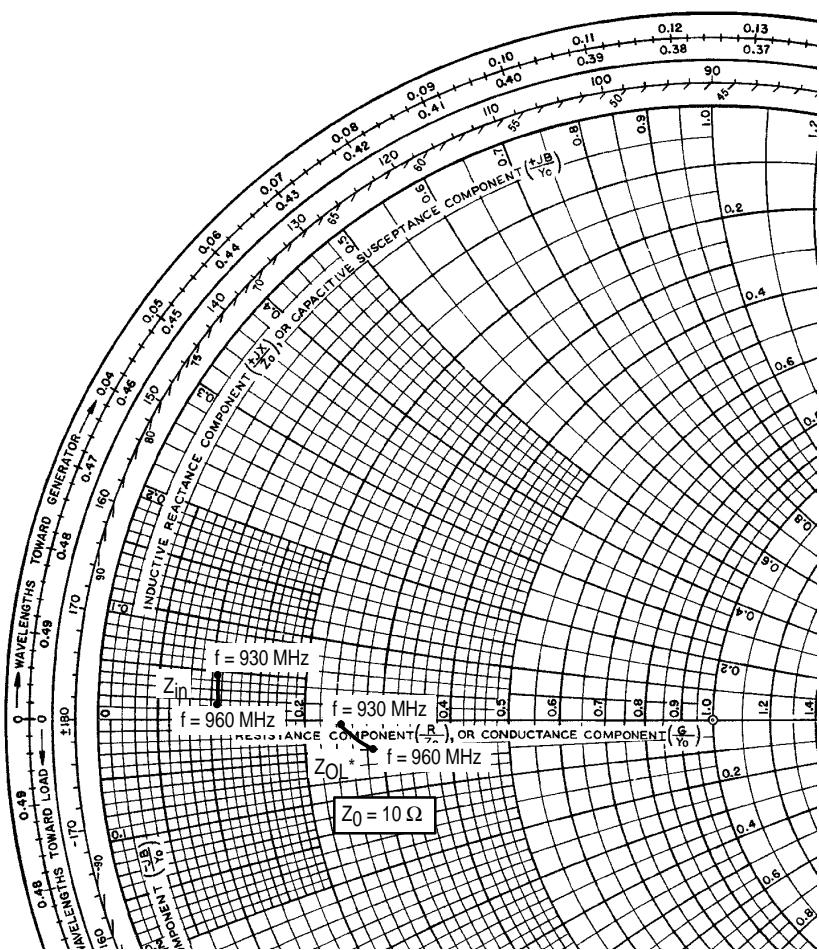

$V_{DD} = 28 \text{ V}$, $I_{DQ} = 250 \text{ mA}$, $P_{out} = 45 \text{ W}$ (PEP)

| f MHz | Z_{in} Ohms | Z_{OL}^* Ohms |
|------------|------------------|--------------------|
| 930 | $1.10 + j0.93$ | $2.60 - j0.13$ |
| 945 | $1.10 + j0.78$ | $2.70 - j0.28$ |
| 960 | $1.10 + j0.60$ | $2.80 - j0.42$ |

Z_{in} = Conjugate of source impedance.

Z_{OL}^* = Conjugate of the load impedance at given output power, voltage and current conditions.

Note: Z_{OL}^* was chosen based on tradeoffs between gain, output power, drain efficiency and intermodulation distortion.

Figure 15. Series Equivalent Input and Output Impedance

Table 1. Typical Common Source S–Parameters ($V_{DS} = 13.5$ V)

$I_D = 1.5$ A

| f MHz | S_{11} | | S_{21} | | S_{12} | | S_{22} | |
|----------|------------|--------------|------------|--------------|------------|--------------|------------|--------------|
| | $ S_{11} $ | $\angle\phi$ | $ S_{21} $ | $\angle\phi$ | $ S_{12} $ | $\angle\phi$ | $ S_{22} $ | $\angle\phi$ |
| 20 | 0.954 | -157 | 29.58 | 100 | 0.017 | 11 | 0.778 | -161 |
| 30 | 0.941 | -164 | 19.73 | 96 | 0.017 | 8 | 0.796 | -168 |
| 40 | 0.922 | -168 | 14.84 | 93 | 0.017 | 4 | 0.804 | -170 |
| 50 | 0.907 | -171 | 11.94 | 91 | 0.017 | 3 | 0.808 | -172 |
| 60 | 0.903 | -172 | 9.75 | 89 | 0.017 | 2 | 0.812 | -173 |
| 70 | 0.899 | -173 | 8.34 | 88 | 0.017 | 0 | 0.814 | -174 |
| 80 | 0.898 | -174 | 7.29 | 86 | 0.017 | -1 | 0.816 | -175 |
| 90 | 0.896 | -175 | 6.49 | 85 | 0.017 | -2 | 0.816 | -175 |
| 100 | 0.897 | -175 | 5.83 | 84 | 0.017 | -2 | 0.817 | -175 |
| 150 | 0.895 | -177 | 3.82 | 79 | 0.017 | -6 | 0.822 | -176 |
| 200 | 0.898 | -178 | 2.84 | 74 | 0.016 | -9 | 0.828 | -176 |
| 250 | 0.902 | -178 | 2.24 | 70 | 0.016 | -11 | 0.835 | -176 |
| 300 | 0.908 | -179 | 1.84 | 66 | 0.015 | -14 | 0.842 | -176 |
| 350 | 0.905 | -179 | 1.55 | 62 | 0.015 | -16 | 0.850 | -176 |
| 400 | 0.913 | -180 | 1.32 | 58 | 0.014 | -18 | 0.861 | -176 |
| 450 | 0.920 | 180 | 1.15 | 54 | 0.014 | -18 | 0.865 | -176 |
| 500 | 0.924 | 179 | 1.01 | 51 | 0.013 | -20 | 0.874 | -177 |
| 550 | 0.922 | 179 | 0.89 | 47 | 0.013 | -21 | 0.881 | -177 |
| 600 | 0.931 | 178 | 0.80 | 44 | 0.012 | -21 | 0.889 | -177 |
| 650 | 0.935 | 178 | 0.72 | 41 | 0.011 | -20 | 0.895 | -177 |
| 700 | 0.935 | 177 | 0.64 | 38 | 0.011 | -17 | 0.901 | -178 |
| 750 | 0.937 | 177 | 0.59 | 37 | 0.012 | -18 | 0.905 | -178 |
| 800 | 0.940 | 176 | 0.54 | 33 | 0.012 | -20 | 0.913 | -178 |
| 850 | 0.943 | 176 | 0.50 | 30 | 0.012 | -29 | 0.919 | -179 |
| 900 | 0.945 | 175 | 0.46 | 28 | 0.010 | -33 | 0.924 | -179 |
| 950 | 0.947 | 174 | 0.43 | 26 | 0.009 | -34 | 0.930 | -180 |
| 1000 | 0.947 | 174 | 0.40 | 24 | 0.008 | -29 | 0.935 | 180 |
| 1050 | 0.947 | 173 | 0.37 | 21 | 0.007 | -24 | 0.939 | 179 |
| 1100 | 0.952 | 172 | 0.35 | 19 | 0.007 | -19 | 0.944 | 179 |
| 1150 | 0.949 | 172 | 0.32 | 17 | 0.007 | -17 | 0.948 | 178 |
| 1200 | 0.946 | 171 | 0.30 | 14 | 0.006 | -16 | 0.948 | 177 |
| 1250 | 0.954 | 170 | 0.28 | 12 | 0.006 | -13 | 0.953 | 177 |
| 1300 | 0.952 | 170 | 0.27 | 9 | 0.006 | -12 | 0.950 | 176 |
| 1350 | 0.949 | 169 | 0.26 | 9 | 0.006 | -10 | 0.951 | 176 |
| 1400 | 0.948 | 168 | 0.23 | 8 | 0.005 | -7 | 0.953 | 175 |
| 1450 | 0.948 | 168 | 0.22 | 6 | 0.004 | 4 | 0.948 | 174 |
| 1500 | 0.940 | 167 | 0.21 | 4 | 0.004 | 19 | 0.944 | 174 |

Table 2. Typical Common Source S-Parameters ($V_{DS} = 28$ V)

$I_D = 1.5$ A

| f MHz | S_{11} | | S_{21} | | S_{12} | | S_{22} | |
|----------|------------|--------------|------------|--------------|------------|--------------|------------|--------------|
| | $ S_{11} $ | $\angle\phi$ | $ S_{21} $ | $\angle\phi$ | $ S_{12} $ | $\angle\phi$ | $ S_{22} $ | $\angle\phi$ |
| 20 | 0.968 | -132 | 45.79 | 113 | 0.014 | 24 | 0.579 | -145 |
| 30 | 0.953 | -145 | 31.75 | 106 | 0.015 | 17 | 0.623 | -157 |
| 40 | 0.921 | -154 | 24.33 | 99 | 0.015 | 12 | 0.648 | -161 |
| 50 | 0.904 | -159 | 19.68 | 95 | 0.015 | 7 | 0.661 | -164 |
| 60 | 0.898 | -163 | 16.11 | 92 | 0.015 | 5 | 0.670 | -166 |
| 70 | 0.890 | -165 | 13.79 | 90 | 0.015 | 2 | 0.677 | -167 |
| 80 | 0.886 | -167 | 12.06 | 87 | 0.015 | 1 | 0.681 | -168 |
| 90 | 0.886 | -168 | 10.71 | 86 | 0.015 | -1 | 0.684 | -169 |
| 100 | 0.887 | -169 | 9.61 | 84 | 0.015 | -3 | 0.688 | -169 |
| 150 | 0.886 | -172 | 6.26 | 76 | 0.015 | -9 | 0.706 | -170 |
| 200 | 0.890 | -174 | 4.59 | 69 | 0.014 | -13 | 0.724 | -170 |
| 250 | 0.898 | -175 | 3.57 | 64 | 0.014 | -17 | 0.744 | -169 |
| 300 | 0.906 | -176 | 2.88 | 59 | 0.013 | -19 | 0.764 | -169 |
| 350 | 0.908 | -177 | 2.37 | 54 | 0.012 | -23 | 0.785 | -169 |
| 400 | 0.915 | -178 | 2.00 | 49 | 0.011 | -24 | 0.807 | -170 |
| 450 | 0.924 | -178 | 1.71 | 45 | 0.010 | -25 | 0.821 | -170 |
| 500 | 0.930 | -179 | 1.48 | 41 | 0.010 | -26 | 0.838 | -171 |
| 550 | 0.928 | -180 | 1.28 | 37 | 0.009 | -26 | 0.851 | -171 |
| 600 | 0.937 | 180 | 1.13 | 33 | 0.008 | -25 | 0.865 | -172 |
| 650 | 0.944 | 179 | 1.00 | 30 | 0.007 | -22 | 0.878 | -172 |
| 700 | 0.943 | 178 | 0.88 | 27 | 0.008 | -14 | 0.888 | -173 |
| 750 | 0.946 | 178 | 0.81 | 25 | 0.008 | -15 | 0.895 | -173 |
| 800 | 0.949 | 177 | 0.73 | 22 | 0.009 | -17 | 0.906 | -174 |
| 850 | 0.954 | 177 | 0.67 | 20 | 0.009 | -28 | 0.912 | -175 |
| 900 | 0.953 | 175 | 0.61 | 18 | 0.007 | -34 | 0.919 | -175 |
| 950 | 0.957 | 175 | 0.56 | 15 | 0.005 | -32 | 0.927 | -176 |
| 1000 | 0.957 | 174 | 0.51 | 13 | 0.004 | -22 | 0.934 | -177 |
| 1050 | 0.957 | 174 | 0.48 | 10 | 0.004 | -11 | 0.939 | -178 |
| 1100 | 0.962 | 173 | 0.45 | 8 | 0.004 | -2 | 0.945 | -178 |
| 1150 | 0.959 | 172 | 0.41 | 7 | 0.004 | 3 | 0.950 | -179 |
| 1200 | 0.955 | 171 | 0.39 | 4 | 0.004 | 9 | 0.950 | -180 |
| 1250 | 0.962 | 170 | 0.36 | 2 | 0.004 | 13 | 0.955 | 180 |
| 1300 | 0.959 | 170 | 0.33 | 0 | 0.004 | 17 | 0.953 | 179 |
| 1350 | 0.956 | 169 | 0.31 | -1 | 0.004 | 25 | 0.954 | 178 |
| 1400 | 0.954 | 168 | 0.29 | -4 | 0.004 | 32 | 0.957 | 177 |
| 1450 | 0.955 | 168 | 0.28 | -6 | 0.004 | 46 | 0.952 | 177 |
| 1500 | 0.948 | 167 | 0.26 | -7 | 0.004 | 56 | 0.948 | 176 |

PACKAGE DIMENSIONS

| NOTES: | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|-----------|-------|-------------|-------|---|-----|--------|--|-------------|--|-----|-----|-----|-----|---|-------|-------|-------|-------|---|-------|-------|------|------|---|-------|-------|------|------|---|-------|-------|------|------|---|-------|-------|------|------|---|-------|-------|------|------|---|-----------|-------|-----------|------|---|-------|-------|------|------|---|-------|-------|------|------|---|-------|-------|------|------|---|-------|-------|------|------|
| 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2. CONTROLLING DIMENSION: INCH. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | <table border="1" style="margin-left: auto; margin-right: 0;"> <thead> <tr> <th rowspan="2">DIM</th> <th colspan="2">INCHES</th> <th colspan="2">MILLIMETERS</th> </tr> <tr> <th>MIN</th> <th>MAX</th> <th>MIN</th> <th>MAX</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>0.790</td> <td>0.810</td> <td>20.07</td> <td>20.57</td> </tr> <tr> <td>B</td> <td>0.220</td> <td>0.240</td> <td>5.59</td> <td>6.09</td> </tr> <tr> <td>C</td> <td>0.125</td> <td>0.175</td> <td>3.18</td> <td>4.45</td> </tr> <tr> <td>D</td> <td>0.205</td> <td>0.225</td> <td>5.21</td> <td>5.71</td> </tr> <tr> <td>E</td> <td>0.050</td> <td>0.070</td> <td>1.27</td> <td>1.77</td> </tr> <tr> <td>F</td> <td>0.004</td> <td>0.006</td> <td>0.11</td> <td>0.15</td> </tr> <tr> <td>G</td> <td>0.562 BSC</td> <td></td> <td>14.27 BSC</td> <td></td> </tr> <tr> <td>H</td> <td>0.070</td> <td>0.090</td> <td>1.78</td> <td>2.29</td> </tr> <tr> <td>K</td> <td>0.215</td> <td>0.255</td> <td>5.47</td> <td>6.47</td> </tr> <tr> <td>N</td> <td>0.350</td> <td>0.370</td> <td>8.89</td> <td>9.39</td> </tr> <tr> <td>Q</td> <td>0.120</td> <td>0.140</td> <td>3.05</td> <td>3.55</td> </tr> </tbody> </table> | DIM | INCHES | | MILLIMETERS | | MIN | MAX | MIN | MAX | A | 0.790 | 0.810 | 20.07 | 20.57 | B | 0.220 | 0.240 | 5.59 | 6.09 | C | 0.125 | 0.175 | 3.18 | 4.45 | D | 0.205 | 0.225 | 5.21 | 5.71 | E | 0.050 | 0.070 | 1.27 | 1.77 | F | 0.004 | 0.006 | 0.11 | 0.15 | G | 0.562 BSC | | 14.27 BSC | | H | 0.070 | 0.090 | 1.78 | 2.29 | K | 0.215 | 0.255 | 5.47 | 6.47 | N | 0.350 | 0.370 | 8.89 | 9.39 | Q | 0.120 | 0.140 | 3.05 | 3.55 |
| DIM | INCHES | | MILLIMETERS | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MIN | MAX | MIN | MAX | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| A | 0.790 | 0.810 | 20.07 | 20.57 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| B | 0.220 | 0.240 | 5.59 | 6.09 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| C | 0.125 | 0.175 | 3.18 | 4.45 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D | 0.205 | 0.225 | 5.21 | 5.71 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| E | 0.050 | 0.070 | 1.27 | 1.77 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| F | 0.004 | 0.006 | 0.11 | 0.15 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| G | 0.562 BSC | | 14.27 BSC | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H | 0.070 | 0.090 | 1.78 | 2.29 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| K | 0.215 | 0.255 | 5.47 | 6.47 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| N | 0.350 | 0.370 | 8.89 | 9.39 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Q | 0.120 | 0.140 | 3.05 | 3.55 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CASE 360B-01 ISSUE O (MRF183) | | | | | STYLE 1: PIN 1. DRAIN 2. GATE 3. SOURCE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | <table border="1" style="margin-left: auto; margin-right: 0;"> <thead> <tr> <th rowspan="2">DIM</th> <th colspan="2">INCHES</th> <th colspan="2">MILLIMETERS</th> </tr> <tr> <th>MIN</th> <th>MAX</th> <th>MIN</th> <th>MAX</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>0.370</td> <td>0.390</td> <td>9.40</td> <td>9.91</td> </tr> <tr> <td>B</td> <td>0.220</td> <td>0.240</td> <td>5.59</td> <td>6.09</td> </tr> <tr> <td>C</td> <td>0.105</td> <td>0.155</td> <td>2.67</td> <td>3.94</td> </tr> <tr> <td>D</td> <td>0.205</td> <td>0.225</td> <td>5.21</td> <td>5.71</td> </tr> <tr> <td>E</td> <td>0.035</td> <td>0.045</td> <td>0.89</td> <td>1.14</td> </tr> <tr> <td>F</td> <td>0.004</td> <td>0.006</td> <td>0.11</td> <td>0.15</td> </tr> <tr> <td>H</td> <td>0.057</td> <td>0.067</td> <td>1.45</td> <td>1.70</td> </tr> <tr> <td>K</td> <td>0.085</td> <td>0.115</td> <td>2.16</td> <td>2.92</td> </tr> <tr> <td>N</td> <td>0.350</td> <td>0.370</td> <td>8.89</td> <td>9.39</td> </tr> </tbody> </table> | DIM | INCHES | | MILLIMETERS | | MIN | MAX | MIN | MAX | A | 0.370 | 0.390 | 9.40 | 9.91 | B | 0.220 | 0.240 | 5.59 | 6.09 | C | 0.105 | 0.155 | 2.67 | 3.94 | D | 0.205 | 0.225 | 5.21 | 5.71 | E | 0.035 | 0.045 | 0.89 | 1.14 | F | 0.004 | 0.006 | 0.11 | 0.15 | H | 0.057 | 0.067 | 1.45 | 1.70 | K | 0.085 | 0.115 | 2.16 | 2.92 | N | 0.350 | 0.370 | 8.89 | 9.39 | | | | | | | | | | |
| DIM | INCHES | | MILLIMETERS | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MIN | MAX | MIN | MAX | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| A | 0.370 | 0.390 | 9.40 | 9.91 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| B | 0.220 | 0.240 | 5.59 | 6.09 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| C | 0.105 | 0.155 | 2.67 | 3.94 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D | 0.205 | 0.225 | 5.21 | 5.71 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| E | 0.035 | 0.045 | 0.89 | 1.14 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| F | 0.004 | 0.006 | 0.11 | 0.15 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H | 0.057 | 0.067 | 1.45 | 1.70 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| K | 0.085 | 0.115 | 2.16 | 2.92 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| N | 0.350 | 0.370 | 8.89 | 9.39 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CASE 360C-03 ISSUE B (MRF183S) | | | | | STYLE 1: PIN 1. DRAIN 2. GATE 3. SOURCE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Mfax is a trademark of Motorola, Inc.

How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution;
P.O. Box 5405, Denver, Colorado 80217. 1-303-675-2140 or 1-800-441-2447

JAPAN: Nippon Motorola Ltd.: SPD, Strategic Planning Office, 4-32-1, Nishi-Gotanda, Shinagawa-ku, Tokyo 141, Japan. 81-3-5487-8488

Customer Focus Center: 1-800-521-6274

Mfax™: RMFAX0@email.sps.mot.com – TOUCHTONE 1-602-244-6609
Motorola Fax Back System – US & Canada ONLY 1-800-774-1848 – <http://sps.motorola.com/mfax/>

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park, 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

HOME PAGE: <http://motorola.com/sps/>