Strippers, Cutters & Crimpers

8 5 7®

မ ပ

KLEIN TOOLS

5

 $\boldsymbol{\omega}$

¢ ()


KLEIN TOOLS

Manufactured with the needs of the professional tool user in mind, Klein strippers, cutters, and crimpers are designed to get jobs done with precision and quality.

Q

4 °

trippers, Cutters & Crimpers

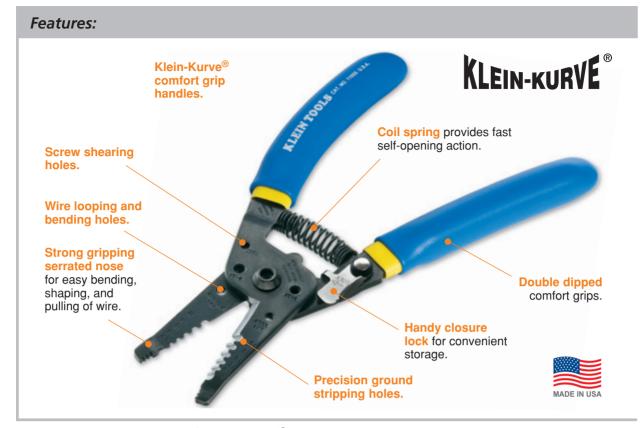

Wire Strippers/Cutters KLEIN-KURVE®

Additional Features:

- Easy-to-read markings.
- Precision shear-type blades.
- Cleanly shears 6-32 and 8-32 screws.



RLEIN TOOLS CAT NO ADAT ANA

K1412

Cat. No.	Handle Color	Overall Length	Strips and Cuts	Screw Shearing	Weight (lbs.)
11053	blue/red	7-1/8" (181 mm)	6 – 12 AWG stranded (10 mm ² – 2.5 mm ²)	6-32 & 8-32	.34
11055	blue/yellow	7-1/8" (181 mm)	10 - 18 AWG solid (4.0 mm ² 75 mm ²) & $12 - 20$ AWG stranded (2.5 mm ² 50 mm ²)	6-32 & 8-32	.34
11057	blue/red	7-1/8" (181 mm)	$20 - 30 \text{ AWG solid} (.50 \text{ mm}^214 \text{ mm}^2) \& 22 - 32 \text{ AWG stranded} (.34 \text{ mm}^205 \text{ mm}^2)$	6-32 & 8-32	.32

Dual NM Cable Strippers/Cutters KLEIN-KURVE®

Additional Features:

- 10/2, 12/2, and 14/2 stripping slots quickly remove outer jacket of Type NM-B nonmetallic-sheathed cable.
- Stripping holes easily remove insulation on 10, 12, and 14 AWG lead wire.
- Precision staggered blades for square, clean cuts on solid copper wire
- Narrow nose fits into tight places.
- Precision shear-type blades for square, clean cuts on solid copper wire

		1.00	
wire.			
r wire.	SOLID		

Cat. No.	Handle Color	Overall Length	Strips and Cuts	Type NM-B Cable	Screw Shearing	Weight (lbs.)
K1210	yellow/orange	7-3/4" (197 mm)	10 & 12 AWG solid (4.0 mm ² & 2.5 mm ²)	10/2 & 12/2	6-32 & 8-32	.43
K1412	yellow/white	7-3/4" (197 mm)	12 & 14 AWG solid (2.5 mm ² & 1.5 mm ²)	12/2 & 14/2	6-32 & 8-32	.41

All dimensions are in inches and (millimeters).

AWARNING: NOT insulated. Plastic-dipped or slip-on plastic handles are NOT intended for protection against electrical shock.

AWARNING: Never use on or near live electrical circuits.

AWARNING: Always wear approved eye protection.





QTR-Turn[™] NM Cable Stripper/Cutter KLEIN-KURVE[®] KLEIN TOOLS -Additional Features: ■ Exclusive QTR-TURN™* technology to guickly remove outer jacket of NM Cable. Strips, cuts, and loops 12 & 14 AWG solid wire. • Cleanly shears 6-32 and 8-32 screws. • Serrated nose bends, shapes, and pulls wire. K1412-3 . . Weight (lbs.) earing 3-32 .41

Cat. No.	Handle Color	Overall Length	Strips and Cuts	Type NIN Cable	Screw Snea
K1412-3	yellow/blue	7-3/4" (197 mm)	12 & 14 AWG solid (2.5 mm ² & 1.5 mm ²)	12/3 & 14/3	6-32 and 8-3
OTB TUBN TM	is a trademark of Stride	Tool Incornorated *nat	ent nendina		

Bent Nose NM Romex[®] Cable Stripper/Cutters KLEIN-KURVE[®]

Additional Features:

- Patented 90° bent nose for easy work in confined spaces.
- Quickly removes outer jacket of Romex[®] Cable.
- Strips, cuts, and loops 10, 12 or 14 AWG solid wires.
- Cleanly shears 6-32 & 8-32 screws.
- Serrated nose bends, shapes, and pulls wire.



K90-12/2

1412

Weight

(lbs.)

.39

KLEIN TOOLS WAT

KLEIN TOOLS

Screw

Shearing

6-32 & 8-32

Cat. No.	Handle Color	Overall Length	Strips and Cuts	Type NM Cable	Screw Shearing	Weight (lbs.)
K90-10/2	yellow/orange	7-3/8" (187 mm)	10 AWG solid (4.0 mm ²)	10/2	6-32 and 8-32	.41
K90-12/2	yellow/yellow	7-3/8" (187 mm)	12 AWG solid (2.5 mm ²) & 18 AWG stranded (1.0 mm ²)	12/2	6-32 and 8-32	.41
K90-14/2	yellow/white	7-3/8" (187 mm)	14 AWG solid (1.5 mm ²) & 18 AWG stranded (1.0 mm ²)	14/2	6-32 and 8-32	.41

Handle

Color

vellow

Cat.

No.

1412

Overall

Length

(200 mm

7-7/8

Strips and Cuts

12 & 14 AWG solid

(2.5 mm² & 1.5 mm²)

Romex[®] is a registered trademark of Southwire Company.

Dual NM Cable Stripper/Cutter

- 12/2 and 14/2 stripping slots quickly remove outer jacket of Type NM-B nonmetallic-sheathed cable.
- Cushion grip handles provide comfort.
- Precision-ground stripping holes easily remove insulation on 12 and 14 AWG lead wires.
- Strong-gripping serrated nose; easy bending, shaping and pulling of wire.
- Narrow nose fits into tight places.
- Precision shear-type blades for square, clean cuts on solid copper wire.
- Holes for quick wire looping and bending.
- 6-32 and 8-32 screw-shearing holes.
- Spring-loaded for self-opening action.
- Handy closure lock for convenient storage.

Type NM Cable Strippers/Cutters

- Patented stripping slot guickly removes outer jacket of Type NM-B nonmetallic-sheathed cable.
- Handle grips with cushion ridges provide comfort.
- Precision-ground stripping hole easily removes insulation on lead wires.
- Serrated nose easily bends, shapes, or pulls wire.
- Narrow nose fits into tight places.
- Shear-type steel blades for square, clean cuts on solid copper wire.
- Spring-loaded for self-opening action.
- Handy closure lock for convenient storage.
- Holes for looping and bending wire.
- Handle tip identifies size of cable.

All dimensions are in inches and (millimeters).

AWARNING: NOT insulated. Plastic-dipped or slip-on plastic handles are NOT intended for protection against electrical shock.



Type NM-B

12/2 & 14/2

Cable

Cat. No.	Handle Color	Overall Length	Strips and Cuts	Type NM-B Cable	Weight (lbs.)
1012	yellow/grey with marking 12/2 at tip	6-1/4" (159 mm)	12 AWG solid (2.5 mm²)	12/2	.26
1014	yellow/white with marking 14/2 at tip	6-1/4" (159 mm)	14 AWG solid (1.5 mm²)	14/2	.26


AWARNING: Never use on or near live electrical circuits.

AWARNING: Always wear approved eye protection.

rs, Cutters &





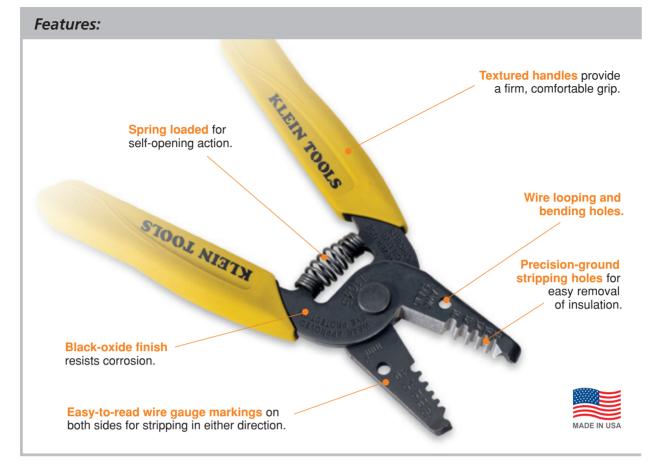

Wire Strippers/Cutters

Additional Features:

- Compact, lightweight wire-stripping and cutting tools.
- Narrow nose fits into tight places.
- Hardened steel with precision ground stripping holes.
- Do not use for cutting steel wire or bolts.

Cat. No.	Handle Color	Overall Length	Strips and Cuts	Weight (lbs.)
11045	yellow	6-1/4" (159 mm)	10-18 AWG solid (4.0 mm ² 75 mm ²)	.27
11046	red	6-1/4" (159 mm)	16 – 26 AWG stranded (1.0 mm ² – .14 mm ²)	.27
11047	yellow	6-1/4" (159 mm)	22 – 30 AWG solid (.34 mm ² – .05 mm ²)	.27
11049	red	6-1/4" (159 mm)	8 - 16 AWG stranded (6 mm ² - 1.0 mm ²)	.27

Strips and Cuts

10, 12, 14 AWG solid (4.0 mm², 2.5 mm², 1.5 mm²)

Dual-Wire Stripper/Cutter

Additional Features:

Cat. No.

11048

- Strips two wires in a single motion.
- Paired stripping holes for 14 and 12 AWG solid wire.
- One stripping hole for 10 AWG solid wire.
- Shear-type cutting blades for square, clean cuts.
- Narrow nose fits into tight places.

All dimensions are in inches and (millimeters).

Handle Color

yellow

• Hardened steel with precision ground stripping holes.

Overall Length

6-1/4" (159 mm)





KLEIN TOOLS

KLEIN TOOLS

11045






AWARNING: Never use on or near live electrical circuits.

.27

AWARNING: NOT insulated. Will NOT protect against electrical shock.

AWARNING: Always wear approved eye protection.

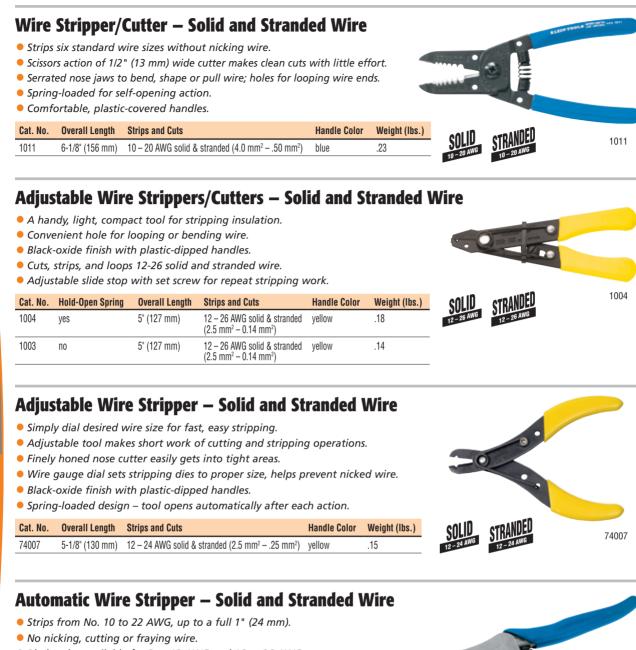

- Blades also available for 8 to 12 AWG and 16 to 26 AWG.
- Wire is automatically gripped and stripped with the same motion. Release pressure and jaws automatically open to release stripped wire. For clear nylon-jacket conductors, two activations are required.
- Plastic hand grips for comfort.
- Supplied with adjustable wire stop as standard feature, to assure uniform, precise strip length.

Cat. No.	Overall Length	Strips and Cuts	Handle Color	Weight (lbs.)			
11062	7" (178 mm)	10 – 22 AWG (4.0 mm ² – .34 mm ²)	blue	.76			
Replaceme	nt Blades (Pair)						
11070		8 - 12 AWG (6.0 mm ² - 2.5 mm ²)		.01			
11072		10 - 22 AWG (4.0 mm ² 34 mm ²)		.01			
11075		16 – 26 AWG (1.0 mm ² – .14 mm ²)		.01			
Replacement Adjustment Wire Stop							
11080							



All dimensions are in inches and (millimeters)

AWARNING: NOT insulated. Plastic-dipped or slip-on plastic handles are NOT intended for protection against electrical shock.

AWARNING: Never use on or near live electrical circuits.

AWARNING: Always wear approved eye protection.

Strippers, Cutters & Crimpers

EST 1857

Automatic Wire Stripper – Solid and Stranded Wire

- Precision blades strip wire without nicking or fraying.
- Fine insulation can be stripped without damage to the conductor.
- To strip, place wire in proper size stripping hole and squeeze handles. Wire is automatically gripped and stripped with the same motion. Release pressure and jaws automatically stay open for removing cleanly stripped wire without crushed end.
- Adjustable wire stop assures uniform stripping lengths.
- Gripper pads firmly hold the Tefzel[®] and Teflon[®] wire and prevent damage to the thin insulation.
- Plastic hand grips for comfort.

Strips Tefzel[®] and Teflon[®] insulation from 16-26 AWG solid and stranded wire.

Applications: Tefzel[®] insulated wire. Type-E Teflon[®] insulated wire. Type-EE Teflon[®] insulated wire.



Cat. No.	Length	Handle Color	Strips	Weight (lbs.)
11065	7" (178 mm)	red	16 - 26 AWG solid or stranded (1.0 mm ² – .14 mm ²)	.81

Tefzel[®] and Teflon[®] are registered trademarks of E.I duPont de Nemours and Company.

Combination Wire-Stripping and Cutting Tools

 Cleanly Easily cu Measure Gauges Crimps i 	Purpose 6-in- shears bolts. Its and strips wire. es stud sizes. wire sizes. insulated terminals. overed cushioned ha			(A) C (A) (A) C (A)	e entre ar un cacuto 1000	Crimpers &
Cat. No.	Overall Length	Strips and Cuts	Bolt Sizes	Handle Color	Weight (lbs.)	
1000	7-3/4" (197 mm)	10 – 22 AWG (4.0 mm ² – .34 mm ²)	4-40, 6-32, 8-32, 10-24, 10-32	red	.44	
 Crimps 7 Cleanly 7 Pivot nu Wire-loc 	nded crimping dies f d and non-insulated 7-8 mm auto ignition shears bolts. It adjusts tension. oping holes near tip. d, plastic-covered cu	n terminals. 8-18 AWB 10-22 A			1001	
Cat. No.	Overall Length	Strips and Cuts	Bolt Sizes	Handle Color	Weight (lbs.)	1001
1001	8-1/2" (216 mm)	8 – 18 AWG solid (6.0 mm ² – 1.0 mm ²) 10 – 22 AWG stranded (4.0 mm ² – .34 m	4-40, 6-32, 8-32, 10-24, 10-33 m ²)	2 red	.47	
 Crimps i Crimps i Easily cu Cleanly Wire cu Plastic-cu 	7 mm ignition and d Its and strips wire. shears bolts. tter in nose. overed cushioned h	sulated terminals, lugs and splices listributor terminals. andles for comfort.			And the second of the Concert Manual House Concert 1002	
Cat. No.	Overall Length	Strips and Cuts	Bolt Sizes	Handle Color	Weight (lbs.)	
1002	8-1/2" (216 mm)	10 – 22 AWG (4.0 mm ² – .34 mm ²)	4-40, 6-32, 8-32, 10-24, 10-32	red	.46	

All dimensions are in inches and (millimeters).

AWARNING: NOT insulated. Plastic-dipped or slip-on plastic handles are NOT intended for protection against electrical shock **AWARNING:** Never use on or near live electrical circuits.

AWARNING: Always wear approved eye protection.



Combination Wire-Stripping and Cutting Tools

Long-Nose Multi-Purpose Tool

- Easily cuts and strips wire.
- Narrow, serrated pliers nose to pull, loop, and bend wire.
- Long, curved cutting blade.
- Cutters and strippers are in front of the pivot for maximum ease-of-use in reaching into tight places.
- Crimps insulated and non-insulated terminals and 7 to 8 mm ignition terminals.
- Cleanly shears bolts.
- Plastic-covered cushioned handles for comfort.

Cat. No.	Overall Length	Bolt Sizes	Strips and Cuts	Connectors	Handle Color	Weight (lbs.)
1010	8-1/4" (210 mm)	4-40, 5-40, 6-32, 8-32, 10-32, 10-24	10 – 22 AWG (4.0 mm ² – .34 mm ²)	10 – 22 gauge	blue	.43

Trip-Saver[®]

- Unique multi-tool addresses the special needs of electricians and maintenance professionals while providing many other features handy on any job.
- Compact, lightweight, and very sturdy.
- Produced from high-carbon, rust-resistant stainless steel.
- Specially designed locking "L" handle snaps securely into the "L" channel, locking the fully opened blade or implement in place during use.
- Features the following: Needle-Nose Pliers, Beveled Wire Cutter, Toothed Pipe Grippers, Files (coarse and fine), 5-Slot Wire Stripper (10-18) AWG, Wire-Looping Hole, Scraper, Awl/Reamer, Serrated Sheepsfoot Knife, Clip-Point Knife, Standard/Metric Ruler, Drywall Saw, Locking "L" Handle, #1 and #2 Phillips Hex Bits, Small-Slotted Hex Bit, Large-Slotted Hex Bit, 1/4" Socket Adapter, Lanyard Hole, Nylon Pouch.

AWARNING: Close handles to lock blade in place before use.

NM Cable Ripper

NM Cable Ripper

- Easy-to-use cable ripper.
- Slit the outer jacket of Romex[®] cable (all sizes) and other
- nonmetallic (type NM) sheathed cable.
 Measure conductor wire gauge.
- **Crimping Tools**

Crimping/Cutting Tools – Non-Insulated/Insulated Terminals

- Crimping die marked for insulated and non-insulated solderless terminals and connectors.
- Tapered nose design for working in confined spaces.
- Specially hardened wire cutter in nose.
- Hot-riveted joint for smooth action and no handle wobble.



Cat. No.	Handle Color	Crimps	Overall Length	Weight (lbs.)				
1005	red	10 – 22 AWG	9-3/4" (248 mm)	.80				
Journeyn	Journeyman Series – Dual-material handles							
J1005	red/black	10 – 22 AWG	9-3/4" (248 mm)	.84				

AWARNING: Never use on or near live electrical circuits.

AWARNING: Always wear approved eye protection.

 Cat. No.
 Overall Length
 Weight (lbs.)

 1016
 5-3/4" (143 mm)
 .95

out. No.	oronan zongen	Holgin (190.)				
1016	5-3/4" (143 mm)	.95				
Replacement pouch with bit holder (no bits)						
1016RP		.45				

Cat. No. Overall		Slits	Measures	Weight
Length			Wire Gauge	(lbs.)
74017	4" (102 mm)	all sizes of Romex [®] and NM	8 – 14 AWG (6 mm² – 1 mm²)	.08

Romex[®] is a registered trademark of Southwire Company.

All dimensions are in inches and (millimeters)

AWARNING: NOT insulated. Plastic-dipped or slip-on plastic handles are NOT intended for protection against electrical shock.



52



ers, Cutters &



1010

1	
	A WARNING:
KLEN TOOL	NM Ca

Crimping Tools

Overall Length

9-3/4" (248 mm)

1006

Weight (lbs.)

T1715

T1710

T1720

Weight (lbs.)

1.29

Weight (lbs.)

1.05

.85

Crimping/Cutting Tool – Non-Insulated Terminals

- Designed for crimping non-insulated solderless terminals and connectors.
- Specially hardened wire cutter in nose.
- Tapered nose for working in confined spaces.
- Plastic-dipped cushioned handles for comfort.

Large Crimp Tool – Compound-Action

- Crimps #6-4/0 AWG battery lugs and terminals.
- Ultra-comfortable hand grips for easy use.
- All-in-one, integral crimp nest.No removable parts or rotating dies.
- High-leverage handles and compound-action mechanism for superior mechanical advantage.
- Adjustment screw allows user to control crimp depth.

Cat. No.	Crimps	Handle Color	Overall Length	Weight (lbs.)
2006	#6 – 4/0 AWG battery lugs and terminals	red	19-1/2" (495 mm)	3.80

Cat. No.

T1715

Cat. No

T1710

Handle Color

Handle Color

black

black

Crimps

10 - 22 AWG

Crimps

10 - 22 AWG

Cat. No

1006

Handle Color

black

Crimps

10 - 22 AWG

Ratcheting Crimpers

Overall Length

Overall Length

9" (229 mm)

9" (229 mm)

Full-Cycle Ratcheting Crimper – Insulated Terminals

- Crimps insulated terminals in wire sizes 22-16 (front cavity), 16-14 (middle cavity), and 12-10 (rear cavity).
- Color-coded wire size markings.
- Compound lever-action of narrow-span handles puts more crimping power into each squeeze.
- Comfort-grip plastic handles.

Compound-Action Ratcheting Crimper – Insulated Terminals

- Compound-action tool crimps 10-22 AWG insulated terminals to meet or exceed MIL-SPEC pull-out tests.
- Built-in ratchet with safety release assures uniform crimps every time.
- Compound lever-action of narrow-span handles puts more crimping power into each squeeze.
- Special locator quickly positions terminal for double crimp.
- Comfort-grip plastic handles.

Full-Cycle Coax Ratcheting Crimper

- Crimps hex-configuration
- (in dimensions across flats) coaxial connectors.
- Dimensions clearly marked for quick identification.
- Front cavity (.262") for RG-59.
- Middle cavity (.324") for RG-5, 6, 21, 143, 212, 222, and 304, also for Belden 8281, 9231 and 9141.
- Rear cavity (.384") for RG-8, 9, 11, 149, and 213.
- Ratchet release allows quick removal of incorrectly placed connector prior to completing crimp.
- Compound lever-action of narrow-span handles puts more crimping power into each squeeze.
- Comfort-grip plastic handles.
- Tool jaws will not open until the crimp is completed. They release and open automatically when crimp is done.

All dimensions are in inches and (millimeters).

AWARNING: NOT insulated. Plastic-dipped or slip-on plastic handles are NOT intended for protection against electrical shock.

T1720	black	front cavity .262"; middle cavity .324"; rear cavity .384"	9" (229 mm)	1.30

Cat. No. Handle Color Hex Configurations Overall Length Weight (lbs.)

AWARNING: Never use on or near live electrical circuits.

AWARNING: Always wear approved eye protection.



trippers, Cutt



ROFESSIONA

(1)

ssionals Are Known By The Too

You're a professional because you've earned it. Years of training and experience are what set you apart from the others. You're the reason Klein Tools is in business. Our tools are made *for* professionals, *by* professionals. That's why it's the brand of choice.

KLEIN TOOLS or Professionals... Since 1857°

colnshire, IL U w.kleintools.co

4 LE /4 EST. 1857