

# FA5301BP(N)

查询FA5301供应商

捷多邦，专业PCB打样工厂，24小时加急出货  
Bipolar IC  
For Switching Power Supply Control

## ■ Description

The FA5301BP(N) is a bipolar IC containing basic circuits necessary for PWM-type switching power supply control. This IC switches an external transistor according to external synchronizing pulses.

## ■ Features


- External synchronization input terminal
- Wide supply voltage range ( $V_{CC} = 7$  to 22V)
- Open-collector output
- Soft-start from standby mode
- Double protection of output transistor by overcurrent limiting and cutoff functions
- Output ON/OFF control function
- Not many external discrete components needed

## ■ Applications


- Switching power supply for general equipment  
(Optimum for TV, display, and other monitor devices)

## ■ Dimensions, mm


### • SOP-16

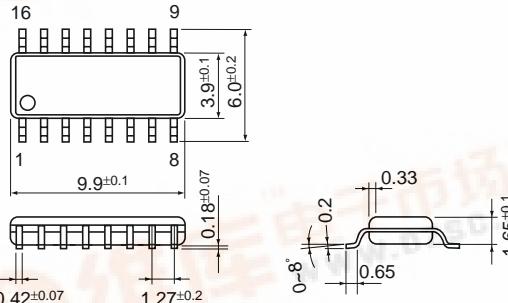

### • DIP-16

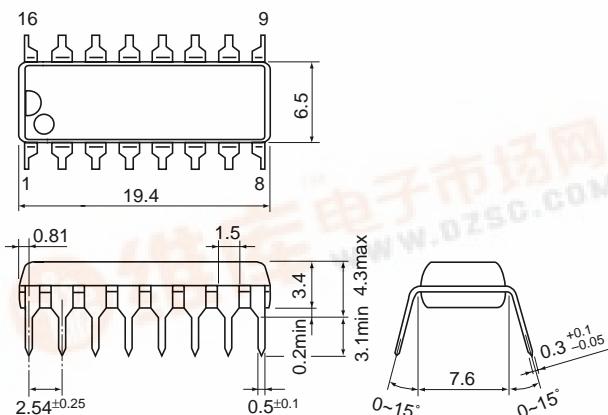

## ■ Block diagram

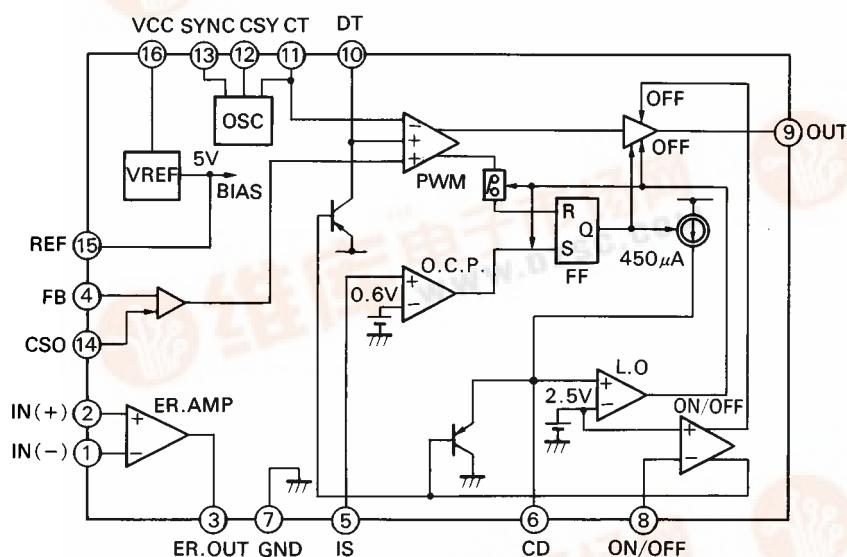

Pin No.	Pin symbol	Description
1	IN (-)	Inverting input to error amplifier
2	IN (+)	Non-inverting input to error amplifier
3	ER.OUT	Error amplifier output
4	FB	Feedback input
5	IS	Overcurrent detection
6	CD	Overcurrent cutoff delay capacitor
7	GND	Ground
8	ON/OFF	Output ON/OFF control
9	OUT	Output
10	DT	Dead time adjustment
11	CT	Oscillator timing capacitor
12	CSY	External synchronizing signal detection capacitor
13	SYNC	External synchronization input
14	CSO	PWM soft-start capacitor
15	REF	Reference voltage output (5V)
16	VCC	Power supply

## ■ Absolute maximum ratings

Item	Symbol	Rating	Unit
Supply voltage	Vcc	22	V
Output voltage	Vo	22	V
Error amplifier output current	Iom	5	mA
Error amplifier input voltage	Vi	5	V
Overcurrent detection terminal input voltage	Vis	20	V
Feedback terminal input voltage	VFB	20	V
Output ON/OFF terminal input voltage	VON/OFF	6	V
Synchronizing terminal input voltage	VSYNC	6	V
Total power dissipation	Pd	1000 (DIP-16) *1 400 (SOP-16) *2	mW
Operating temperature	Topr	-20 to +85	°C
Storage temperature	Tstg	-40 to +150	°C

## ■ Recommended operating conditions

Item	Symbol	Min.	Max.	Unit
Supply voltage	Vcc	7	20	V
Error amplifier input voltage	Vi	0	VREF-2	V
Output current	Io		20	mA
Error amplifier feedback resistor	RNF	33		kΩ
Oscillator timing capacitor	C <sub>T</sub>	100	10,000	pF
Oscillator timing resistor	R <sub>T</sub>	8.2	220	kΩ
Free run oscillation frequency	fosc	1	200	kHz
Synchronized frequency	f <sub>SYNC</sub>	1	200	kHz
Frequency ratio	CSY=OV	-35	-5	%
$\frac{f_{\text{osc}} - f_{\text{SYNC}}}{f_{\text{SYNC}}}$	CSY: Capacitor is connected to GND	-30	+10	%

## Notes:

\*1 Derating factor Ta &gt; 25°C : 10.0mW/°C (on PC board)

\*2 Derating factor Ta &gt; 25°C : 4.0mW/°C (on PC board)

\*3 Consider the tolerance of

 $\frac{f_{\text{osc}} - f_{\text{SYNC}}}{f_{\text{SYNC}}}$ 

## ■ Electrical characteristics (Ta = 25°C, Vcc = 9V, RT = 47kΩ, CT = 1000pF)

### Reference voltage section

Item	Symbol	Test condition	Min.	Typ.	Max.	Unit
Output voltage	V <sub>REF</sub>	I <sub>OR</sub> = 1mA	4.75	5.00	5.25	V
Line regulation	L <sub>INE</sub>	V <sub>CC</sub> = 8 to 20V		10	25	mV
Load current regulation	L <sub>OAD</sub>	I <sub>OR</sub> = 0.1 to 2mA		10	25	mV
Output voltage variation by temperature fluctuation	V <sub>TC1</sub>	T <sub>a</sub> = -20 to +25°C		1		%
	V <sub>TC2</sub>	T <sub>a</sub> = +25 to +85°C		1		%
Output current at output short-circuit	I <sub>OS</sub>			25		mA

### Oscillator section

Item	Symbol	Test condition	Min.	Typ.	Max.	Unit
Oscillation frequency	fosc	C <sub>T</sub> = 1,000pF, R <sub>T</sub> = 47kΩ	20	21	22	kHz
Frequency variation by line voltage fluctuation	f <sub>dV</sub>	V <sub>CC</sub> = 8 to 20V			2	%
Frequency variation by temperature fluctuation	f <sub>dt1</sub>	T <sub>a</sub> = +25 to -20°C	-2		+2	%
	f <sub>dt2</sub>	T <sub>a</sub> = +25 to +85°C	-2		+2	%
Input current to synchronizing signal terminal	I <sub>SYNC1</sub>	V <sub>SYNC</sub> = 1V		300	600	μA
	I <sub>SYNC2</sub>	V <sub>SYNC</sub> = -0.5V		-60	-300	μA
Input current to synchronizing signal detection terminal	I <sub>C<sub>SY</sub>1</sub>	Pin 12 = 0V, V <sub>SYNC</sub> = -0.5V	-65	-130	-260	μA
	I <sub>C<sub>SY</sub>2</sub>	Pin 12 = 1V, V <sub>SYNC</sub> = 1V		200	400	μA
Threshold voltage of synchronizing signal detection terminal	V <sub>TH CSY</sub>			0.7	1.0	V

### Error amplifier section

Item	Symbol	Test condition	Min.	Typ.	Max.	Unit
Input offset voltage	V <sub>IO</sub>		-10		10	mV
Input bias current	I <sub>I</sub>			1		μA
Common-mode input voltage	V <sub>CM</sub>		0		V <sub>REF</sub> -2	V
Open-loop voltage gain	A <sub>V</sub>		70	95		dB
Unity-gain bandwidth	G <sub>B</sub>			0.8		MHz
Common-mode signal rejection ratio	CMRR			80		dB
Maximum output voltage	V <sub>OM+</sub>	I <sub>OM</sub> = -50μA		4		V
	V <sub>OM-</sub>	I <sub>OM</sub> = 50μA			0.5	V
Output sink current	I <sub>OM-</sub>	V <sub>OM</sub> = 1V	170	240		μA

## FA5301BP(N)

---

### PWM comparator section

Item	Symbol	Test condition	Min.	Typ.	Max.	Unit
Input bias current (Pin 4)	$I_{BFB}$	$V_{FB} = 1V$		-2.0	-10.0	$\mu A$
Input threshold voltage (Pin 4)	$V_{TH0}$	Duty cycle = 0%		3.3		V
	$V_{TH100}$	Duty cycle = 100%		0.2		V
Soft-start signal pin input current	$I_{CSO}$	Pin 14 = 3V, $V_{FB} = 0V$		2.0	10.0	$\mu A$

### Dead time adjustment circuit section

Item	Symbol	Test condition	Min.	Typ.	Max.	Unit
Input bias current	$I_{BDT}$	Pin 10 = 1V		-0.5	-5	$\mu A$
Input threshold voltage	$V_{TH DT0}$	Duty cycle = 0%		3.2		V
	$V_{TH DT100}$	Duty cycle = 100%		0.1		V
Reset saturation voltage	$V_{SAT RS}$	Pin 10 = -100 $\mu A$		0.25	0.8	V

### Overcurrent limiting circuit section

Item	Symbol	Test condition	Min.	Typ.	Max.	Unit
Input bias current (Pin 5)	$I_{BIS}$	$V_{IS} = 0.3V$			-1	$\mu A$
Input threshold voltage (Pin 5)	$V_{TH IS}$		0.5	0.6	0.7	V
Source current of overcurrent cutoff terminal	$I_{O CD}$	Pin 6 = 0V, $V_{IS} = 1V$		-450	-700	$\mu A$
Latch-mode threshold voltage	$V_{TH LA}$		1.8	2.2	2.6	V
Reset saturation voltage (Pin 6)	$V_{SAT RS}$	Pin 6 = 100 $\mu A$ , $V_{IS} = 0V$		0.75	1.0	V

### Output section

Item	Symbol	Test condition	Min.	Typ.	Max.	Unit
Output leakage current	$I_{LEAK}$	$V_o = 22V$ , output OFF			10	$\mu A$
L-level output voltage	$V_{OL}$	$I_o = 10mA$		0.4	0.7	V
Output sink current limit	$I_{SINK}$	$V_o = 3V$	25	40	55	mA

### Output ON/OFF control circuit section


Item	Symbol	Test condition	Min.	Typ.	Max.	Unit
Input bias current (Pin 8)	$I_{BON}$	Pin 8 = 0V		-60	-300	$\mu A$
OFF-to-ON threshold voltage	$V_{TH ON}$	OFF→ON	2.13	2.50	2.87	V
ON-to-OFF threshold voltage	$V_{TH OFF}$	ON→OFF	1.96	2.30	2.64	V
Voltage hysteresis	$V_{HYS}$			0.2		V

### Overall device


Item	Symbol	Test condition	Min.	Typ.	Max.	Unit
Supply current	$I_{CC LA}$	$R_T = 47k\Omega$ , latch mode		8.0	12.0	mA
Operating-state supply current	$I_{CC AV}$	$R_T = 47k\Omega$ , duty cycle = 50%		6.5	9.8	mA

■ Characteristic curves ( $T_a = 25^\circ\text{C}$ )


Oscillation frequency ( $f_{\text{osc}}$ ) vs. timing resistor resistance ( $R_T$ )

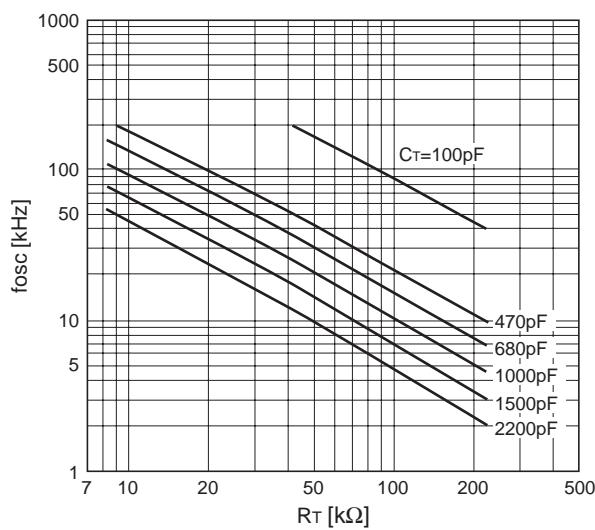


Output duty cycle vs. DT terminal voltage ( $V_{DT}$ )

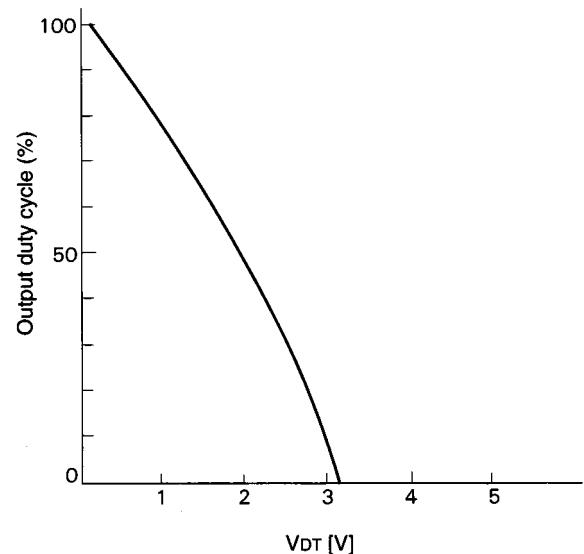


Output duty cycle vs. FB terminal voltage ( $V_{FB}$ )

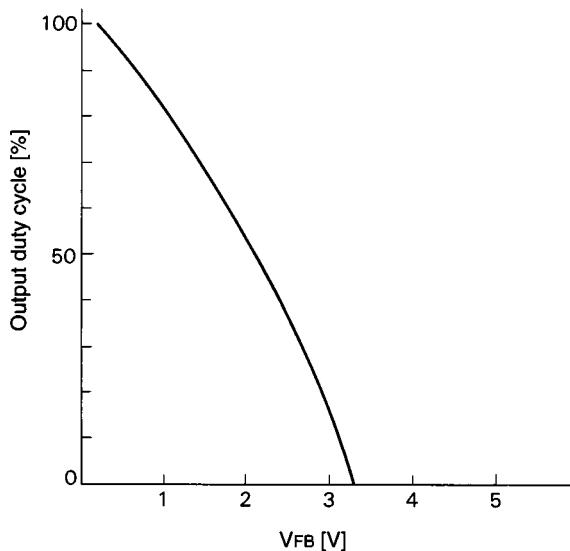


L-level output voltage vs. output sink current ( $I_{SINK}$ )

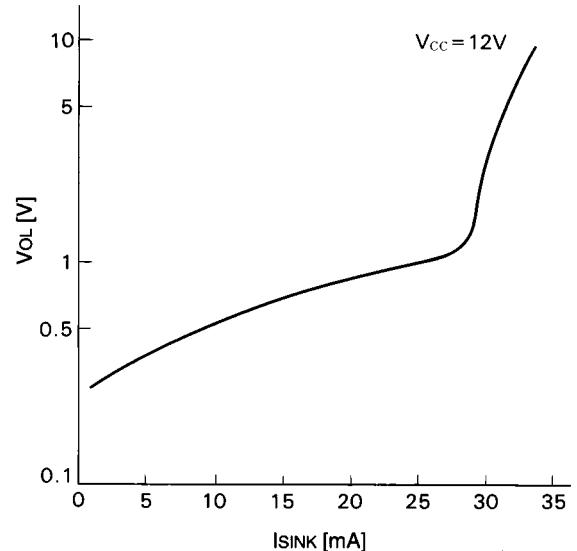

Supply current ( $I_{CC}$ ) vs. supply voltage ( $V_{CC}$ )

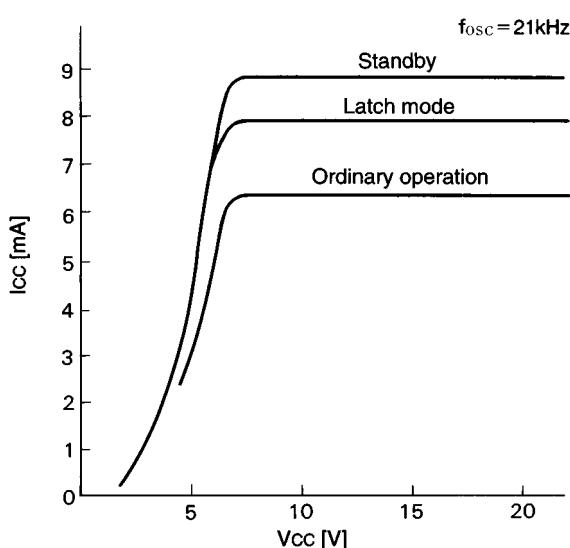


Error amplifier frequency ( $f$ ) vs. voltage gain( $A_v$ )/ phase ( $\theta$ )

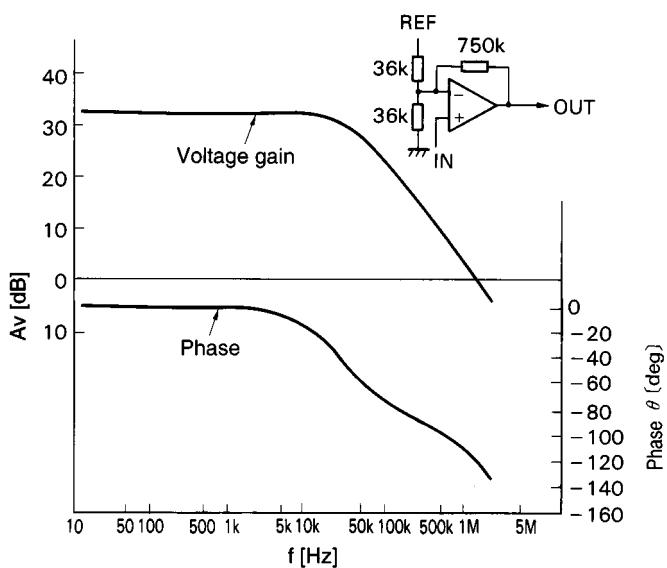

## FA5301BP(N)

### ■ Application circuit

- Switching power supply (primary current control and insulated output type)

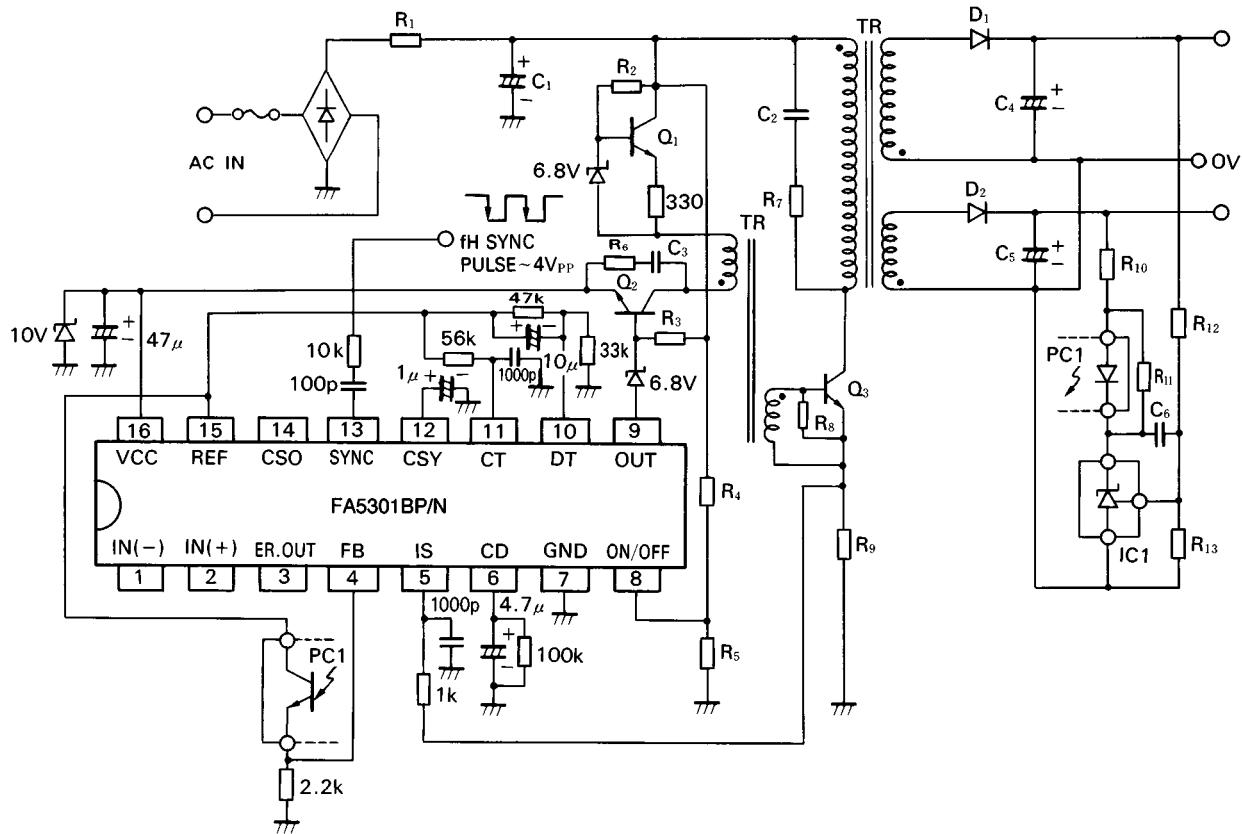

This circuit uses the following functions.

- Horizontal synchronizing function
- Overcurrent limiting function
- Overcurrent cutoff function
- Undervoltage input cutoff function
- Soft-start function

*Parts tolerances characteristics are not defined in the circuit design sample shown above. When designing an actual circuit for a product, you must determine parts tolerances and characteristics for safe and economical operation.*