



查询FTR-B2供应商

THE POSSIBILITIES ARE INFINITE

捷多邦 专业PCB打样工厂, 24小时加急出货

# 4 POLE (2 FORM C+ 2 FORM A) SIGNAL RELAY FOR CENTRAL SWITCHING/ DATA TRANSMISSION

FTR-B2 Series

RoHS Compliant

## ■ FEATURES

- 4 POLE MINIATURE RELAY  
Mounting space of 175mm<sup>2</sup> with 4 pole relay, suitable for high density mounting.
- SAFETY STANDARD  
- UL/CSA recognized  
- Conforms to Bellcore specification & FCC part 68  
- Conforms to IEC 60950 / UL1950 / EN60950 spacing and high breakdown voltage  
    Clearance: 1.0mm  
    Creepage: 1.6mm
- HIGH RELIABILITY  
Bifurcated gold overlay silver alloy
- HIGH HEAT RESISTANCE, FLAMMABILITY  
Flammability grade of 94V-0 materials employed
- AIR TIGHT CONSTRUCTION  
Air tight construction allows high resistance to various environments and to clean the relay
- SMT VERSION  
Surface mount type available on request
- RoHS compliant since date code: 0430B8  
Please see page 7 for more information



## ■ ORDERING INFORMATION

[Example] FTR-B2 (a) M (b) A (c) 012 (d) Z (e) -\*\* (f)

(a)	Series Name	FTR-B2
(b)	Contact Arrangement	M : 2 Form C + 2 Form A - through hole N: 2 Form C + 2 Form A - SMT
(c)	Coil Type	A : Standard (400mW)
(d)	Coil Nominal Voltage	4.5: 4.5VDC 012: 12VDC
(e)	Contact Material	Z : Gold overlay silver alloy
(f)	Custom Designation	Special Number for Customized Products

Remarks: Actual marking on relay would not carry code FTR and be as below:

Code: 0430B8 012 12VDC A 400mW



# FTR-B2 Series

## ■ SAFETY STANDARD AND FILE NUMBERS

UL508, 1950 (File No. E63615)

C22.2 No. 14, No. 950 (File No. LR40304)

Please request when the approval markings are required on the cover.

Nominal voltage	Contact rating		
4.5 to 12 VDC	0.2 A	125 VAC	
	1 A	30 VDC	— resistive
	0.3 A	110 VDC	

Clearance	Creepage	Remarks
1.0mm coil a- contacts	1.6mm coil - contacts	- working voltage: 150V - relay inside and outside - pollution degree "2"

## ■ COIL DATA CHART

MODEL	Nominal Voltage	Coil Resistance	Operate Voltage	Release Voltage	Nominal Power
FTR-B2 ( ) A4.5Z	4.5VDC	50Ω	3.38VDC	0.45VDC	400mw
FTR-B2 ( ) A012Z	12VDC	355Ω	9.0VDC	1.2VDC	400mw






# FTR-B2 Series

## ■ SPECIFICATIONS




Item	FTR-B2 Series	
Contact	Arrangement	2 Form C + 2 Form A
	Material	Gold overlay Silver alloy
	Resistance (initial)	Maximum 75mΩ (at 1A 6VDC)
	Rating (resistive)	30VDC 1A / 125VAC 0.2A
	Maximum Switching Power	30W / 25VA
	Maximum Switching Voltage	110VDC / 125VAC
	Maximum Switching Current	1A
	Maximum Carrying Current	1.25A
Time Value	Operate Time (at nominal voltage)	Maximum 10ms
	Release Time (at nominal voltage)	Maximum 5ms
Coil	Operating Temperature	-40° C to +85° C (no frost)
Insulation	Resistance (at 500VDC)	Minimum 1,000 MΩ
	Dielectric Strength	750 VAC 1 Min. (open contacts) 500 VAC 1 Min. (adjacent contacts) 1,500 VAC 1 Min. (coil-contacts)
Life	Mechanical	10 x 10 <sup>6</sup> operations minimum
	Electrical	50 x 10 <sup>3</sup> operations minimum at 30VDC 1A 100 x 10 <sup>3</sup> operations minimum at 125VDC 0.2A
Vibration	Misoperation	10-55 Hz (double amplitude of 1.5mm)
	Endurance	10-55 Hz (double amplitude of 1.5mm)
Shock	Misoperation	100m/s <sup>2</sup> (11±1ms)
	Endurance	500m/s <sup>2</sup> (6±1ms)
Weight		Approximately 3.9g

# FTR-B2 Series

## ■ CHARACTERISTIC DATA

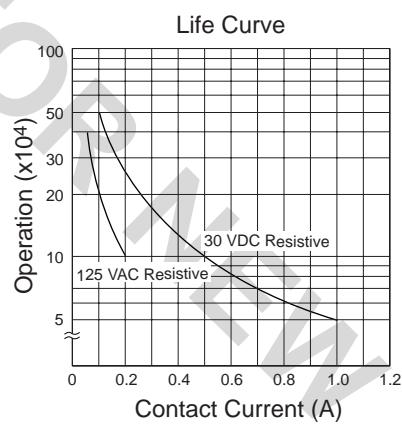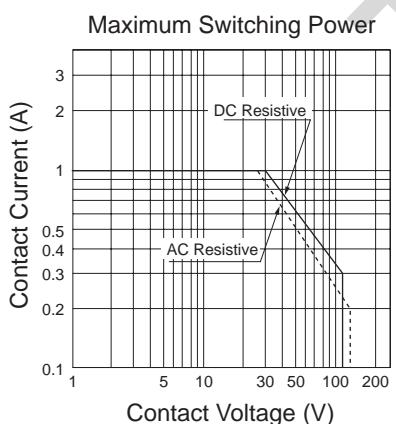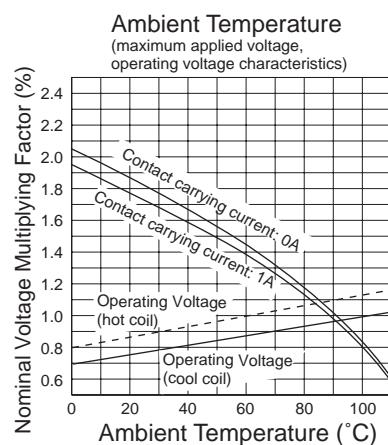
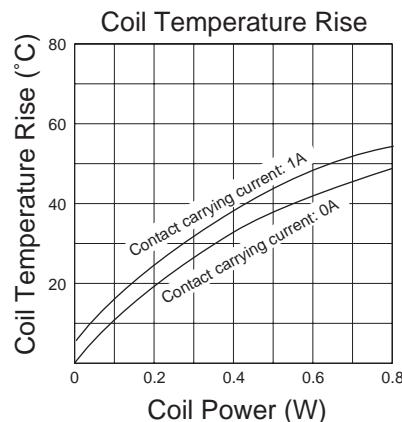
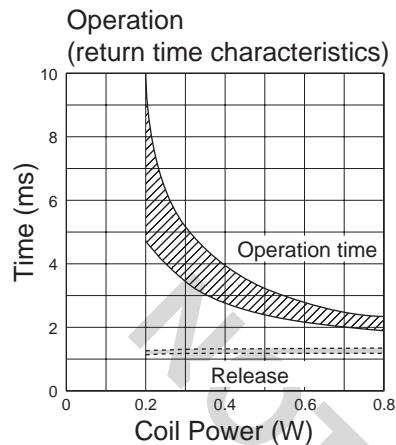


## ■ REFERENCE DATA

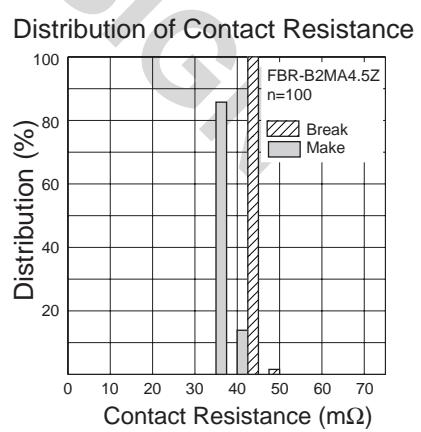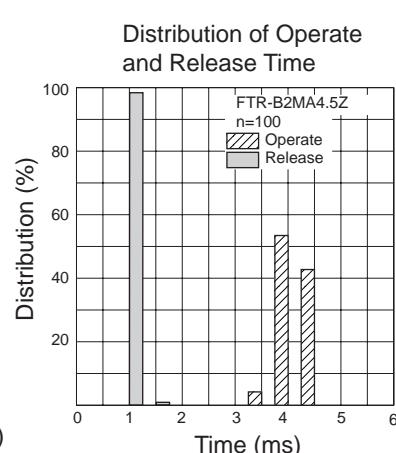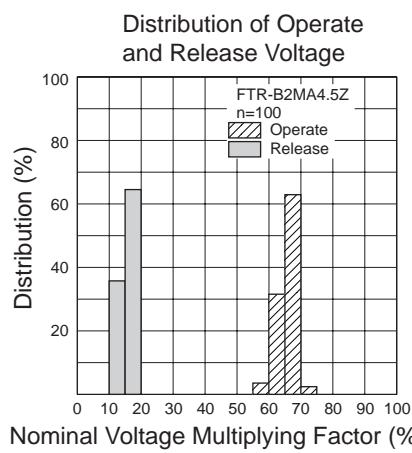

# **FTR-B2 Series**


## ■ REFERENCE DATA

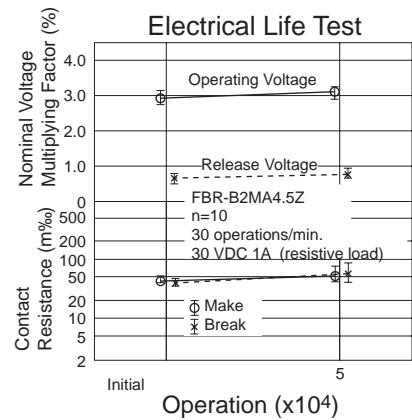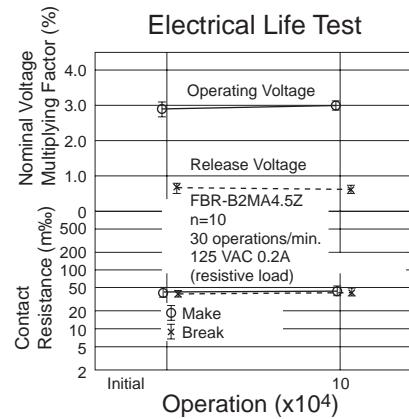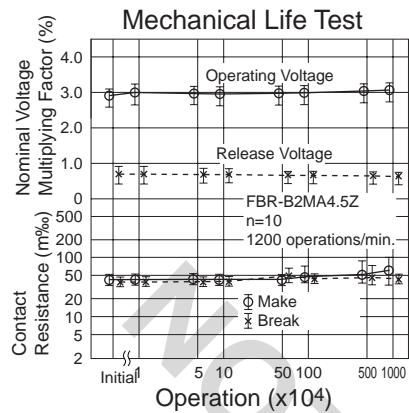


## ■ DIMENSIONS

## ● Dimensions

Through hole type

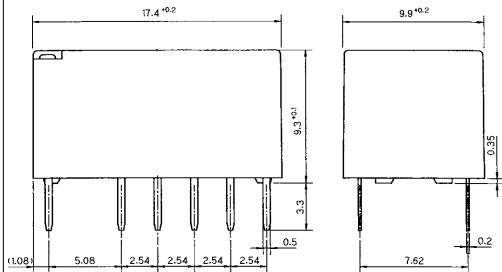


## ● Schematics (BOTTOM VIEW)

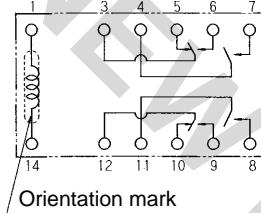


- PC board mounting  
hole layout  
(BOTTOM VIEW)

## ● Dimensions


## Surface mount type

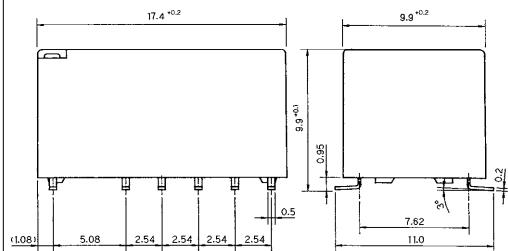

## ● Schematics (TOP VIEW)

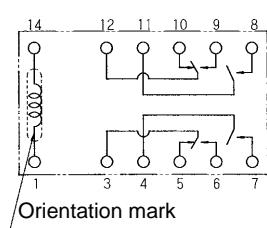


- PC board mounting  
hole layout  
(TOP VIEW)

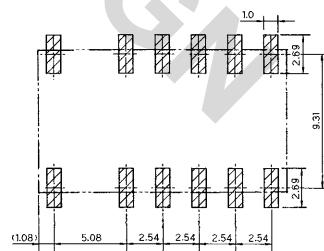


# FTR-B2 Series

## ■ RECOMMENDED CONDITION (Temperature Profile)

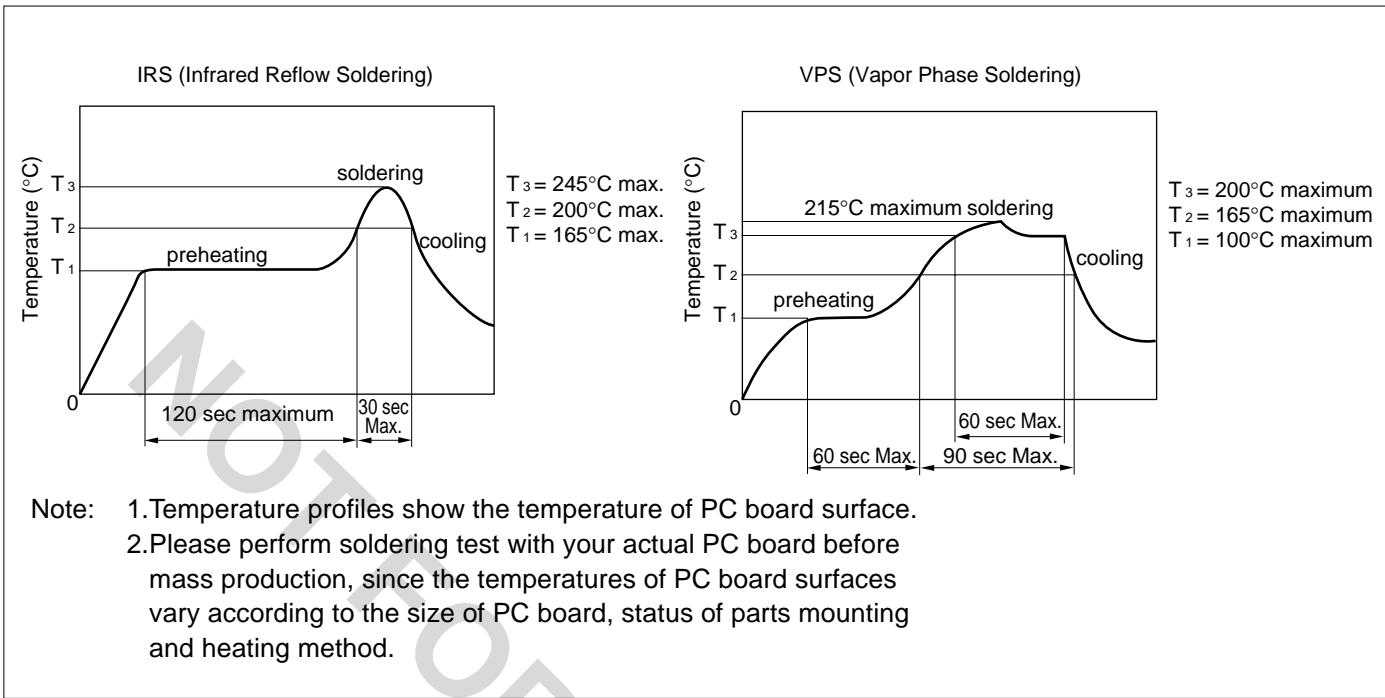

## ■ PACKAGING

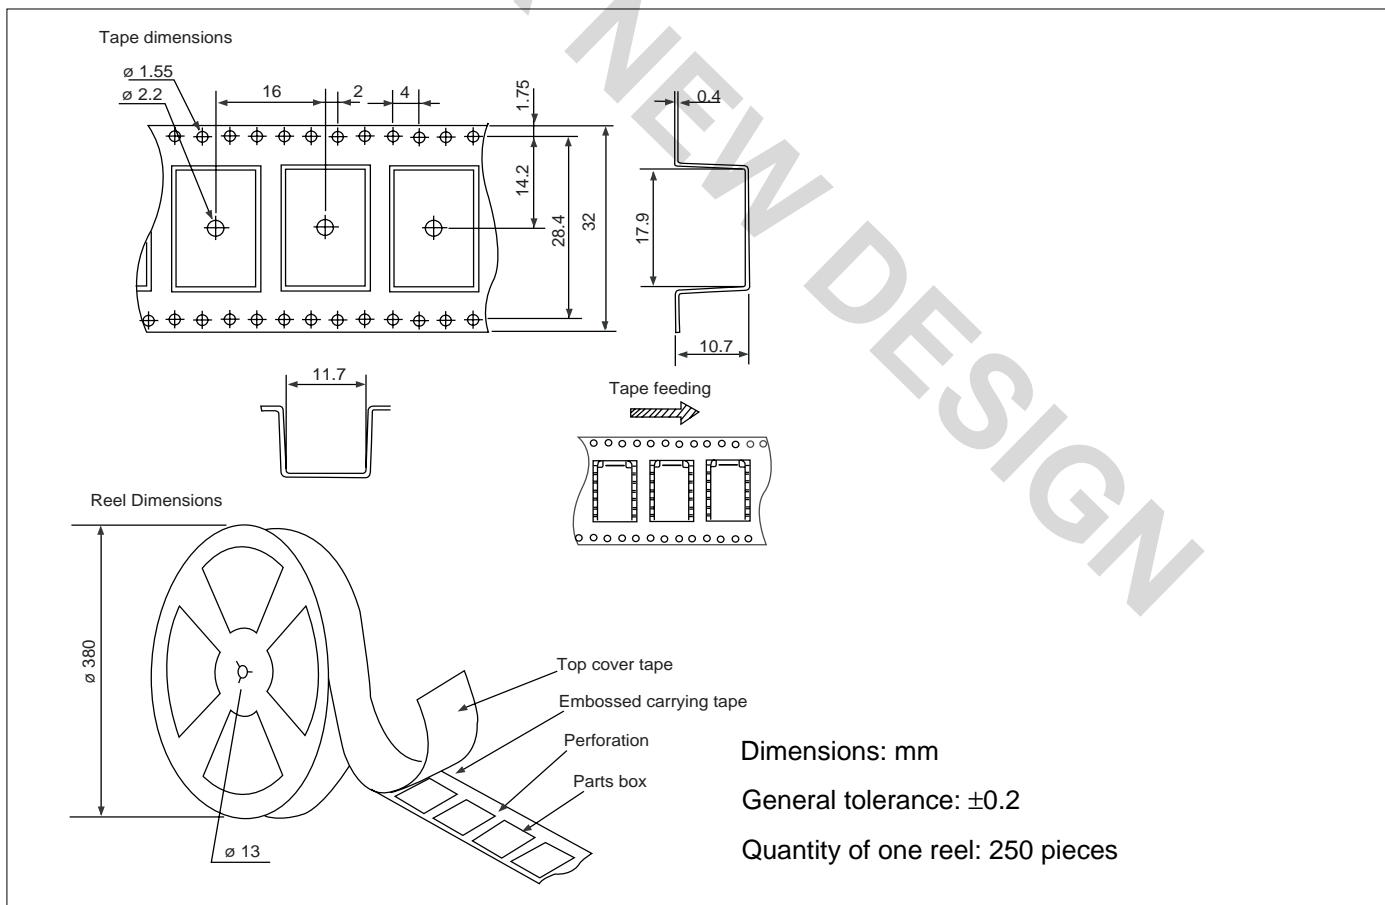

# FTR-B2 Series

## RoHS Compliance and Lead Free Relay Information

### 1. General Information


- Relays produced after the specific date code that is indicated on each data sheet are lead-free now. Most of our signal and power relays are lead-free. Please refer to Lead-Free Status Info. (<http://www.fcai.fujitsu.com/pdf/LeadFreeLetter.pdf>)
- Lead free solder paste currently used in relays is Sn-3.0Ag-0.5Cu. From February 2005 forward Sn-3.0Cu-Ni will be used for FTRB3 and FTR-B4 series relays.
- Most signal and some power relays also comply with RoHS. Please refer to individual data sheets. Relays that are RoHS compliant do not contain the 6 hazardous materials that are restricted by RoHS directive (lead, mercury, cadmium, chromium IV, PBB, PBDE).
- It has been verified that using lead-free relays in leaded assembly process will not cause any problems (compatible).
- "LF" is marked on each outer and inner carton. (No marking on individual relays).
- To avoid leaded relays (for lead-free sample, etc.) please consult with area sales office.

We will ship leaded relays as long as the leaded relay inventory exists.

### 2. Recommended Lead Free Solder Profile

- Recommended solder paste Sn-3.0Ag-0.5Cu and Sn-3.0 Cu-Ni (only FTR-B3 and FTR-B4 from February 2005)

#### Reflow Solder condition

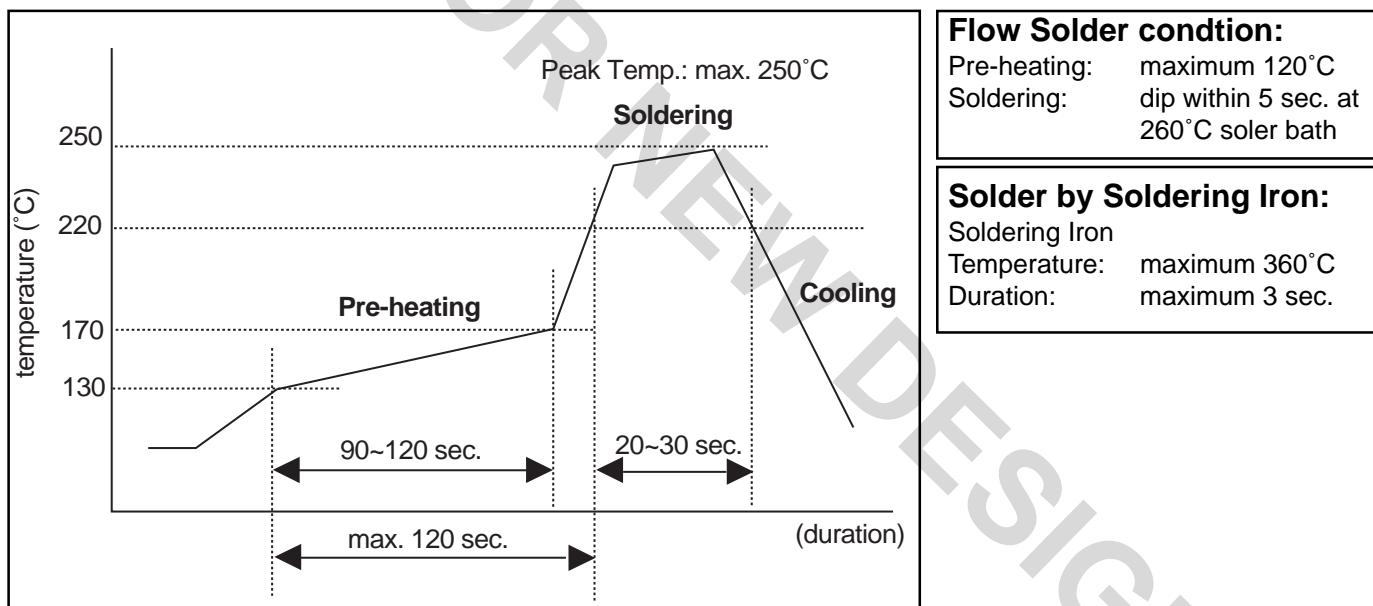

We highly recommend that you confirm your actual solder conditions

### 3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays.

### 4. Tin Whisker

- SnAgCu solder is known as low risk of tin whisker. No considerable length whisker was found by our in-house test.

### 5. Solid State Relays

# FTR-B2 Series

## Fujitsu Components International Headquarter Offices

**Japan**  
Fujitsu Component Limited  
Gotanda-Chuo Building  
3-5, Higashigotanda 2-chome, Shinagawa-ku  
Tokyo 141, Japan  
Tel: (81-3) 5449-7010  
Fax: (81-3) 5449-2626  
Email: [promothq@ft.ed.fujitsu.com](mailto:promothq@ft.ed.fujitsu.com)  
Web: [www.fcl.fujitsu.com](http://www.fcl.fujitsu.com)

**North and South America**  
Fujitsu Components America, Inc.  
250 E. Caribbean Drive  
Sunnyvale, CA 94089 U.S.A.  
Tel: (1-408) 745-4900  
Fax: (1-408) 745-4970  
Email: [marcom@fcai.fujitsu.com](mailto:marcom@fcai.fujitsu.com)  
Web: [www.fcai.fujitsu.com](http://www.fcai.fujitsu.com)

**Europe**  
Fujitsu Components Europe B.V.  
Diamantlaan 25  
2132 WV Hoofddorp  
Netherlands  
Tel: (31-23) 5560910  
Fax: (31-23) 5560950  
Email: [info@fceu.fujitsu.com](mailto:info@fceu.fujitsu.com)  
Web: [www.fceu.fujitsu.com](http://www.fceu.fujitsu.com)

**Asia Pacific**  
Fujitsu Components Asia Ltd.  
102E Pasir Panjang Road  
#04-01 Citilink Warehouse Complex  
Singapore 118529  
Tel: (65) 6375-8560  
Fax: (65) 6273-3021  
Email: [fcal@fcal.fujitsu.com](mailto:fcal@fcal.fujitsu.com)  
[www.fcal.fujitsu.com](http://www.fcal.fujitsu.com)

© 2005 Fujitsu Components America, Inc. All company and product names are trademarks or registered trademarks of their respective owners. Rev. 06/07/2005.

NOT FOR NEW DESIGN