

GL7101

GL7101**EARTH LEAKAGE CURRENT DETECTOR****Description**

(Top view)


The GL7101 is designed for use in earth leakage circuit interrupters for operation directly off the AC Line in breakers.

It contains pre regulator, main regulator, after regulator, differential amplifier, level comparator, latch circuit. The input in the differential amplifier is connect to the secondary node of zero current transformer.


The level comparator generates high level when earth leakage current is greater than some level.

Feature

- Low Power consumption ($P_D = 5\text{mW}$) 100V/ 200V
- 100V/200V Common Built-in Voltage Regulator
- High Gain Differential Amplifier
- High Input Sensitivity
- Minimum External Parts
- Large Surge Margin
- Wide Operating Temperature Range ($T_A = -30$ to 85°C)
- High Noise Immunity

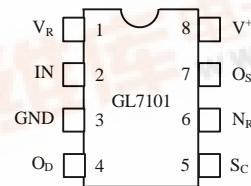Pin Configuration**Block diagram****Absolute Maximum Rating ($T_A = 25^\circ\text{C}$)**

| | | |
|-----------------------|------------|----|
| Supply voltage | 20 | V |
| Supply Current | 8 | mA |
| Power Dissipation | 200 | mW |
| Operating Temperature | -30 to 85 | °C |
| Storage Temperature | -55 to 125 | °C |

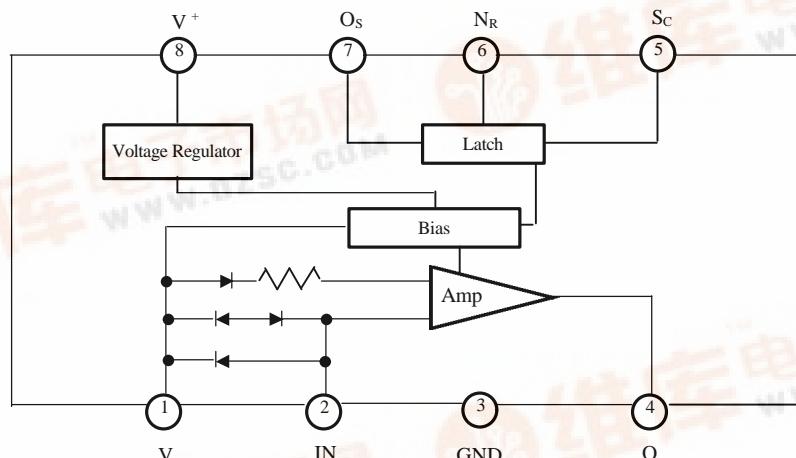

Recommended Operating Condition : Ta = -30 ; Éto 80 ; É


| PARAMETER | SYMBOL | MIN. | TYP. | MAX. | UNIT |
|-------------------------------|-----------------|------|------|------|------|
| Supply Voltage | V ⁺ | 12 | | | V |
| V _S -GND Capacitor | C _{VS} | 1 | | | μF |
| O _S -GND Capacitor | C _{OS} | | | 1 | μF |

Electrical Characteristics

| PARAMETER | SYMBOL | CONDITIONS | | TEMP (j E) | MIN. | TYP. | MAX | UNIT | TEST CIRCUIT |
|---|--------------------|--|-------------------------|---------------|------|------|-----|---------|-----------------|
| Supply Current 1 | I _{S1} | V ⁺ =12V, V _R -V _I =30mV | | -30 | - | - | 580 | μA | 1 |
| | | | | 25 | - | 400 | 530 | | |
| | | | | 85 | - | - | 480 | | |
| * Trip Voltage | V _T | V ⁺ =16V, V _R -V _I =X | | -30 85 | 9 | 13.5 | 18 | mV(rms) | 2 |
| Differential Amplifier Output Current 1 | I _{TD1} | V ⁺ =16V, V _R -V _I =30mV V _{OD} =1.2V | | 25 | -12 | - | -30 | μA | 3 |
| Differential Amplifier Output Current 2 | I _{TD2} | V ⁺ =6V, V _R -V _I =short V _{OD} =0.8V | | 25 | 17 | - | 37 | μA | 4 |
| Output Current | I _O | V _{SC} =1.4V V _{OS} =0.8V | I _{SI} =580 μA | -30 | -200 | - | | μA | 5 |
| | | | I _{SI} =530 μA | 25 | -100 | - | | | |
| | | | I _{SI} =480 μA | 85 | -75 | - | | | |
| S _C On Voltage | V _{SC} ON | V ⁺ =16V | | 25 | 0.7 | - | 1.4 | V | 6 |
| S _C Input Current | I _{SC} ON | V ⁺ =12V | | 25 | - | - | 5 | μA | 7 |
| Output "L" Current | I _{OSL} | V ⁺ =12V, V _{OSL} >0.2V | | -30 85 | 200 | - | - | μA | 8 |
| Input Clamp Voltage | V _{IC} | V ⁺ =12V, V _{IC} =20mA | | -30 85 | 4.3 | - | 6.7 | V | 9 |
| Differential Input Clamp Voltage | V _{IDC} | I _{IDC} =100mV | | -30 85 | 0.4 | - | 2 | V | 10 |
| Max. Current voltage | V _{SM} | I _{SM} =7mA | | 25 | 20 | - | 28 | V | 11 |
| Supply Current 2 | I _{S2} | V _{OS} =0.5V, V _R -V _I =X | | -30 85 | - | - | 900 | μA | 12 |
| Latch Circuit Off Supply Voltage | V _{OFF} | | | 25 | 0.5 | - | | V | 13 |
| Response Time | T _{ON} | V ⁺ =16V, V _R -V _I =0.3V | | 25 | 1 | - | 4 | ms | 14 |


* A: 9 ~ 12.55 B: 11.5 ~ 15.5 C: 14.5 ~ 18

Typical Performance Curves

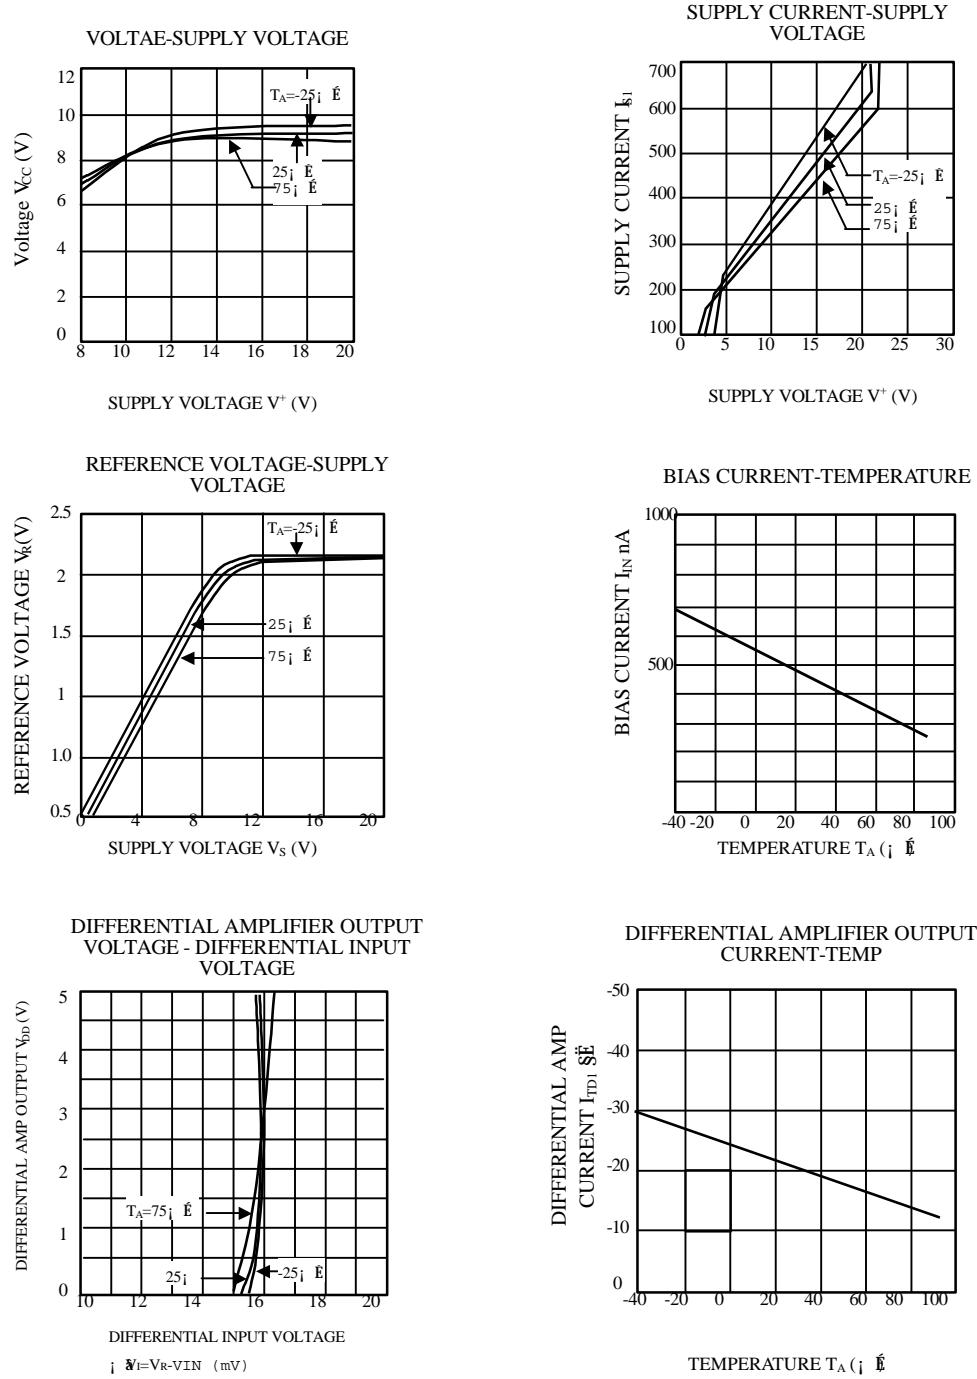


Test Circuit


1.

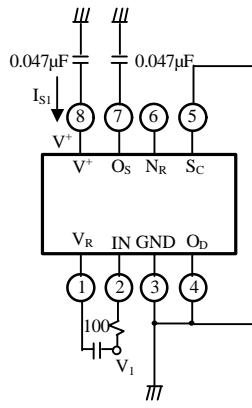


2.

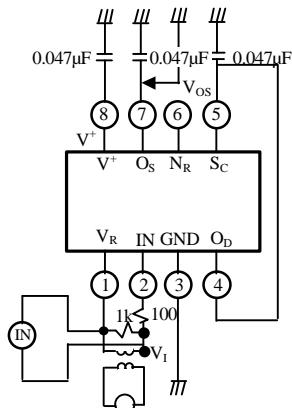


3.

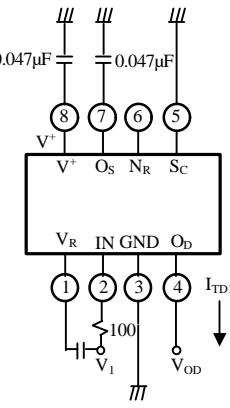


4.

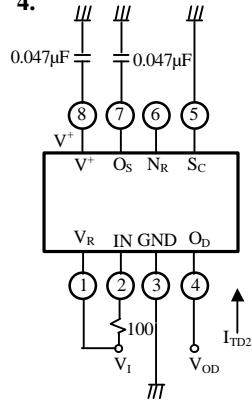


5.

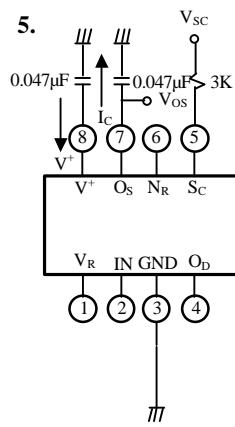


6.

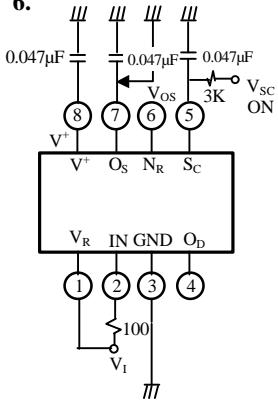


7.

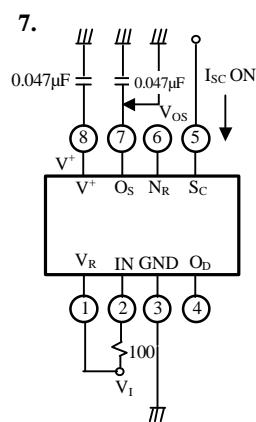


8.

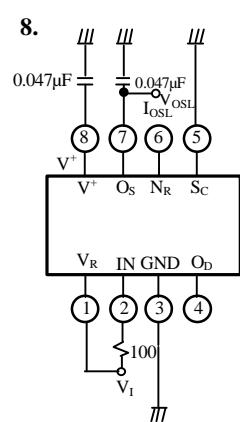


9.

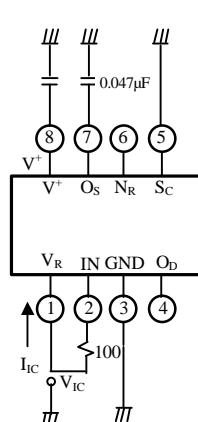


10.

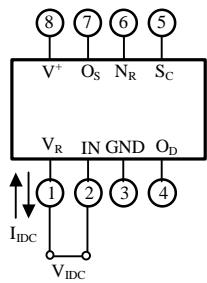


11.

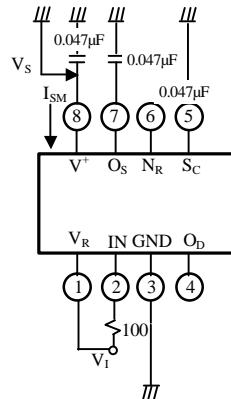


12.

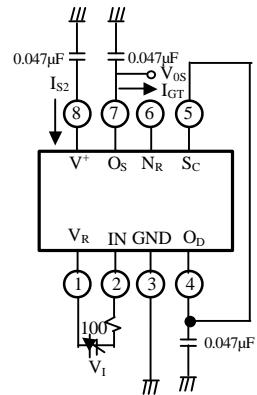

13.

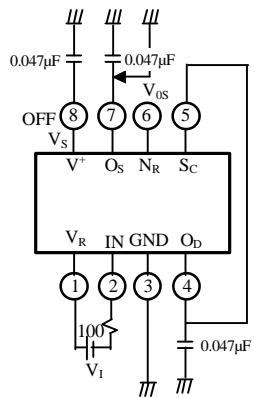

14.

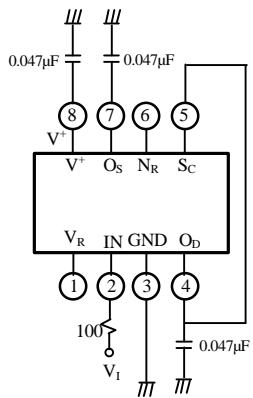

Typical Application

