

HA13441, HA13442

Three-Phase Brushless DC Motor Driver

Description

The HA13441 and HA13442 are three-phase brushless DC motor drive ICs of 2 A/phase or 4 A/phase.

Functions

- 2 A/phase (4 A/phase) three phase output circuit
- Hall-effect element amp, matrix
- Chip enable
- Buffer amp
- Control amp
- Speed discriminator
- Oscillation circuit
- Zero-cross detector
- Integrator
- Current limiter
- Ready circuit
- Low supply voltage inhibit
- Over-temperature shut down


Features

- Servo system on a single chip
- Digital servo system requires no adjustment
- Large output current (2 A/phase, 4 A/phase)
- Low output voltage noise
- Small speed error
- Low thermal resistance package

Ordering Information


Type No.	Package
HA13441	SP-23TA
HA13441S	SP-23TD
HA13441V	SP-23TB
HA13442	SP-23TA
HA13442S	SP-23TD
HA13442V	SP-23TB

HA13440MP/HA13441/HA13442

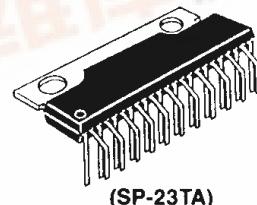


(SP-23TA)

HA13441S/HA13442S

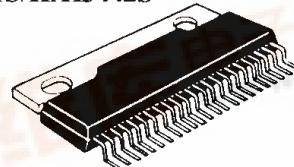


(SP-23TD)

HA13441V/HA13442V

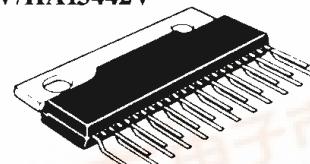


(SP-23TB)

Pin Arrangement

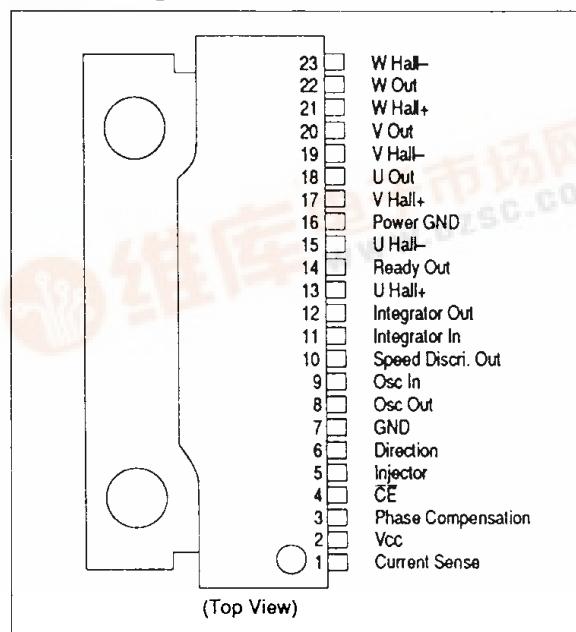

HA13441, HA13442

Block Diagram

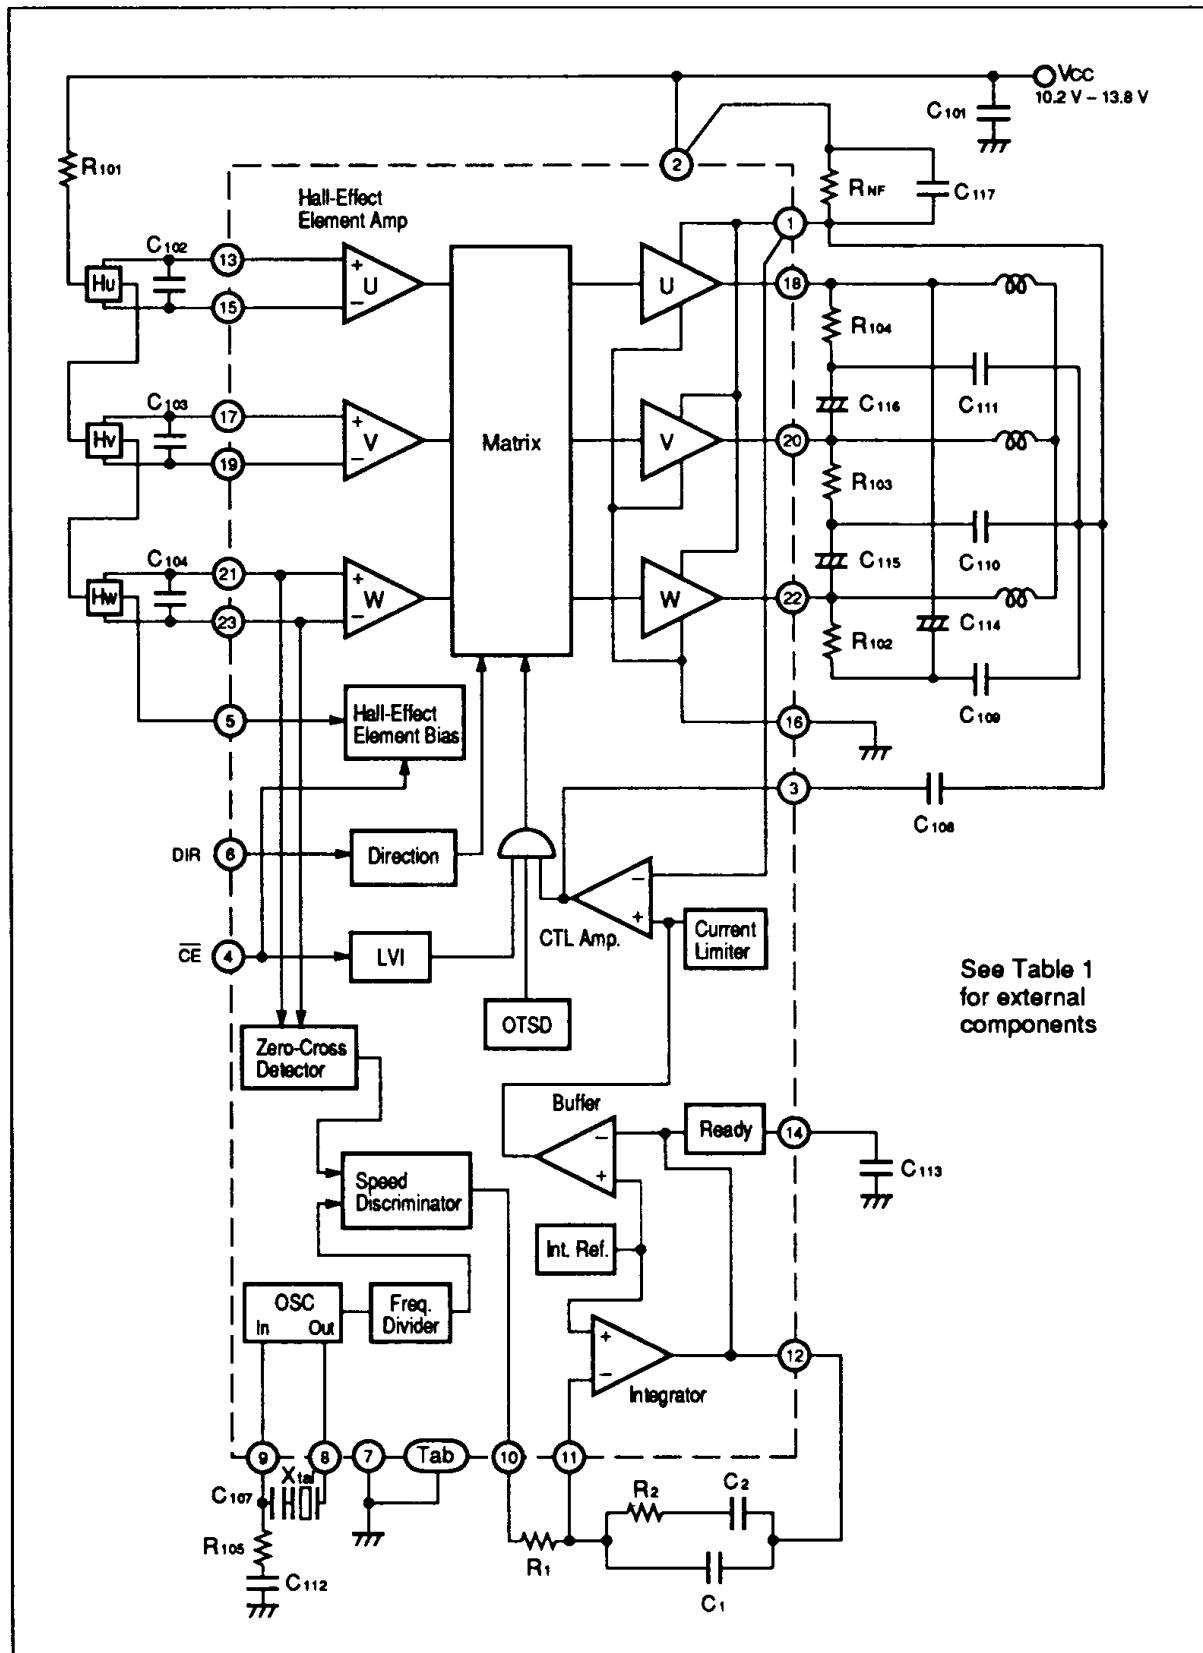

HA13441, HA13442

Table 1 External Components

Part No.	Reference Value	Purpose	Note	
	HA13441 3.5"x2-disk HDD	HA13442 5.25"x6-disk HDD		
R ₁₀₁	1 kΩ	1 kΩ	Hall-effect element bias	
R ₁₀₂	470 Ω	470 Ω	Oscillation stability	1
R ₁₀₃	330 Ω	330 Ω	Stability	2
R ₁₀₄ , R ₁₀₅ , R ₁₀₆	2.2 Ω	2.2 Ω	Stability	2
R ₁	22 kΩ	22 kΩ	Integration constant	3
R ₂	330 kΩ	330 kΩ	Integration constant	3
R _{NF}	0.47 Ω	0.22 Ω	Current sense	4
C ₁₀₁	0.1 μF	0.1 μF	Power supply bypass	2
C ₁₀₂	10 pF	10 pF	AC coupling OSC	
C ₁₀₃	0.047 μF	0.047 μF	Oscillation stability	1
C ₁₀₄	0.1 μF	0.1 μF	Ready output filter	
C ₁₀₅ , C ₁₀₆ , C ₁₀₇	3300 pF	3300 pF	Stability	2
C ₁₀₈	0.068 μF	0.068 μF	Control amp phase compensation	2
C ₁₀₉ , C ₁₁₀ , C ₁₁₁	0.1 μF	0.1 μF	Stability	2, 5
C ₁₁₂ , C ₁₁₃ , C ₁₁₄	2.2 to 10 μF	2.2 to 10 μF	EMI reduction	6
C ₁₁₅	0.1 μF	0.1 μF	Stability	5
C ₁	0.022 μF	0.1 μF	Integration constant	3
C ₂	0.47 μF	1.0 μF	Integration constant	3
X'tal	3.932 MHz	3.932 MHz	Resonator	7

- Notes:**
1. Unnecessary at some output frequencies. Contact the resonator manufacturer.
 2. Put them as near the IC as possible. When attached at a distance, these parts lose effect.
 3. The optimum value depends on the motor specification (moment of inertia including load, torque constant, standard rotation number).

HA13441, HA13442

4. Output current is limited as shown below. Use non-inductive type for R_{NF}.

$$I_{omax} = \frac{V_{ref1}}{R_{NF}}$$

5. Use capacitors which have good frequency characteristics and cause no second resonance.
 6. Use non-polar type.
 7. Use crystal oscillator.

Table 2 Truth Table

Chip Enable (CE)	Hall-Effect Amp Input			Output		
	U	V	W	U	V	W
L	H	L	H	H(L)	L(H)	Open(Open)
	H	L	L	H(L)	Open(Open)	L(H)
	H	H	L	Open(Open)	H(L)	L(H)
	L	H	L	L(H)	H(L)	Open(Open)
	L	H	H	L(H)	Open(Open)	H(L)
	L	L	H	Open(Open)	L(H)	H(L)
H	X	X	X	Open		

Open: High Impedance

X: Don't care

Table 3 Absolute Maximum Ratings (Ta=25°C)

Item	Symbol	HA13441	HA13442	Unit	Note
Supply voltage	V _{CC}	+15	+15	V	1
Input voltage	V _{IN}	V _{CC}	V _{CC}	V	2
Output current	I _O	2	4	A	
Power dissipation	P _T	25	25	W	3
Junction temperature	T _J	150	150	°C	4
Storage temperature range	T _{STG}	-55 to +125	-55 to +125	°C	

The absolute maximum ratings are limiting values, to be applied individually, beyond which the device may be permanently damaged. Functional operation under any of these conditions is not guaranteed. Exposing a circuit to its absolute maximum rating for extended periods of time may affect the device's reliability.

- Notes: 1. The recommended operating supply voltage range is 12 V ± 15% (10.2 V to 13.8 V).
 2. Hall-effect element amp input, Direction input, Chip Enable input.



3. $T_c=75^\circ\text{C}$. Thermal resistance is:
 $\theta_{j-c} \leq 3^\circ\text{C}$
 $\theta_{j-a} \leq 40^\circ\text{C}$
4. The operating junction temperature range is $T_{jop}=0^\circ\text{C}$ to $+125^\circ\text{C}$.

Table 4 Electrical Characteristics ($T_a=25^\circ\text{C}$, $V_{cc}=12\text{ V}$)

Item	Symbol	Min	Typ	Max	Unit	Test Condition	Applicable Terminal	Note
Quiescent current	I_{cc1}	—	1.0	2	mA	$CE=2\text{ V}$	1, 2	1
	I_{cc2}	—	24.0	36.0	mA	$CE=0.8\text{ V}$		1
Hall-effect element amp to bias	I_{HB}	—	2	10	μA	$V_H=6.0\text{ V}$		
	V_H	1.3	—	9.5	V			
Output amp	I_{CER}	—	—	2	mA	$V_{CE}=15\text{ V}$	18, 20, 22	
	V_{sat1}	—	2.8	3.2	V	$I_o=3.0\text{ A}(1.5\text{ A})$	2	
	V_{sat2}	—	1.8	2.4	V	$I_o=0.6\text{ A}(0.3\text{ A})$	2	
Reference voltage internal current limiter	V_{ref1}	0.48	0.56	0.63	V		1	2
Buffer amp	Internal reference voltage	V_{ref2}	2.95	3.15	3.35	V	11	
	Voltage gain	G_v	-8 (-5)	-6 (-3)	-4 (-1)	dB	1	3
	Difference of gain	ΔG_v	—	—	± 1.0	dB		
Integrator	Input current	$I_B(ER)$	—	—	± 60	nA	11	
	Output voltage swing	A_+	1.10	1.40	1.60	V	$I_o=0.5\text{ mA}$	12
		A_-	-0.05	-0.7	-0.85	V	$I_o=-0.5\text{ mA}$	
	Gain bandwidth	BW	100	—	—	kHz	$G=0\text{ dB}$	

HA13441, HA13442

Electrical Characteristics (Ta=25 °C, Vcc=12 V) (cont)

Speed discrimi- nator	Output high voltage Voh	5.8	6.1	—	V	Io=0.5 mA	10	4
	Output low voltage Vol	—	—	0.2	V	Io=-0.5 mA		4
	Cut off current Ioff	—	—	±60	nA			
	Count number	—	2048	—				
Chip enable	Input high voltage Vih	2.0	—	—	V		4	
	Input low voltage Vil	—	—	0.8	V			
	Input high current Iih	—	—	±10	µA	Vih=5.5 V		
	Input low current Iil	—	—	±10	µA	Vil=0 V		
OSC	Frequency error fosc	—	—	0.1	%		8	
	Operating frequency fosc	—	—	8	MHz			
Zero-cross detection sensitivity	Vz	—	—	30	mVpp		21, 23	5
Ready circuit	Output high voltage Voh	4.8	5.0	—	V	Isource=0.1 mA	14	
	Output low voltage Vol	—	0.2	0.3	V	Isink=0.1 mA		
	Output current Isink	0.1	0.2	0.3	mA	V=2.5 V		
	Ifo	0.1	0.2	0.3	mA	V=2.5 V		
LVI operating voltage	—	—	9.0	V				
OTSD operating temperature	Tsd	125	—	—	°C			
Direction	Input high voltage Vih	4.0	—	—	V		6	
	Input low voltage Vil	—	—	0.8	V			
	Input high current Iih	—	—	±10	µA	Vih=5.5 V		
	Input low current Iil	—	—	±10	µA	Vil=0 V		

- Notes:
1. Sum of ①, ② input pins
 2. Sum of upper and lower transistor saturation voltages.
 3. Measure from Vcc pin.
 4. Measure from Vref2.
 5. Minimum input voltage necessary for producing trigger pulse.