



v01.0803

HMC337

GaAs MMIC SUB-HARMONICALLY PUMPED MIXER, 17 - 25 GHz

Typical Applications


The HMC337 is ideal for:

- 18 and 23 GHz Microwave Radios
- Up and Down Converter for Point to Point Radios
- Satellite Communication Systems

Features

- Integrated LO Amplifier: -5 dBm Input
- Sub-Harmonically Pumped (x2) LO
- High 2LO/RF Isolation: > 25 dB
- Small Size: 0.97mm x 1.32mm

Functional Diagram

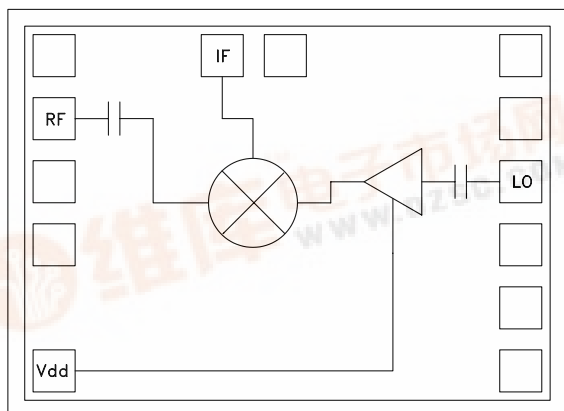

General Description

The HMC337 chip is a sub-harmonically pumped (x2) MMIC mixer with an integrated LO amplifier which can be used as an upconverter or downconverter. The chip utilizes a GaAs PHEMT technology that results in a small overall chip area of 1.28mm². The 2LO to RF isolation is excellent eliminating the need for additional filtering. The LO amplifier is a single bias (+3V to +4V) two stage design with only -5 dBm nominal drive requirement. All data is measured with the chip in a 50 ohm test fixture connected via 0.076 mm (3 mil) ribbon bonds of minimal length <0.31 mm (<12 mils).

5

MIXERS - CHIP

Electrical Specifications, $T_A = +25^\circ\text{C}$, As a Function of Vdd


| Parameter | IF = 1 GHz LO = -5 dBm & Vdd = +4V | | | IF = 1 GHz LO = -5 dBm & Vdd = +3V | | | Units |
|--------------------------|---------------------------------------|---------|------|---------------------------------------|---------|------|-------|
| | Min. | Typ. | Max. | Min. | Typ. | Max. | |
| Frequency Range, RF | 17 - 25 | | | 18 - 24 | | | GHz |
| Frequency Range, LO | 8.5 - 12.5 | | | 9 - 12 | | | GHz |
| Frequency Range, IF | DC - 3 | | | DC - 3 | | | GHz |
| Conversion Loss | | 9 | 13 | | 9 | 13 | dB |
| Noise Figure (SSB) | | 9 | 13 | | 9 | 13 | dB |
| 2LO to RF Isolation | 10 | 25 - 30 | | 10 | 25 - 30 | | dB |
| 2LO to IF Isolation | 27 | 40 - 50 | | 30 | 40 - 50 | | dB |
| IP3 (Input) | 3 | 10 | | 2 | 9 | | dBm |
| 1 dB Compression (Input) | -5 | 0 | | -6 | -1 | | dBm |
| Supply Current (Idd) | | 28 | | | 25 | | mA |

Unless otherwise noted, all measurements performed as downconverter, IF= 1 GHz.




GaAs MMIC SUB-HARMONICALLY PUMPED MIXER, 17 - 25 GHz


Conversion Gain vs. Temperature @ LO = -5 dBm, Vdd = +4V

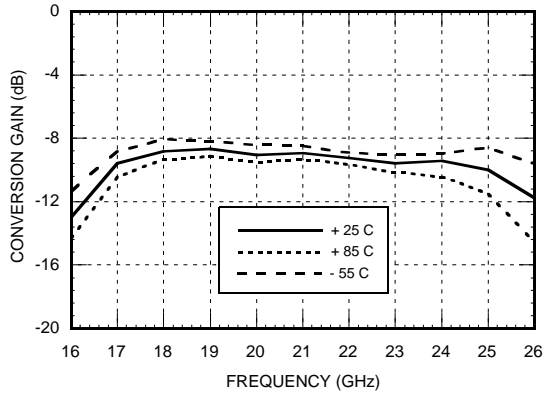


Conversion Gain vs. Temperature @ LO = -5 dBm, Vdd = +3V

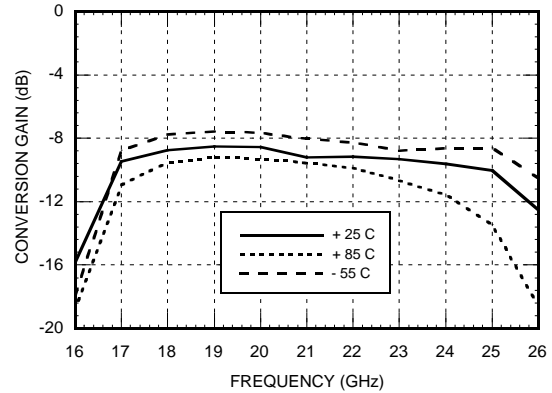


Conversion Gain vs. LO Drive @ Vdd = +4V

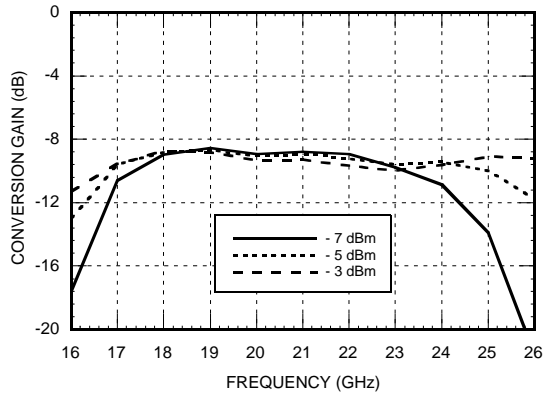


Conversion Gain vs. LO Drive @ Vdd = +3V

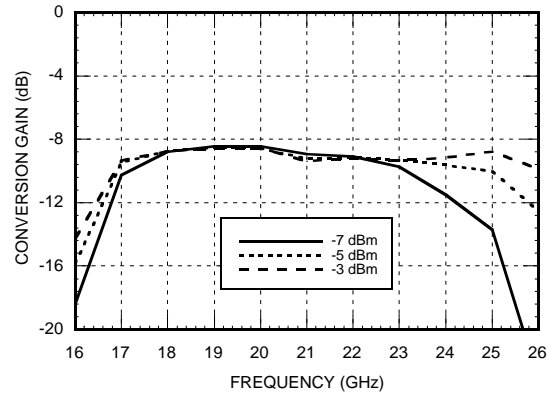

Isolation @ LO = -5 dBm, Vdd = +4V

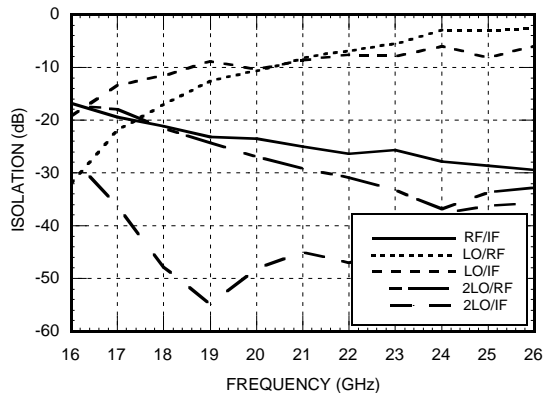


Isolation @ LO = -5 dBm, Vdd = +3V

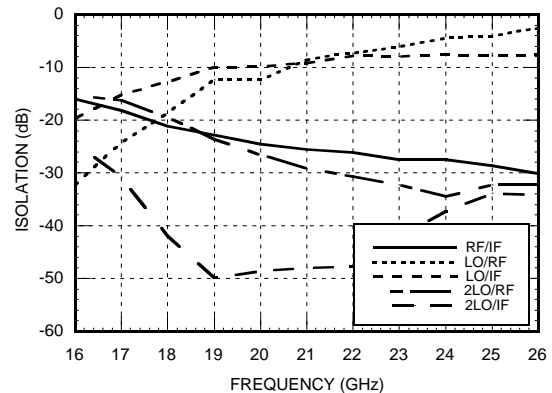


GaAs MMIC SUB-HARMONICALLY PUMPED MIXER, 17 - 25 GHz


Input IP3 vs. LO Drive @ Vdd = +4V *

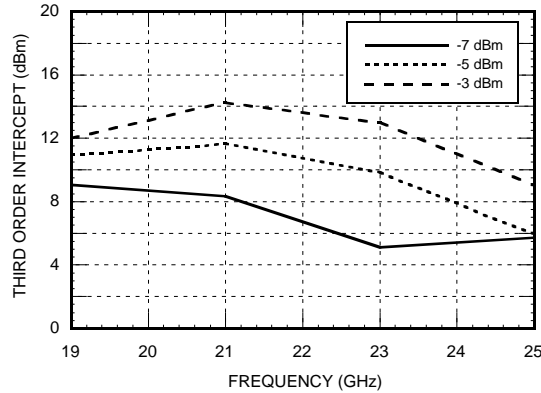


Input IP3 vs. LO Drive @ Vdd = +3V *

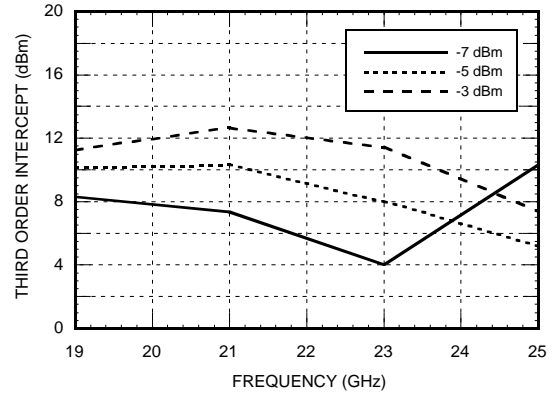


Input IP3 vs. Temperature @ LO = -5 dBm, Vdd = +4V *

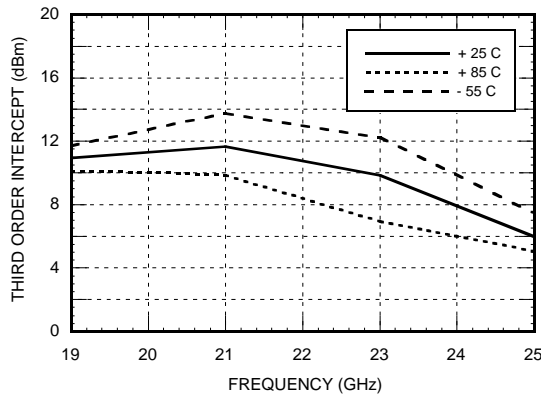


Input IP3 vs. Temperature @ LO = -5 dBm, Vdd = +3V *

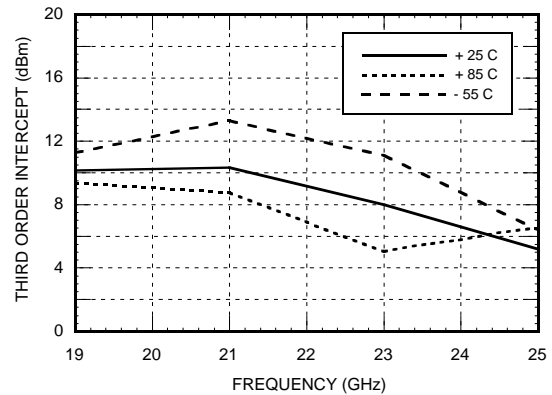

Input IP2 vs. LO Drive @ Vdd = +4V *

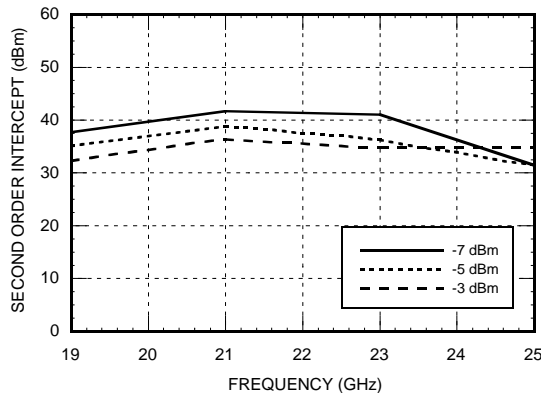


Input IP2 vs. LO Drive @ Vdd = +3V *

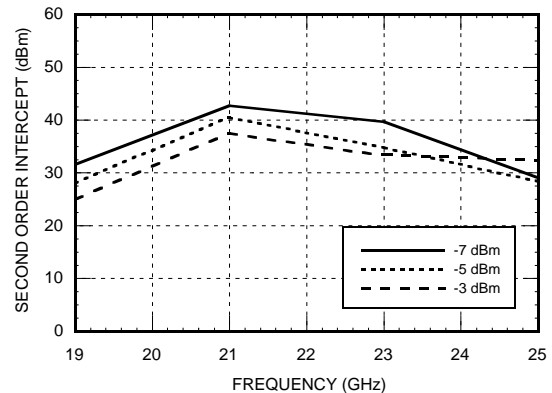


* Two-tone input power = -10 dBm each tone, 1 MHz spacing.

GaAs MMIC SUB-HARMONICALLY PUMPED MIXER, 17 - 25 GHz


Input IP2 vs. Temperature
@ LO = -5 dBm, Vdd = +4V *

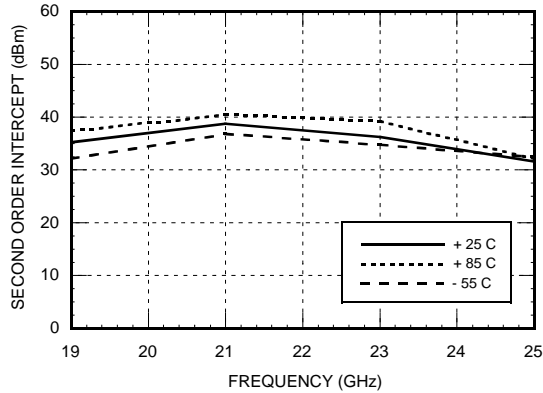


Input IP2 vs. Temperature
@ LO = -5 dBm, Vdd = +3V *

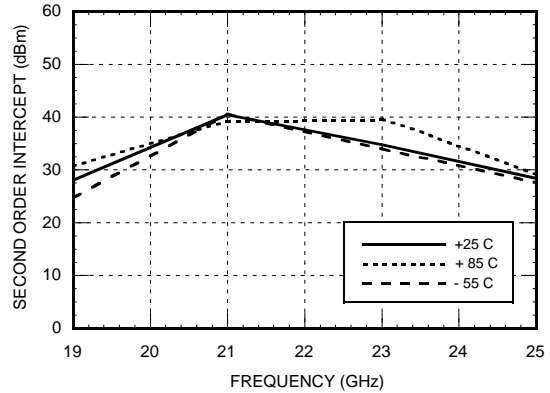


Input P1dB vs. Temperature
@ LO = -5 dBm, Vdd = +4V

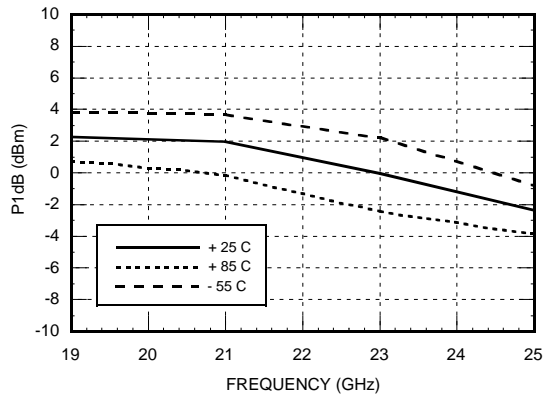


Input P1dB vs. Temperature
@ LO = -5 dBm, Vdd = +3V

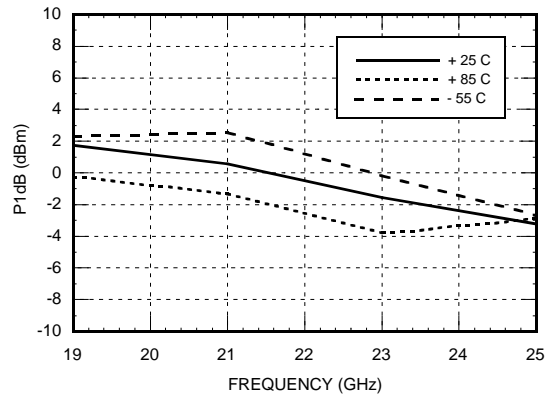

RF & LO Return Loss
@ LO = -5 dBm, Vdd = +4V

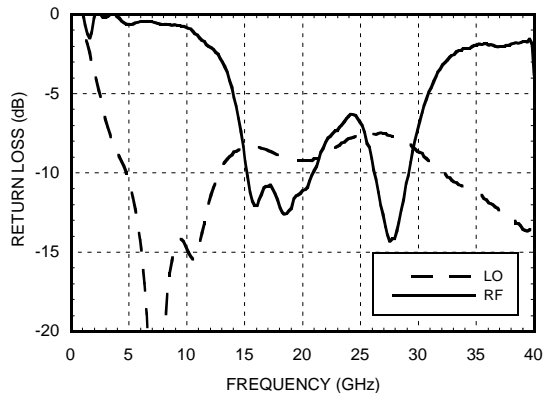


IF Return Loss
@ LO = -5 dBm, Vdd = +4V

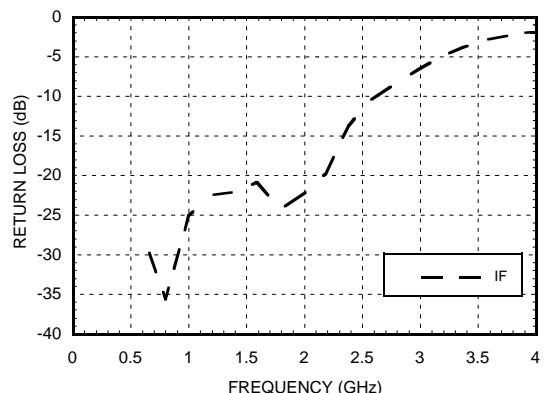

* Two-tone input power = -10 dBm each tone, 1 MHz spacing.


GaAs MMIC SUB-HARMONICALLY PUMPED MIXER, 17 - 25 GHz

IF Bandwidth @ LO = -5 dBm

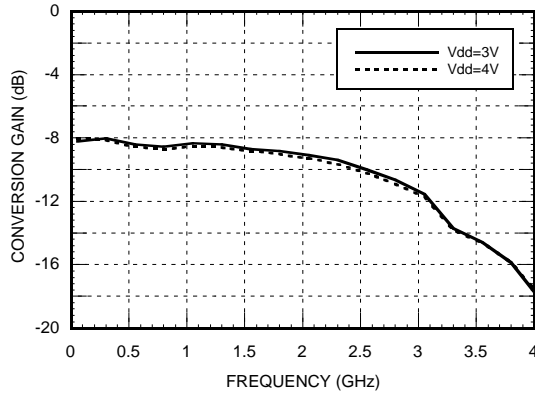

Upconverter Performance

Conversion Gain, LO = -5 dBm Vdd = +4V

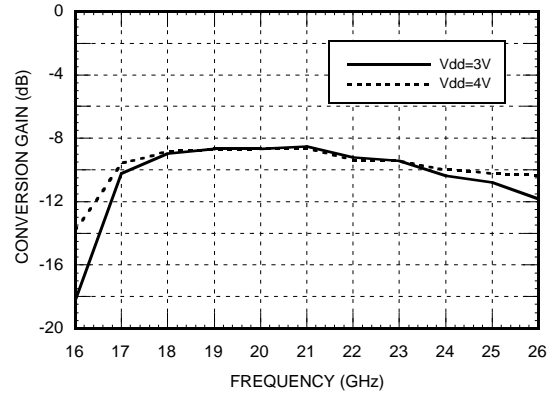

Absolute Maximum Ratings

| | |
|--|----------------|
| RF / IF Input (Vdd = +5V) | +13 dBm |
| LO Drive (Vdd = +5V) | +13 dBm |
| Vdd | 5.5V |
| Continuous Pdiss (Ta = 85 °C) (derate 2.64 mW/°C above 85 °C) | 238 mW |
| Storage Temperature | -65 to +150 °C |
| Operating Temperature | -55 to +85 °C |

MxN Spurious @ IF Port, Vdd = +4V

| mRF | nLO | | | | | |
|-----|-----|----|----|----|----|----|
| | ±5 | ±4 | ±3 | ±2 | ±1 | 0 |
| -3 | | | | | | |
| -2 | 61 | | | | | |
| -1 | 59 | 31 | 52 | | | |
| 0 | | | 23 | 34 | -5 | |
| 1 | | | | X | 47 | 19 |
| 2 | | 49 | 48 | 79 | 60 | |
| 3 | 88 | 71 | 95 | | | |

RF = 22 GHz @ -10 dBm
 LO = 10.5 GHz @ -5 dBm
 All values in dBc below IF power level.
 Measured as downconverter.


MXN Spurious @ RF Port, Vdd = +4V

| mIF | nLO | | | | | |
|-----|-----|----|-----|----|-----|----|
| | ±5 | ±4 | ±3 | ±2 | ±1 | 0 |
| -3 | | | | | | |
| -2 | | 56 | 86 | 48 | 102 | |
| -1 | | 65 | 25 | 59 | 53 | |
| 0 | | | 33 | X | 48 | |
| 1 | | | -10 | 16 | -9 | |
| 2 | | | 37 | X | 43 | 17 |
| 3 | | | 30 | 50 | 40 | 61 |
| 3 | | | 77 | 57 | 80 | 66 |

IF = 1 GHz @ -10 dBm
 LO = 10.5 GHz @ -5 dBm
 All values in dBc below RF power level.
 Measured as upconverter.

GaAs MMIC SUB-HARMONICALLY PUMPED MIXER, 17 - 25 GHz


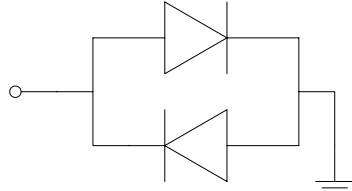

Outline Drawing

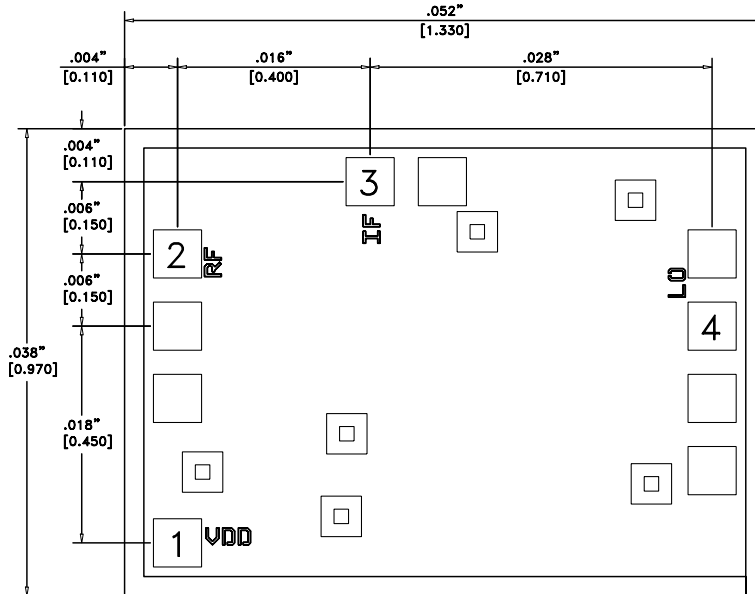

NOTES:


1. ALL DIMENSIONS IN INCHES (MILLIMETERS)
2. ALL TOLERANCES ARE ± 0.001 (0.025)
3. DIE THICKNESS IS 0.004 (0.100) BACKSIDE IS GROUND
4. BOND PADS ARE 0.004 (0.100) SQUARE
5. BOND PAD SPACING, CTR-CTR: 0.006 (0.150)
6. BACKSIDE METALLIZATION: GOLD
7. BOND PAD METALLIZATION: GOLD

Pad Descriptions

| Pad Number | Function | Description | Interface Schematic |
|------------|----------|---|---|
| 1 | Vdd | Power supply for the LO Amplifier. An external RF bypass capacitor of 100 - 330 pF is required. A MIM border capacitor is recommended. The bond length to the capacitor should be as short as possible. The ground side of the capacitor should be connected to the housing ground. | |
| 2 | RF Port | RF Port. This pad is AC coupled and matched to 50 Ohm from 15 - 30 GHz. |  |
| 3 | IF Port | IF Port. This pad is DC coupled and should be DC blocked externally using a series capacitor whose value has been chosen to pass the necessary IF frequency range. Any applied DC voltage to this pin will result in die non-function and possible die failure. |  |
| 4 | LO Port | LO Port. This pad is AC coupled and matched to 50 ohm from 8 - 12 GHz |  |

GaAs MMIC SUB-HARMONICALLY PUMPED MIXER, 17 - 25 GHz

Assembly Diagram

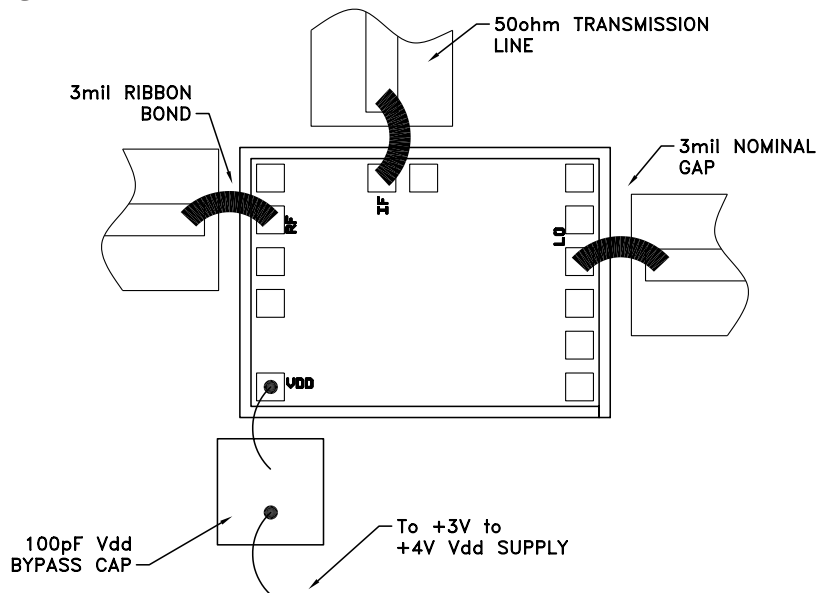



Mounting & Bonding Techniques for Millimeterwave GaAs MMICs

The die should be attached directly to the ground plane eutectically or with conductive epoxy (see HMC general Handling, Mounting, Bonding Note).

50 Ohm Microstrip transmission lines on 0.127mm (5 mil) thick alumina thin film substrates are recommended for bringing RF to and from the chip (Figure 1). If 0.254mm (10 mil) thick alumina thin film substrates must be used, the die should be raised 0.150mm (6 mils) so that the surface of the die is coplanar with the surface of the substrate. One way to accomplish this is to attach the 0.102mm (4 mil) thick die to a 0.150mm (6 mil) thick molybdenum heat spreader (moly-tab) which is then attached to the ground plane (Figure 2).

Microstrip substrates should be brought as close to the die as possible in order to minimize ribbon bond length. Typical die-to-substrate spacing is 0.076mm (3 mils). Gold ribbon of 0.075 mm (3 mil) width and minimal length <0.31 mm (<12 mils) is recommended to minimize inductance on RF, LO & IF ports.

An RF bypass capacitor should be used on the Vdd input. A 100 pF single layer capacitor (mounted eutectically or by conductive epoxy) placed no further than 0.762mm (30 Mils) from the chip is recommended.

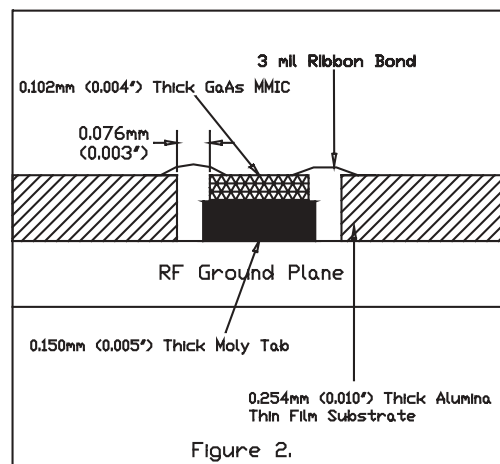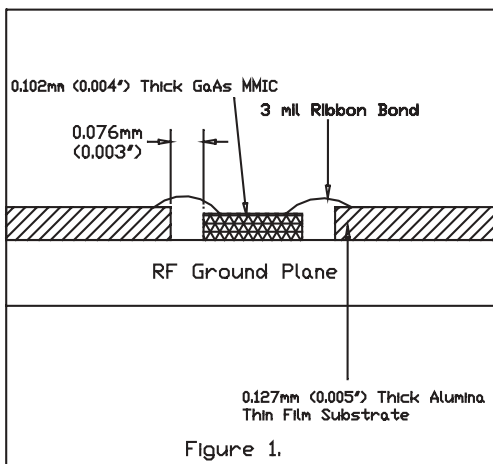

**GaAs MMIC SUB-HARMONICALLY
PUMPED MIXER, 17 - 25 GHz****Handling Precautions**

Follow these precautions to avoid permanent damage.

Cleanliness:

Handle the chips in a clean environment.
DO NOT attempt to clean the chip using liquid cleaning systems.

Static Sensitivity:

Follow ESD precautions to protect against $> \pm 250V$ ESD strikes.

Transients:

Suppress instrument and bias supply transients while bias is applied.
Use shielded signal and bias cables to minimize inductive pick-up.

General Handling:

Handle the chip along the edges with a vacuum collet or with a sharp pair of bent tweezers.
The surface of the chip has fragile air bridges and should not be touched with vacuum collet, tweezers, or fingers.

Mounting

The chip is back-metallized and can be die mounted with AuSn eutectic preforms or with electrically conductive epoxy. The mounting surface should be clean and flat.

Eutectic Die Attach:

A 80/20 gold tin preform is recommended with a work surface temperature of 255 °C and a tool temperature of 265 °C. When hot 90/10 nitrogen/hydrogen gas is applied, tool tip temperature should be 290 °C. DO NOT expose the chip to a temperature greater than 320 °C for more than 20 seconds. No more than 3 seconds of scrubbing should be required for attachment.

Epoxy Die Attach:

Apply a minimum amount of epoxy to the mounting surface so that a thin epoxy fillet is observed around the perimeter of the chip once it is placed into position.
Cure epoxy per the manufacturer's schedule.

Wire Bonding

RF bonds made with 0.003" x 0.0005" ribbon are recommended. These bonds should be thermosonically bonded with a force of 40-60 grams. DC bonds of 0.001" (0.025 mm) diameter, thermosonically bonded, are recommended. Ball bonds should be made with a force of 40-50 grams and wedge bonds at 18-22 grams. All bonds should be made with a nominal stage temperature of 150 °C. A minimum amount of ultrasonic energy should be applied to achieve reliable bonds. All bonds should be as short as possible, less than 12 mils (0.31 mm).