

IL1084

IC OF ADJUSTABLE VOLTAGE REGULATOR OF POSITIVE POLARITY WITH LOW RESIDUAL VOLTAGE AND LOAD CURRENT 5A.

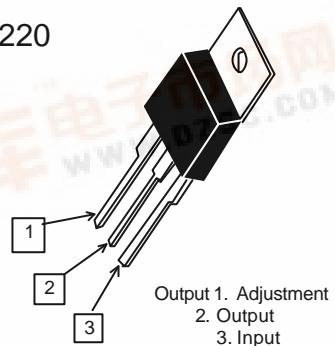
IC IL1084 is a powerful adjustable voltage regulator of positive polarity with low residual voltage and load current 5,5A.

IC of powerful adjustable voltage regulator with low residual voltage lower than 1,5A and reference voltage 1,25 V is purposed for producing constant temperature-stabilized voltage of positive polarity by means of the value set by external resistive divider and used in electronic equipment as a source of stabilized supply.

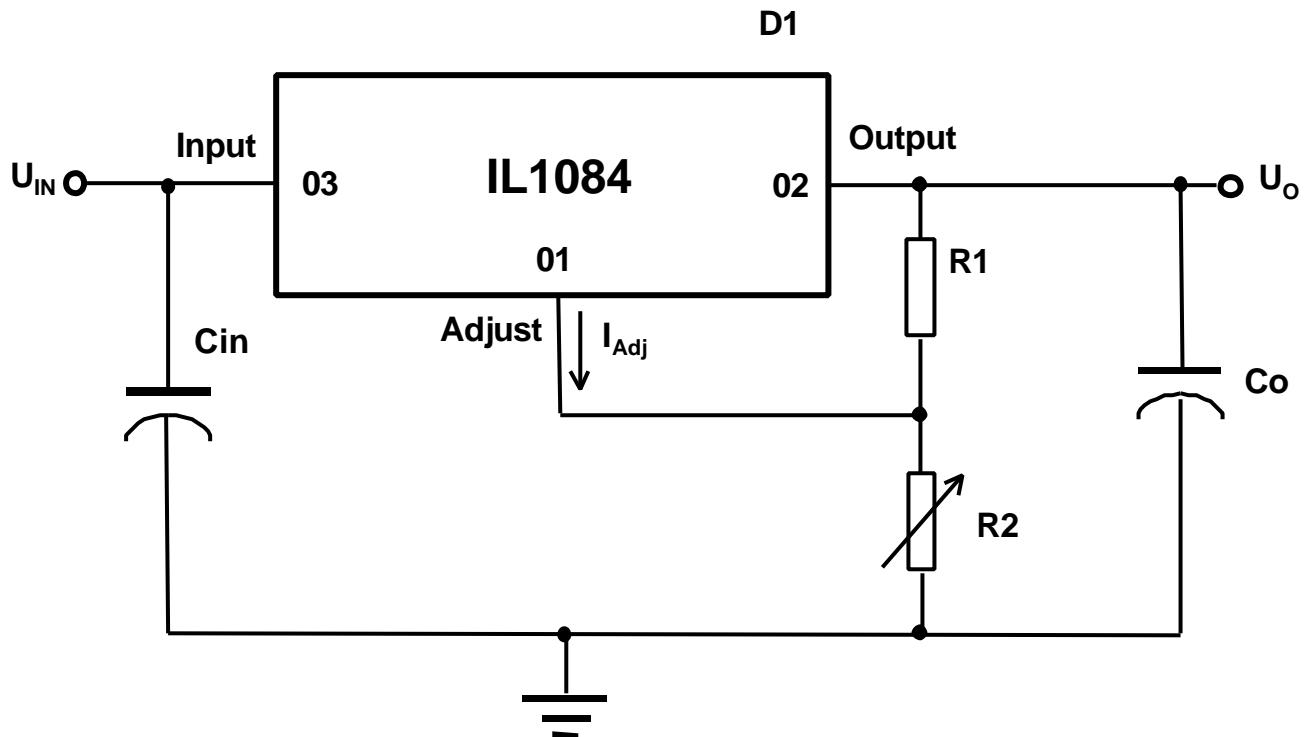
Properties:

- Reference voltage 1,25V
- Output current up to 5,5 A
- Input-output voltage difference, $U_{IN} - U_O$ up to 30 V
- Residual voltage lower than 1,5 V
- Overload protection
- Embedded temperature protection
- Operation range of chip temperature from 0 up to +125°N.

TO-220

**Table 1 – Description of regulator IC pins in 3-pin package Ø 7-220**

Pin No.	Description	Name
01	Adjustment	Adjust
02	Output	Output
03	Input	Input

IL1084


\tilde{N}_1, \tilde{N}_2 – smoothing capacitors, $C_1=10 \text{ m}\mu\text{F}$, $\tilde{N}_2=100 \text{ m}\mu\text{F}$ (Ta),

D_1 - IC,

R_1, R_2 - resistors, $R_1=121 \Omega \pm 1\%$, R_2 – adjusted with accuracy 1%.

Output voltage U_o , V, is defined by formula:

$$U_o = U_{ref} \left(1 + \frac{R_2}{R_1} \right) + I_{Adj} R_2 ,$$

Where U_{ref} - reference voltage, V,

I_{Adj} - adjustment current, $\text{m}\mu\text{A}$.

Since I_{ADJ} has values not more than $120 \text{ m}\mu\text{A}$, inaccuracy dependent on this value for U_o – is minor.

Figure 1 – Connection circuit of adjustable voltage regulator



Korzhenevskogo 12, Minsk, 220064, Republic of Belarus

Fax: +375 (17) 278 28 22,

Phone: +375 (17) 278 07 11, 277 24 70, 277 24 61,

277 69 16

E-mail: belms@belms.belpak.minsk.by

URL: www.bms.by

BELMICROSYSTEMS

IL1084
TABLE 2 - TABLE OF ELECTRICAL CHARACTERISTICS

Characteristic, measurement unit	Symbol	Measurement mode	Standard		Tempera-ture $T_J, ^\circ C$
			min	Max	
Reference voltage, V	U_{ref}	$I_o=10 \text{ A}$ $(U_{IN} - U_o)=3V$ $10 \text{ mA} \leq I_o \leq I_{FULL LOAD}$ $1,5V \leq (U_{IN} - U_o) \leq 25V$	1,238	1,262	25 ± 10
Change of output voltage when input voltage changes, %	Regline	$I_o=10 \text{ mA},$ $1,5V \leq (U_{IN} - U_o) \leq 15V$	-	0,2	$0 \div 125$
		$I_o=10 \text{ mA},$ $15V \leq (U_{IN} - U_o) \leq 30V$	-	0,5	$0 \div 125$
Change of output voltage when load current changes, %	Regload	$(U_{IN} - U_o) = 3V$ $10 \text{ mA} \leq I_o \leq 5A$	-	0,3	25 ± 10
			-	0,4	$0 \div 125$
Residual voltage, V	U_{ds}	$\Delta U_{ref} = 1 \%, I_o = 5A$	-	1,5	$0 \div 125$
Maximum output current, A	$I_{o max}$	$(U_{IN} - U_o) = 5V$ $(U_{IN} - U_o) = 25V$	5,5	-	$0 \div 125$
Minimum output current, mA	$I_{o min}$	$(U_{IN} - U_o) = 25V$	-	10	$0 \div 125$
Thermostabilization, %/W	Regterm	$T_{pal}=30ms T_A=25^\circ C$		0,015	
Pulsation smoothing ratio, dB	RR	$f=120Hz, \tilde{N}_{Adj}=25\text{m}\mu F,$ $\tilde{N}_i=25 \text{ m}\mu F (Ta),$ $I_o = 5A, (U_{IN} - U_o)=3V$	60	-	$0 \div 125$
Adjustment current, mka	I_{Adj}		-	120	$0 \div 125$
Change of adjustment current, mka	ΔI_{Adj}	$10 \text{ mA} \leq I_o \leq I_{FULL LOAD}$ $1,5V \leq (U_{IN} - U_o) \leq 25V$	-	5	$0 \div 125$
Ratio of output voltage temporary instability, %	S	$1000 h; T_J = 125^\circ C$ (when testing)	-	1	25 ± 10

Notes:

- 1 Measurement of electrical characteristics is carried out when capacitance $\tilde{N}_{IN}=10 \text{ m}\mu F$ is connected to the input and $\tilde{N}_i=100 \text{ m}\mu F$ – to the output;
- 2 Reference voltage U_{ref} in adjustable regulator is measured between outputs Output and Adjust on resistance R1 (figure 1);
- 3 Parameters stipulated in table 1 are ensured for constant chip temperature T_J . Measurement of parameters should be performed using heatsink and pulse technique;
- 4 $I_{FULL LOAD}$ – value of maximum output current dependent on input-output voltage difference $(U_{IN} - U_o)$ with power dissipation in package $\hat{E}O-28 - 30 W$.



Korzhenevskogo 12, Minsk, 220064, Republic of Belarus

Fax: +375 (17) 278 28 22,

Phone: +375 (17) 278 07 11, 277 24 70, 277 24 61,

277 69 16

E-mail: belms@belms.belpak.minsk.by

URL: www.bms.by

BELMICROSYSTEMS

IL1084**Table 3 - Typical values of electrical characteristics**

Characteristic, Measurement unit	Symbol	Measurement mode	Typical value
Adjustment current, μ A	I_{Adj}	$T_J = 25^\circ C$	55
Temperature ratio of output voltage instability, %	TS	$T_J = 0 \div 125^\circ C$	0,5
Noise voltage on output, (%)	$U_{n rms}$	$T_J = 25^\circ C$ $10 \text{ Hz} \leq f \leq 10 \text{ kHz}$	0,003

Table 4 - Table of maximum and absolute maximum ratings

Parameter	Measure- ment unit	Maximum ratings		Absolute maxi- mum ratings	
		min	max	min	max
Input-output voltage difference, $U_{IN} - U_O$	V	2,77	30	0	31
Chip temperature, T_J	$^\circ C$	0	125	-65	150
Storage temperature, T_{stg}	$^\circ C$			-65	150



Korzhenevskogo 12, Minsk, 220064, Republic of Belarus

Fax: +375 (17) 278 28 22,

Phone: +375 (17) 278 07 11, 277 24 70, 277 24 61,

277 69 16

E-mail: belms@belms.belpak.minsk.by

URL: www.bms.by

BELMICROSYSTEMS