


# ILA2003

## 10W AUDIO AMPLIFIER

### DESCRIPTION


The main features of ILA 2003, are very low number of external components, easy of assembly, space and cost saving.  
 The device provides a high output current capability (up to 3.5A), very low harmonic and cross-over distortion.  
 Completely safe operation is guaranteed due to protection against DC and AC short circuit between all pins and ground, thermal over-range, load dump voltage up to 40V and open ground.

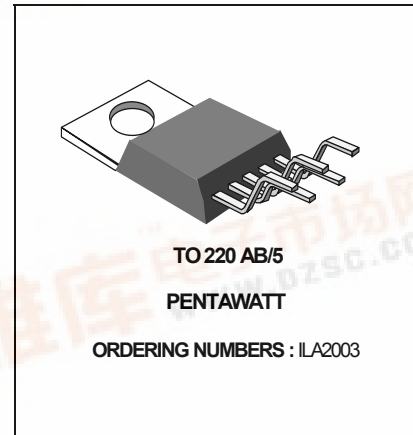

### ABSOLUTE MAXIMUM RATINGS

| Symbol  | Parameter                            | Value      | Unit |
|---------|--------------------------------------|------------|------|
| Vs      | Peak supply voltage (50 ms)          | 40         | V    |
| Vs      | DC supply voltage                    | 28         | V    |
| Vs      | Operating supply voltage             | 18         | V    |
| Io      | Output peak current (repetitive)     | 3.5        | A    |
| Io      | Output peak current (non repetitive) | 4.5        | A    |
| Ptot    | Power dissipation at Tcase =90°C     | 20         | W    |
| Tstg,Tj | Storage and junction temperature     | -40 to 150 | °C   |

### PIN CONNECTION

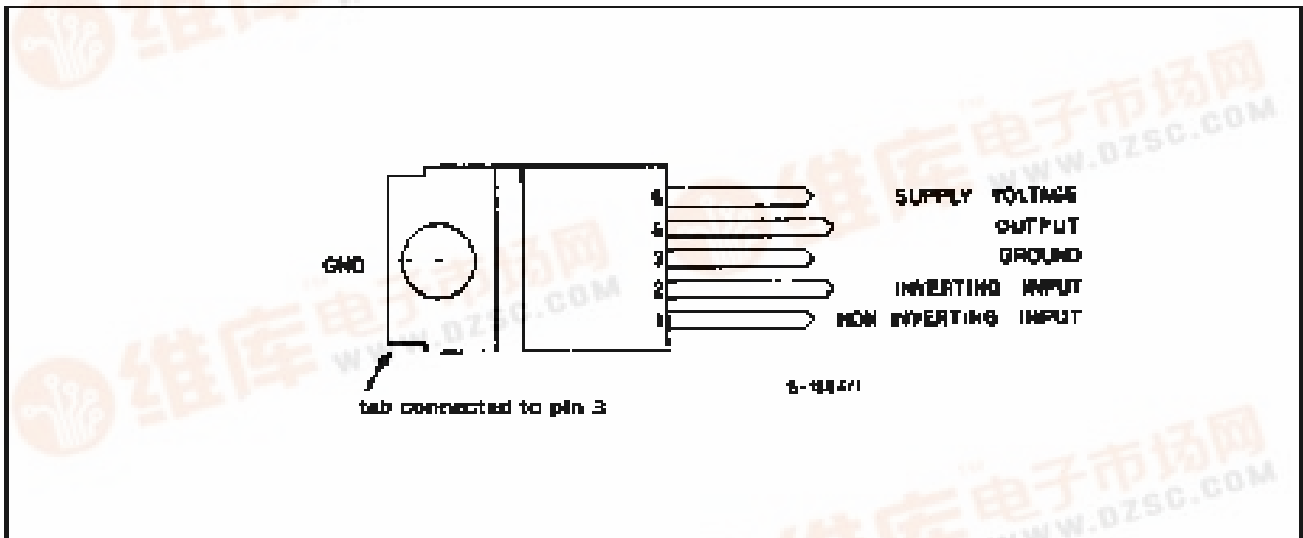

### THERMAL DATA

| Symbol     | Parameter                        | Value | Unit |
|------------|----------------------------------|-------|------|
| Rth-j-case | Thermal resistance junction-case | max 3 | °C/W |

## ILA2003

### ELECTRICAL CHARACTERISTICS ( $V_s = 14.4V$ , $T_{amb} = 25^\circ C$ unless otherwise specified)

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|--------|-----------|-----------------|------|------|------|------|
|--------|-----------|-----------------|------|------|------|------|

#### DC CHARACTERISTICS


|       |                                  |  |     |     |     |    |
|-------|----------------------------------|--|-----|-----|-----|----|
| $V_s$ | Supply voltage                   |  | 8   |     | 18  | V  |
| $V_o$ | Quiescent output voltage (pin 4) |  | 6.1 | 6.9 | 7.7 | V  |
| $I_d$ | Quiescent drain current (pin 5)  |  |     | 44  | 50  | mA |

#### AC CHARACTERISTICS

|                   |                            |   |             |                      |      |                      |
|-------------------|----------------------------|---|-------------|----------------------|------|----------------------|
| $P_o$             | Output power               | $d = 10\%$<br>$f = 1\text{ kHz}$<br>$R_L = 4\Omega$<br>$R_L = 2\Omega$<br>$R_L = 3.2\Omega$<br>$R_L = 1.6\Omega$                              | 5.5<br>9    | 6<br>10<br>7.5<br>12 |      | W<br>W<br>W<br>W     |
| $V_i(\text{rms})$ | Input saturation voltage   |   | 300         |                      |      | mV                   |
| $V_i$             | Input sensitivity          | $f = 1\text{ kHz}$<br>$P_o = 0.5W$ $R_L = 4\Omega$<br>$P_o = 6W$ $R_L = 4\Omega$<br>$P_o = 0.5W$ $R_L = 2\Omega$<br>$P_o 10W$ $R_L = 2\Omega$ |             | 14<br>55<br>10<br>50 |      | mV<br>mV<br>mV<br>mV |
| B                 | Frequency response (-3 dB) | $P_o = 1W$<br>$R_L = 4\Omega$   | 40 to 15000 |                      |      | Hz                   |
| d                 | Distortion                 | $f = 1\text{ kHz}$<br>$P_o = 0.05\text{ to }4.5W$ $R_L = 4\Omega$<br>$P_o = 0.05\text{ to }7.5W$ $R_L = 2\Omega$                              |             | 0,15<br>0,15         |      | %<br>%               |
| $R_i$             | Input resistance (pin1)    | $f = 1\text{ kHz}$  | 70          | 150                  |      | k $\Omega$           |
| $G_v$             | Voltage gain (open loop)   | $f = 1\text{ kHz}$<br>$f = 10\text{ kHz}$   |             | 80<br>60             |      | dB<br>dB             |
| $G_v$             | Voltage gain (closed loop) | $f = 1\text{ kHz}$<br>$R_L = 4\Omega$   | 39,3        | 40                   | 40,3 | dB                   |
| eN                | Input noise voltage        |   |             | 1                    | 5    | $\mu V$              |
| iN                | Input noise current        |   |             | 60                   | 200  | pA                   |
| h                 | Efficiency                 | $f = 1\text{ kHz}$<br>$P_o = 6W$ $R_L = 4\Omega$<br>$P_o 10W$ $R_L = 2\Omega$   |             | 69<br>65             |      | %<br>%               |
| SVR               | Supply voltage rejection   | $f = 100\text{ Hz}$<br>Vripple = 0.5V<br>$R_g = 10\text{ k}\Omega$ $R_L = 4\Omega$  | 30          | 36                   |      | dB                   |

(0) Filter with noise bandwidth: 22 Hz to 22 kHz

CHIP DIAGRAM

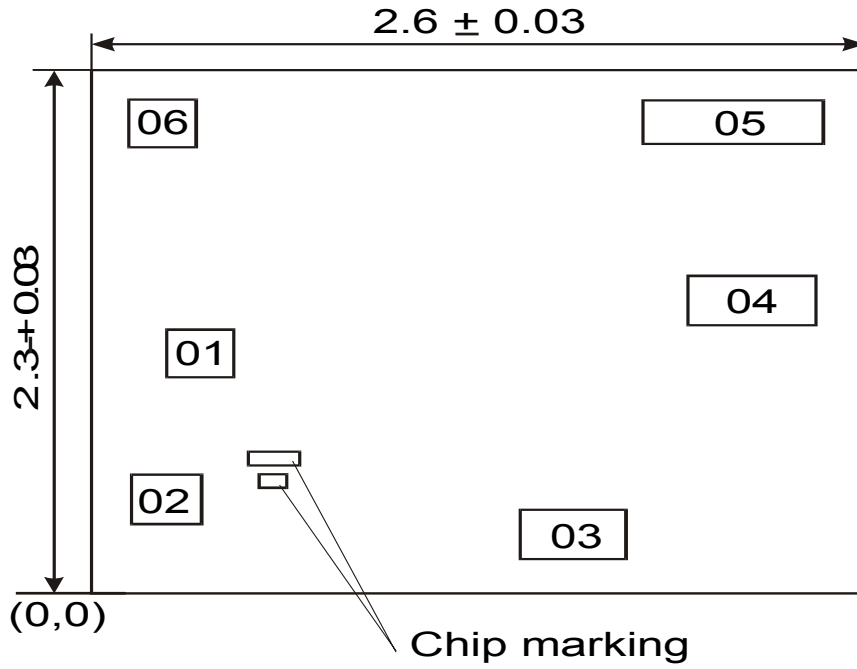

Chip marking (X=0,540, Y=0,530)

YH14

PAD LOCATION

| Pin No | Pad No | Symbol                 | X     | Y     | Pad size (mm) |
|--------|--------|------------------------|-------|-------|---------------|
| 01     | 01     | IN                     | 0.224 | 0.890 | 0.230 x 0.219 |
| 02     | 02     | $\overline{\text{IN}}$ | 0.113 | 0.291 | 0.230 x 0.209 |
| 03     | 03     | GND                    | 1.367 | 0.195 | 0.437 x 0.266 |
| 04     | 04     | OUT                    | 1.985 | 1.078 | 0.500 x 0.238 |
| 05     | 05     | Ud                     | 1.812 | 1.942 | 0.673 x 0.230 |
| 03     | 06     | GND                    | 0.132 | 1.957 | 0.258 x 0.230 |

Pad size is given as per metallization layer

## ILA2003

### PENTAWATT PACKAGE MECHANICAL DATA

| DIM. | mm    |       |      | inch  |       |       |
|------|-------|-------|------|-------|-------|-------|
|      | MIN.  | TYP.  | MAX. | MIN.  | TYP.  | MAX.  |
| A    |       |       | 4.8  |       |       | 0.189 |
| C    |       |       | 1.37 |       |       | 0.054 |
| D    | 2.4   |       | 2.8  | 0.094 |       | 0.110 |
| D1   | 1.2   |       | 1.35 | 0.047 |       | 0.053 |
| E    | 0.35  |       | 0.55 | 0.014 |       | 0.022 |
| F    | 0.8   |       | 1.05 | 0.031 |       | 0.041 |
| F1   | 1     |       | 1.4  | 0.039 |       | 0.055 |
| G    |       | 3.4   |      | 0.126 | 0.134 | 0.142 |
| G1   |       | 6.8   |      | 0.260 | 0.268 | 0.276 |
| H2   |       |       | 10.4 |       |       | 0.409 |
| H3   | 10.05 |       | 10.4 | 0.396 |       | 0.409 |
| L    |       | 17.85 |      |       | 0.703 |       |
| L1   |       | 15.75 |      |       | 0.620 |       |
| L2   |       | 21.4  |      |       | 0.843 |       |
| L3   |       | 22.5  |      |       | 0.886 |       |
| L5   | 2.6   |       | 3    | 0.102 |       | 0.118 |
| L6   | 15.1  |       | 15.8 | 0.594 |       | 0.622 |
| L7   | 6     |       | 6.6  | 0.236 |       | 0.260 |
| M    |       | 4.5   |      |       | 0.177 |       |
| M1   |       | 4     |      |       | 0.157 |       |
| Dia  | 3.65  |       | 3.85 | 0.144 |       | 0.152 |

