


DUAL JFET-INPUT OPERATIONAL AMPLIFIER

SLOS372 – JUNE 2001

- Wide Range of Supply Voltages; Single Supply . . . 3 V to 36 V, or Dual Supplies
- Class AB Output Stage
- High-Impedance N-Channel-JFET Input Stage . . . $10^{12} \Omega$ Typ
- Internal Frequency Compensation
- Short-Circuit Protection
- Input Common Mode Includes V_{CC-}
- Low Input Offset Current . . . 50 pA
- Low Input Bias Current . . . 200 pA Typ

PS PACKAGE
(TOP VIEW)

description

The TL092 JFET-input operational amplifier is similar in performance to the MC3403 family, but with much higher input impedance derived from a FET input stage. The N-channel-JFET input stage allows a common-mode input voltage range that includes the negative supply voltage and offers a typical input impedance of $10^{12} \Omega$, a typical input offset current of 50 pA, and a typical input bias current of 200 pA. This device is designed to operate from a single supply over a range of 3 V to 36 V. Operation from split supplies also is possible, provided the difference between the two supplies is 3 V to 36 V. Output voltage range is from V_{CC-} to $V_{CC+} - 1.3$ V, with a load resistor to V_{CC-} .


The TL092 is characterized for operation from 0°C to 70°C.

AVAILABLE OPTIONS

T_A	PACKAGED DEVICE
	PLASTIC SMALL OUTLINE (PS)
0°C to 70°C	TL092CPSR

The PS package is only available taped and reeled. Add the suffix R to device type for ordering (e.g., TL092CPSR).

symbol




Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

TL092 DUAL JFET-INPUT OPERATIONAL AMPLIFIER

SLOS372 – JUNE 2001

schematic

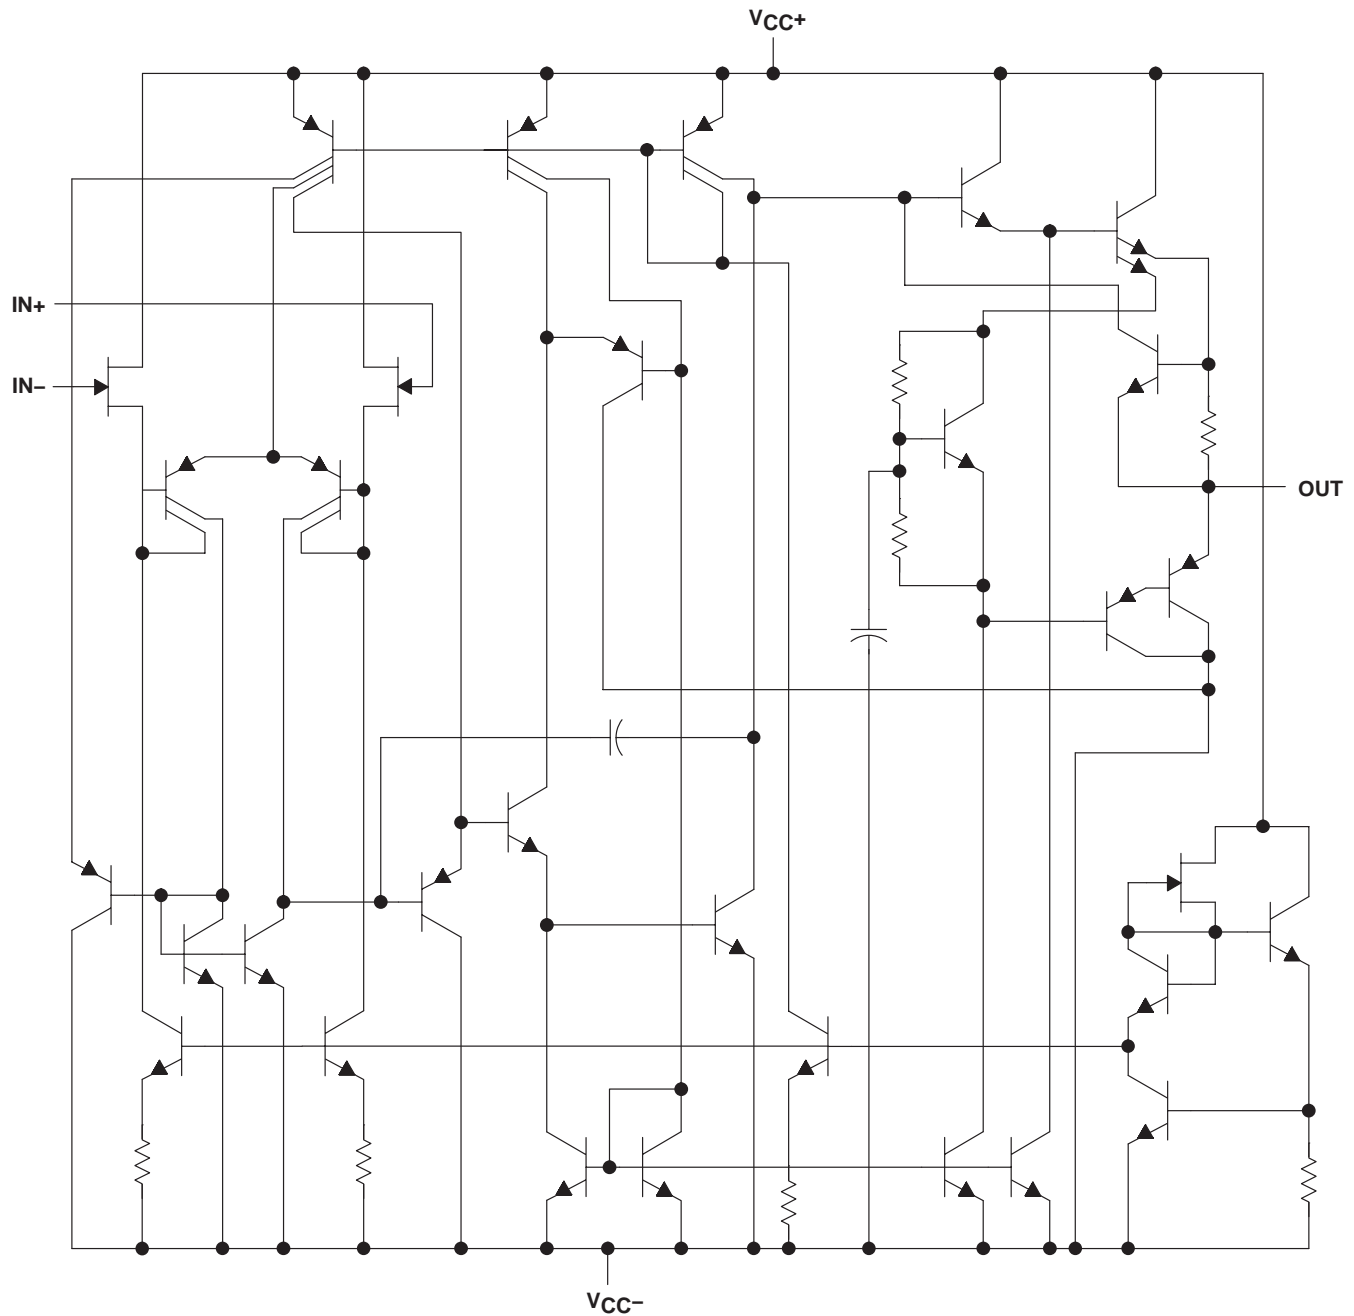

TL092

DUAL JFET-INPUT OPERATIONAL AMPLIFIER

SLOS372 – JUNE 2001

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)[†]

Supply voltage: V_{CC+} (see Note 1)	18 V
V_{CC-} (see Note 1)	–18 V
V_{CC+} with respect to V_{CC-}	36 V
Differential input voltage, V_{ID} (see Note 2)	± 36 V
Input voltage, V_I (see Notes 1 and 3)	± 18 V
Package thermal impedance, θ_{JA} (see Notes 4 and 5)	95°C/W
Lead temperature 1.6 mm (1/16 inch) from case for 10 seconds	260°C
Storage temperature range, T_{stg}	–65°C to 150°C

[†] Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES:
1. All voltage values, except differential voltages, are with respect to the midpoint between V_{CC+} and V_{CC-} .
 2. Differential voltages are at the noninverting input with respect to the inverting input.
 3. Neither input must ever be more positive than V_{CC+} or more negative than $V_{CC-} - 0.3$ V.
 4. Maximum power dissipation is a function of $T_J(\text{max})$, θ_{JA} , and T_A . The maximum allowable power dissipation at any allowable ambient temperature is $P_D = (T_J(\text{max}) - T_A)/\theta_{JA}$. Operating at the absolute maximum T_J of 150°C can impact reliability.
 5. The package thermal impedance is calculated in accordance with JESD 51-7.

recommended operating conditions

	MIN	MAX	UNIT
$V_{CC\pm}$ Supply voltage	3	36	V
T_A Operating free-air temperature range	0	70	°C

TL092

DUAL JFET-INPUT OPERATIONAL AMPLIFIER

SLOS372 – JUNE 2001

electrical characteristics at specified free-air temperature, $V_{CC\pm} = \pm 15$ V
(all characteristics are specified under open-loop conditions, unless otherwise noted)

PARAMETER	TEST CONDITIONS	T_A	MIN	TYP†	MAX	UNIT
V_{IO} Input offset voltage	$R_S = 50\ \Omega$	25°C		5	15	mV
		Full range			20	
αV_{IO} Temperature coefficient of input offset voltage		25°C		10		$\mu V/^\circ C$
I_{IO}^\ddagger Input offset current		25°C		50	200	pA
		Full range			5	nA
I_{IB}^\ddagger Input bias current		25°C		200	400	pA
		Full range			10	nA
V_{ICR} Common-mode input voltage range		25°C	V_{CC-} to 12	V_{CC-} to 13		V
$V_{O(PP)}$ Peak output voltage swing	$R_L = 2\ k\Omega$	25°C	± 10	± 13		V
	$R_L = 10\ k\Omega$	25°C	± 12	± 13.5		
	$R_L = 2\ k\Omega$	Full range	± 10			
A_{VD} Large-signal differential voltage amplification	$R_L = 2\ k\Omega$, $V_O = \pm 10$ V	25°C	20	200		V/mV
		Full range	15			
B_{OM} Maximum output swing bandwidth	$R_L = 2\ k\Omega$, $A_{VD} = 1$, $V_{O(PP)} = 20$ V, THD < 5%	25°C		9		kHz
B_1 Unity gain bandwidth	$R_L = 10\ k\Omega$, $V_O = 50$ mV	25°C		1		MHz
ϕ_m Phase margin	$R_L = 2\ k\Omega$, $C_L = 200$ pF	25°C		60°		
r_i Input resistance	$f = 20$ Hz	25°C		10^{12}		Ω
r_o Output resistance	$f = 20$ Hz	25°C		75		Ω
CMRR Common-mode rejection ratio	$R_S = 50\ \Omega$, $V_{IC} = V_{ICR}$	25°C	70	90		dB
k_{SVR} Supply-voltage rejection ratio ($\Delta V_{CC}/\Delta V_{IO}$)	$R_S = 50\ \Omega$, $V_{CC\pm} = \pm 3$ V to ± 15 V	25°C	75	90		dB
I_{OS} Short-circuit output current		25°C		40		mA
I_{CC} Supply current (per amplifier)	$V_O = 0$, No load	25°C		1.5	2.5	mA

† All typical values are at $T_A = 25^\circ C$.

‡ Input bias currents of a FET-input operational amplifier are normal junction reverse currents, which are temperature sensitive. Pulse techniques that maintain the junction temperature as close to the ambient temperature as possible must be used.

electrical characteristics at specified free-air temperature, $V_{CC+} = 5$ V, $V_{CC-} = 0$ V, $T_A = 25^\circ C$
(unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP†	MAX	UNIT
V_{IO} Input offset voltage	$R_S = 50\ \Omega$, $V_O = 2.5$ V		5	15	mV
I_{IO} Input offset current	$V_O = 2.5$ V		50	200	pA
I_{IB} Input bias current	$V_O = 2.5$ V		200	400	pA
$V_{O(PP)}$ Peak output voltage swing	$R_L = 10\ k\Omega$		3.3	3.5	V
	$R_L = 10\ k\Omega$, $V_{CC+} = 5$ V to 30 V	$V_{CC+} - 1.7$			V
A_{VD} Large-signal differential voltage amplification	$R_L = 2\ k\Omega$, $\Delta V_O = 1.6$ V	20	200		V/mV
k_{SVR} Supply-voltage rejection ratio ($\Delta V_{CC}/\Delta V_{IO}$)	$R_S = 50\ \Omega$, $V_{CC\pm} = \pm 3$ V to ± 15 V	75			dB
I_{CC} Supply current (per amplifier)	$V_O = 2.5$ V, No load		1.5	2.5	mA
V_{O1}/V_{O2} Channel separation	$f = 1$ kHz to 20 kHz		120		dB

† All typical values are at $T_A = 25^\circ C$.

TL092

DUAL JFET-INPUT OPERATIONAL AMPLIFIER

SLOS372 – JUNE 2001

operating characteristics, $V_{CC\pm} = \pm 15\text{ V}$, $T_A = 25^\circ\text{C}$

PARAMETER		TEST CONDITIONS			MIN	TYP	MAX	UNIT
SR	Slew rate at unity gain	$V_I = \pm 10\text{ V}$ (see Figure 1),	$C_L = 100\text{ pF}$,	$R_L = 2\text{ k}\Omega$		0.6		$\text{V}/\mu\text{s}$
t_r	Rise time	$\Delta V_O = 50\text{ mV}$ (see Figure 1),	$C_L = 100\text{ pF}$,	$R_L = 2\text{ k}\Omega$		0.2		μs
t_f	Fall time	$\Delta V_O = 50\text{ mV}$ (see Figure 1),	$C_L = 100\text{ pF}$,	$R_L = 2\text{ k}\Omega$		0.2		μs
	Overshoot factor	$\Delta V_O = 50\text{ mV}$ (see Figure 1),	$C_L = 100\text{ pF}$,	$R_L = 2\text{ k}\Omega$		20%		
	Crossover distortion	$V_{IPP} = 30\text{ mV}$, $V_{O(PP)} = 2\text{ V}$,	$f = 10\text{ kHz}$			1%		
V_n	Equivalent input noise voltage	$R_S = 100\text{ }\Omega$,	$f = 1\text{ kHz}$			34		$\text{nV}/\sqrt{\text{Hz}}$

PARAMETER MEASUREMENT INFORMATION

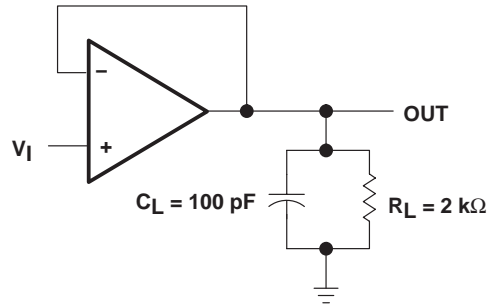


Figure 1. Unity-Gain Amplifier

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DSP	dsp.ti.com
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com

Applications

Audio	www.ti.com/audio
Automotive	www.ti.com/automotive
Broadband	www.ti.com/broadband
Digital Control	www.ti.com/digitalcontrol
Military	www.ti.com/military
Optical Networking	www.ti.com/opticalnetwork
Security	www.ti.com/security
Telephony	www.ti.com/telephony
Video & Imaging	www.ti.com/video
Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments
Post Office Box 655303 Dallas, Texas 75265