

Monolithic Linear IC

<b>SANYO</b>	No. 4281	<b>LA5602</b>
	<b>Low-Dropout Voltage Regulator with Reset and On-Off Function</b>	

### Overview

The LA5602 incorporates both a 5.0V voltage regulator function and reset generator function into a single-chip for micro controller power supply application. The LA5602 supports improvements in efficiency and set compactness by permitting operation at low input-output voltage differences.

### Functions

- Low dropout regulator with 350mA and 5.0V output
- Power supply reset generator function
- Supports on-off control of 5V using equipped enable pin (high active)

### Features

- Low minimal input-output voltage difference (0.5V typ.)
- Supports setting of reset output delay time using external capacitor
- Built-in fold back current limiting circuit and excessive heat protection circuit
- Reset output using active pull-up for simpler noise reduction

### Specifications

#### Maximum Ratings at Ta = 25°C

Maximum input voltage	V <sub>IN</sub> max	18	V
Enable pin voltage	V <sub>EN</sub> max	V <sub>IN</sub> max	V
Reset output pin voltage	V <sub>RES</sub> max	18	V
Allowable power dissipation	Pd max	1.5	W
Operating temperature	T <sub>opr</sub>	-30 to +80	°C
Storage temperature	T <sub>stg</sub>	-55 to +150	°C

#### Operating Conditions at Ta = 25°C

Input voltage	V <sub>IN</sub>	5.6 to 17	V
Output current	I <sub>OUT</sub>	0 to 350	mA
Reset output source current	I <sub>ORH</sub>	0 to 200	μA
Reset output synch current	I <sub>ORL</sub>	0 to 2	mA

Operating Characteristics at Ta = 25°C, V<sub>IN</sub> = 8 V, I<sub>OUT</sub> = 350 mA, C<sub>OUT</sub> = 47μF, according to specified Test Circuit



#### [Power Supply Section]

	min	typ	max	unit	
Output voltage	V <sub>OUT</sub>	4.75	5.0	5.25	V
Drop-out voltage	V <sub>DROP</sub>		0.5	1.0	V
Line regulation	ΔV <sub>OLN</sub>	5.6SV <sub>IN</sub> ≤17V	20	100	mV
Load regulation	ΔV <sub>OLD</sub>	5mA≤I <sub>O</sub> ≤350mA	50	150	mV

### Package Dimensions

unit : mm

3075-SIP7H

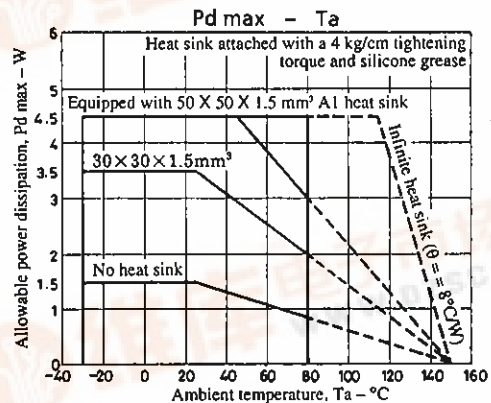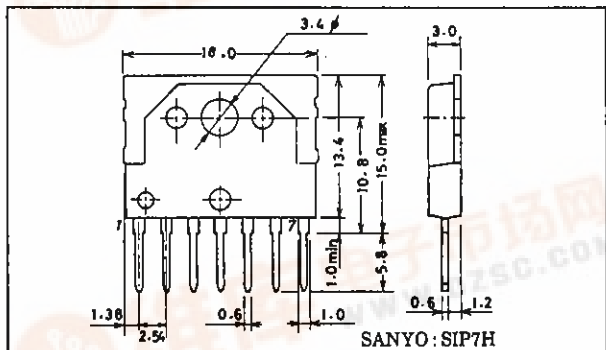

Continued on next page.



## LA5602

Continued from preceding page.


			min	typ	max	unit
Peak output current	$I_{OP}$		350	500		mA
Output short current	$I_{OSC}$			100	400	mA
Current dissipation	$I_{Q1}$	$I_{OUT} = 0$		2.1	4	mA
	$I_{Q2}$			10	50	mA
Output noise voltage	$V_{NS}$	$10\text{Hz} \leq f \leq 100\text{kHz}$		70		$\mu\text{Vrms}$
Temperature coefficient of output voltage	$\Delta V_O / \Delta T_a$	$T_j = 25 \text{ to } 125^\circ\text{C}$		1.6		$\text{mV}/^\circ\text{C}$
Ripple rejection	$R_{ref}$	$f = 120\text{Hz}, 6\text{V} \leq V_{IN} \leq 17\text{V}$		60		dB
Output on-control voltage	$V_{ENH}$		2.6			V
Output off-control voltage	$V_{ENL}$				1.0	V
Low output voltage	$V_{OFF}$				0.3	V

### [Reset Section]

High reset output voltage	$V_{ORH}$	$I_{ORH} = 200\mu\text{A}, \text{Cd pin open}$	4.73	4.98	5.23	V
Low reset output voltage	$V_{ORL}$	$I_{SRL} = 2\text{mA}, \text{Cd - GND shorted}$		100	200	mV
Reset threshold voltage	$V_{RT}$		3.95	4.2	4.45	V
Reset hysteresis voltage	$V_{hys}$		50	100	200	mV
Reset output delay time	$t_d$	$\text{Cd} = 0.1\mu\text{F}$	7.5	10	12.5	ms


### Equivalent Circuit Block Diagram

Unit (resistance:  $\Omega$ )

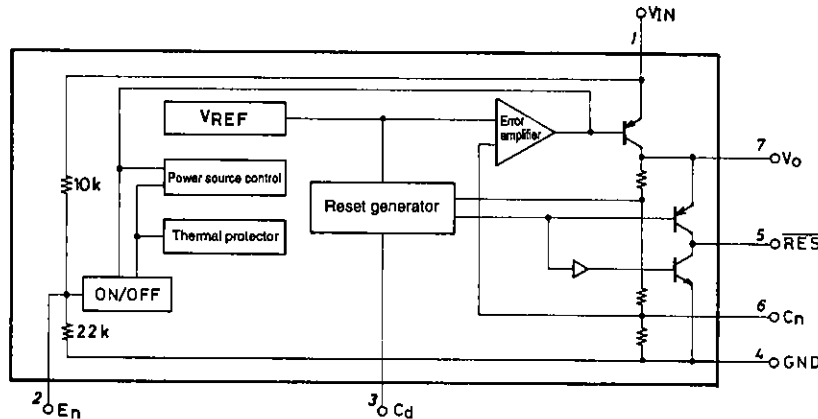


### Specified Test Circuit

Unit (capacitance: F)

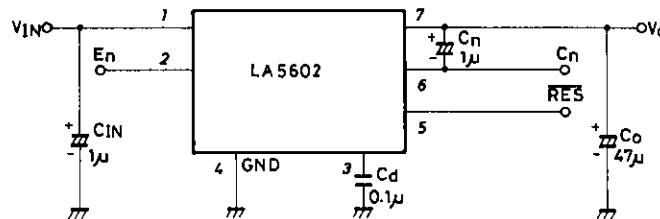

### Application Circuit Example

Unit (capacitance: F)

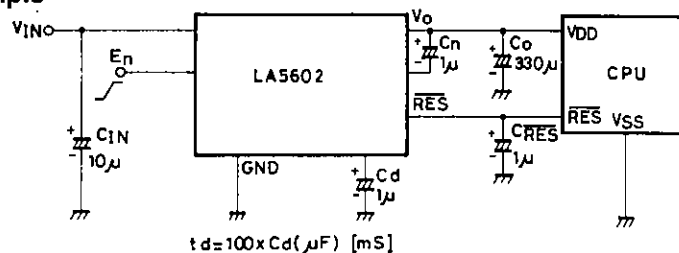


- Notes:
- 1) Capacitors  $C_n$  and  $C_{RES}$  are only required if problems are experienced with noise from external sources. If capacitor  $C_n$  is present, ensure that  $C_o$  is at least more than one-third of the value of  $C_{in}$  in order to prevent output noise at power-down due to capacitor discharge timing.
  - 2) Use a low temperature coefficient capacitor for the delay time capacitor  $C_d$ .
  - 3) The minimum recommended value of output capacitor  $C_o$  is  $47\mu\text{F}$ .


Function Table

$V_{IN}$	$V_O$
L	L
H	H

\*  $V_{EN}$  = high or open






Enable Input Equivalent Circuit




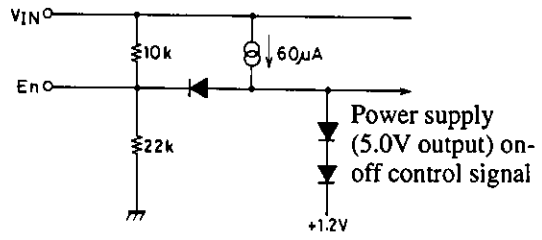


Unit (resistance:  $\Omega$ )

Reset Operation

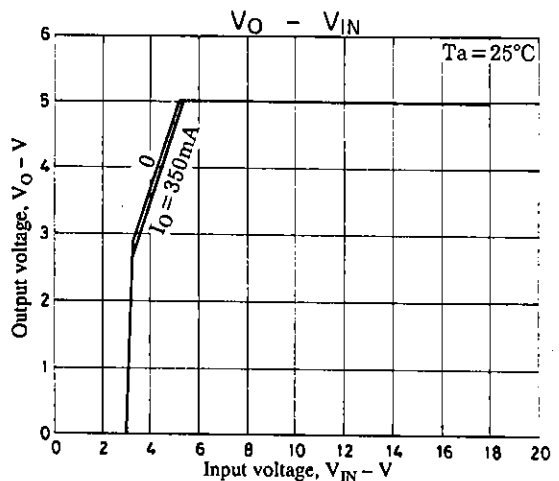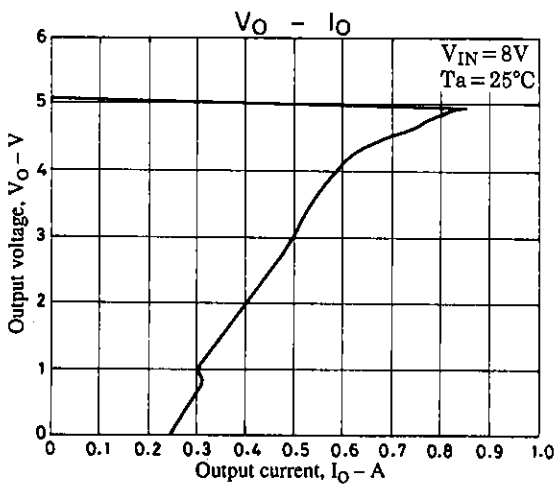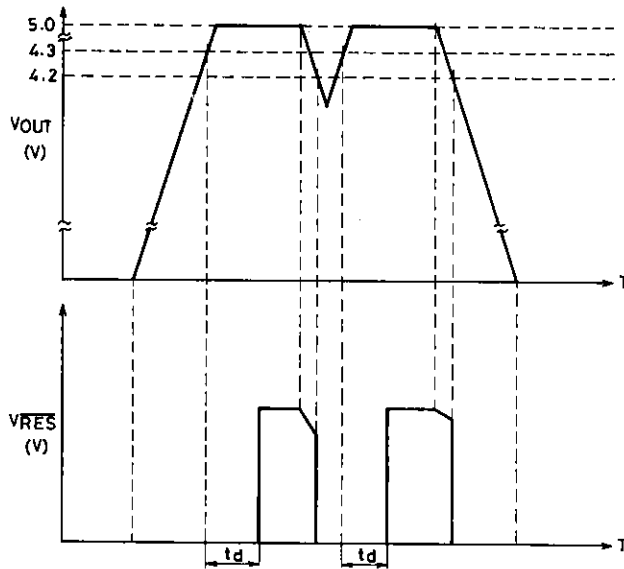

LA5602

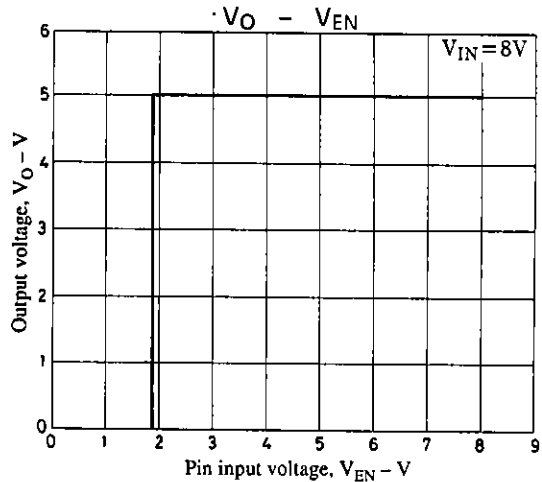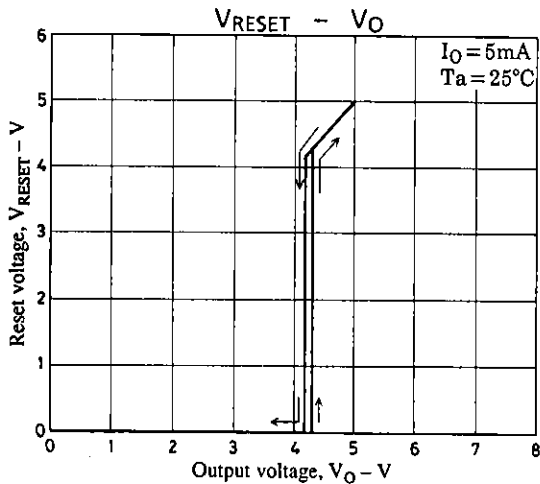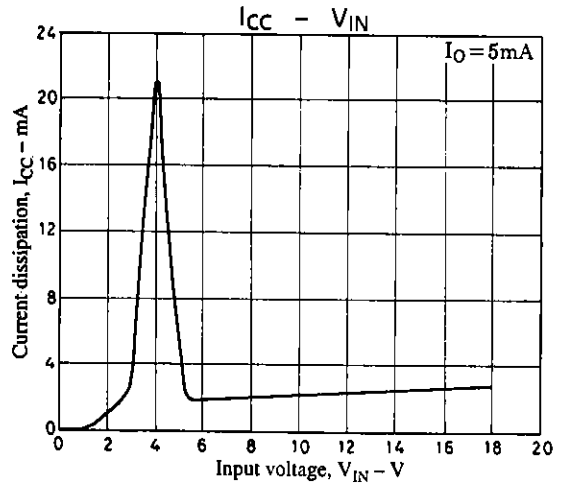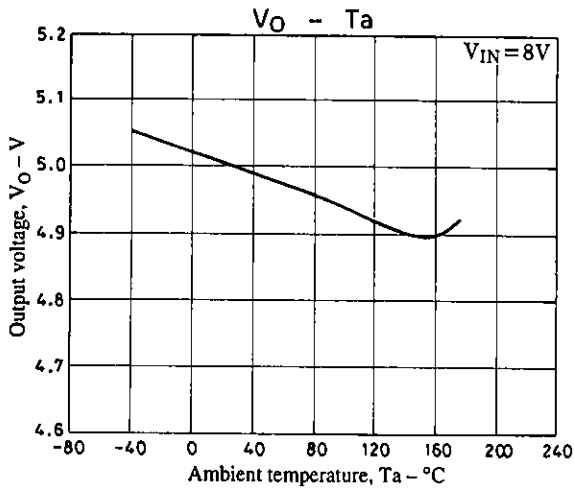

■ No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.

■ Anyone purchasing any products described or contained herein for an above-mentioned use shall:

- ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
- ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.