

December 1994

LP265/LP365 Micropower Programmable Quad Comparator

General Description

The LP365 consists of four independent voltage comparators. The comparators can be programmed, four at the same time, for various supply currents, input currents, response times and output current drives. This is accomplished by connecting a single resistor between the V_{CC} and I_{SET} pins.


These comparators can be operated from split power supplies or from a single power supply over a wide range of voltages. The input can sense signals at ground level even with single supply operation. The unique output NPN transistor stages are uncommitted to either power supply. They can be connected directly to various logic system supplies so that they are highly flexible to interface with various logic families.

Application areas include battery power circuits, threshold detectors, zero crossing detectors, simple serial A/D converters, VCO, multivibrators, voltage converters, power sequencers, and high performance V/F converters, and RTD linearization.


Features

- Single programming resistor to tailor power consumption, input current, speed and output current drive capability
- Wide single supply voltage range or dual supplies (4 V_{DC} to 36 V_{DC} or ±2.0 V_{DC} to ±18 V_{DC})
- Low supply current drain (10 μA) and low power consumption (10 μW/comparator) @ I_{SET} = 0.5 μA V_{CC} = 5VDC
- Uncommitted output stage—selectable output levels
- Output directly compatible with DTL, TTL, CMOS, MOS or other special logic families
- Input common-mode range includes ground
- Differential input voltage equal to the power supply voltage

Typical Connection



Connection Diagram

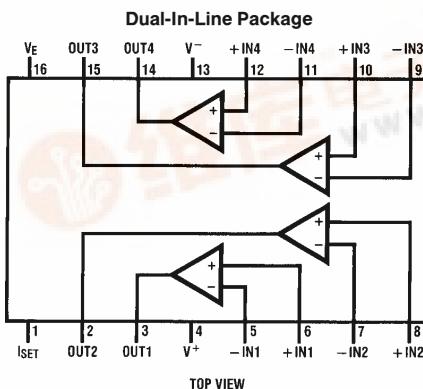

Programming Equation

$$I_{SET} = \frac{(V^+) - (V^-) - 1.3V}{R_{SET}}$$

$$I_{SUPPLY} \approx 22 \times I_{SET}$$

Order Number LP365M, LP365AN or LP365N
See NS Package Numbers M16A or N16A

Absolute Maximum Ratings

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

| | | M Package | N Package |
|---|--|-----------------------------------|--|
| Supply Voltage | 36 V _{DC} or ± 18 V _{DC} | Power Dissipation (Note 3) | 500 mW |
| Differential Input Voltage | ± 36 V _{DC} | T _j Max | 115°C |
| Input Voltage (Note 1) | -0.3V to +36 V _{DC} | θ_{jA} | 115°C/W |
| Output Short Circuit to V _E (Note 2) | Continuous | Lead Temp. (Soldering—10 sec.) | 260°C |
| V _{OUT} with Respect to V _E | $V_E - 7V \leq V_{OUT} \leq V_E + 36V$ | (Vapor Phase—60 sec.) | 215°C |
| ESD Tolerance (Note 10) | 2000V | (Infrared—15 sec.) | 220°C |
| | | Operating Temp. Range LP365: | $0^\circ\text{C} \leq T_A \leq +70^\circ\text{C}$ |
| | | Storage Temp. Range | $-40^\circ\text{C} \leq T_A \leq +150^\circ\text{C}$ |

Electrical Characteristics (Note 4) Low power V_S=5V, I_{SET}=10 μA

| Symbol | Parameter | Conditions | LP365A | | | LP365 | | | Units (Limit) |
|-------------------|---------------------------------|---|--------|-----------------------------|-----------------------------|-------|-----------------------------|-----------------------------|------------------|
| | | | Typ | Tested Limit (Note 5) | Design Limit (Note 6) | Typ | Tested Limit (Note 5) | Design Limit (Note 6) | |
| V _{OS} | Input Offset Voltage | V _{CM} =0V, R _S =100 | 1 | 3 | 6 | 3 | 6 | 9 | mV (Max) |
| I _{OS} | Input Offset Current | V _{CM} =0V LP265 | 2 | 20 | 50 | 4 | 25 | 75 | nA (Max) |
| | | | | | | 4 | 25 | 150 | |
| I _B | Input Bias Current | V _{CM} =0V LP265 | 10 | 50 | 125 | 15 | 75 | 200 | nA (Max) |
| | | | | | | 15 | 75 | 300 | |
| A _{VOL} | Large Signal Voltage Gain | R _L =100k | 500 | 50 | 50 | 300 | 25 | 25 | V/mV (Min) |
| V _{CM} | Input Common-Mode Voltage Range | | | 0 | 0 | | 0 | 0 | V (Max) |
| | | | | 3 | 3 | | 3 | 3 | V (Min) |
| CMRR | Common-Mode Rejection Ratio | 0≤V _{CM} ≤3V | 85 | 75 | 70 | 80 | 75 | 70 | dB (Min) |
| PSRR | Supply Voltage Rejection Ratio | $\pm 2.5V \leq V_S \leq \pm 3.5V$ | 75 | 65 | 65 | 70 | 65 | 65 | dB (Min) |
| I _S | Supply Current | All Inputs=0V, R _L =∞ | 215 | 250 | 300 | 225 | 275 | 300 | μA (Max) |
| V _{OH} | Output Voltage High | V _C =5V, V _E =0V, R _L =100k | | 4.9 | 4.5 | | 4.9 | 4.5 | V (Min) |
| V _{OL} | Output Voltage Low | V _E =0V | | 0.4 | 0.4 | | 0.4 | 0.4 | V (Max) |
| I _{SINK} | Output Sink Current | V _E =0V, V _O =0.4V | 2.4 | 1.2 | 0.6 | 2.0 | 0.8 | 0.4 | mA (Min) |
| I _{LEAK} | Output Leakage Current | V _C =5V, V _E =0V | 2 | 50 | 5000 | 2 | 100 | 5000 | nA (Max) |
| t _R | Response Time | V _{CC} =5V, V _E =0V, R _L =5k, C _L =10 pF (Note 7) | | 4 | | | 4 | | μs |

Electrical Characteristics (Continued) (Note 8) High power $V_S = \pm 15V$, $I_{SET} = 100 \mu A$

| Symbol | Parameter | Conditions | LP365A | | | LP365 | | | Units (Limit) |
|------------|---------------------------------|---|--------|-----------------------|-----------------------|-------|-----------------------|-----------------------|---------------|
| | | | Typ | Tested Limit (Note 5) | Design Limit (Note 6) | Typ | Tested Limit (Note 5) | Design Limit (Note 6) | |
| V_{OS} | Input Offset Voltage | $V_{CM}=0V$, $R_L=100$ | 1 | 3 | 6 | 3 | 6 | 9 | mV (Max) |
| I_{OS} | Input Offset Current | $V_{CM}=0V$, LP265 | 5 | 50 | 100 | 10 | 90 | 200 | nA (Max) |
| I_B | Input Bias Current | $V_{CM}=0V$, LP265 | 60 | 200 | 500 | 80 | 300 | 500 | nA (Max) |
| A_{VOL} | Large Signal Voltage Gain | $R_L=15k$ | 500 | 100 | 100 | 500 | 100 | 100 | V/mV (Min) |
| V_{CM} | Input Common-Mode Voltage Range | | | -15 | -15 | | -15 | -15 | V (Max) |
| | | | | 13 | 13 | | 13 | 13 | V (Min) |
| CMRR | Common-Mode Rejection Ratio | $-15V \leq V_{CM} \leq 13V$ | 85 | 75 | 70 | 80 | 75 | 70 | dB (Min) |
| PSRR | Supply Voltage Rejection Ratio | $\pm 10V \leq V_S \leq \pm 15V$ | 80 | 70 | 70 | 75 | 70 | 70 | dB (Min) |
| I_S | Supply Current | All Inputs = 0V, $R_L = \infty$, LP265 | 2.6 | 3 | 3.3 | 2.8 | 3.5 | 3.7 | mA (Max) |
| | | | | | | 2.8 | 3.5 | 4.3 | mA (Max) |
| V_{OH} | Output Voltage High | $V_C=5V$, $V_E=0V$, $R_L=100k$ | | 4.9 | 4.5 | | 4.9 | 4.5 | V (Min) |
| V_{OL} | Output Voltage Low | $V_E=0V$ | | 0.4 | 0.4 | | 0.4 | 0.4 | V (Max) |
| I_{SINK} | Output Sink Current | $V_E=0V$, $V_O=0.4V$ | 10 | 8 | 5.5 | 7.5 | 6 | 4 | mA (Min) |
| I_{LEAK} | Output Leakage Current | $V_C=15V$, $V_E=-15V$ | 5 | 50 | 5000 | 5 | 50 | 5000 | nA (Max) |
| t_R | Response Time | $V_{CC}=5V$, $V_E=0V$, $R_L=5k$, $C_L=10 \mu F$ (Note 7) | 1.0 | | | 1.0 | | | μs |

Note 1: The input voltage is not allowed to go 0.3V above V^+ or -0.3V below V^- as this will turn on a parasitic transistor causing large currents to flow through the device.

Note 2: Short circuits from the output to V^+ may cause excessive heating and eventual destruction. The current in the output leads and the V_E lead should not be allowed to exceed 30 mA. The output should not be shorted to V^- if $V_E \leq (V^-) + 7V$.

Note 3: For operating at elevated temperatures, these devices must be derated based on a thermal resistance of θ_{JA} and T_j max. $T_j = T_A + \theta_{JA}P_D$.

Note 4: Boldface numbers apply at temperature extremes. All other numbers apply at $T_A = T_j = 25^\circ C$. $V^+ = +15V$, $V^- = -15V$, $I_{SET} = 100 \mu A$, $R_L = 100k$, and $V_C = 5V$ as shown in the Typical Connection diagram.

Note 5: Guaranteed and 100% production tested.

Note 6: Guaranteed (but not 100% production tested) over the operating temperature and supply voltage ranges. These limits are not used to calculate out-going quality levels.











Note 7: The response time specified is for a 100 mV input step with 5 mV overdrive.

Note 8: Boldface numbers apply at temperature extremes. All other numbers apply at $T_A = T_j = 25^\circ C$. $V^+ = +15V$, $V^- = -15V$, $I_{SET} = 100 \mu A$, $R_L = 100k$, and $V_C = 5V$ as shown in the Typical Connection diagram.

Note 9: See AN-450 "Surface Mounting Methods and Their Effect on Product Reliability" for other methods of soldering surface mount devices.


Note 10: Human body model, 1.5 k Ω in series with 100 pF.

Typical Performance Characteristics




Typical Applications

Gated 4-Phase Oscillator

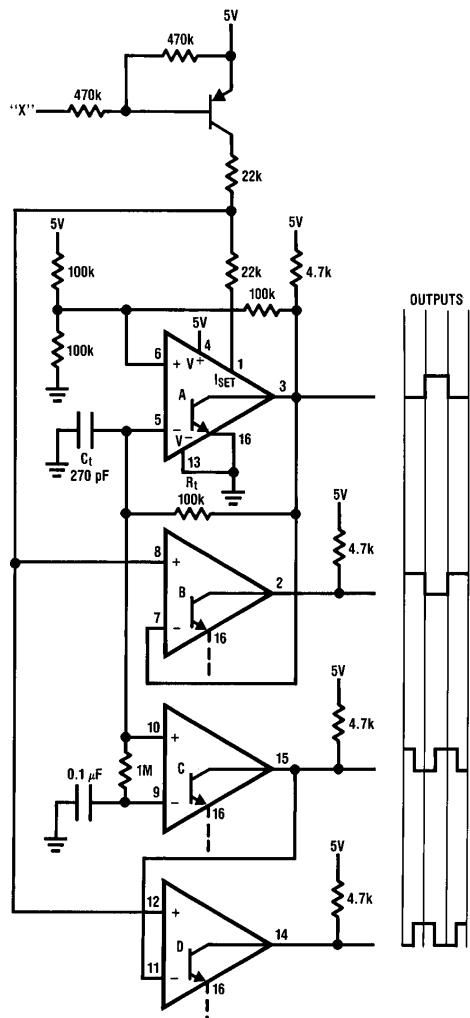

"Voting" Comparator

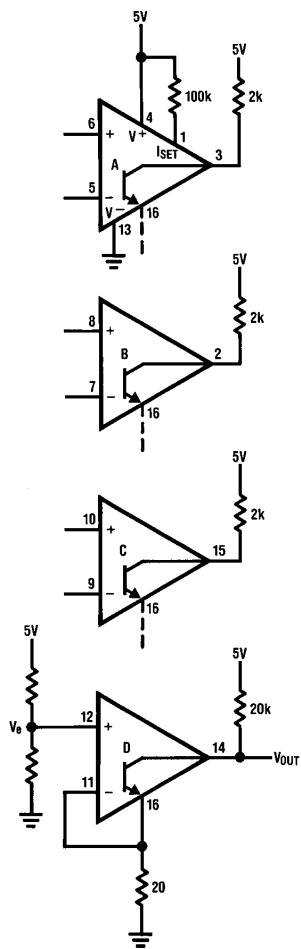

TL/H/5023-4

TL/H/5023-5

$$f = 20 \text{ kHz}$$


$$f = \frac{1}{1.6 \cdot R_t \cdot C_t}$$

All four phases run when X is low. When X is high, oscillation stops and power drain is zero.

If $V_E = 0.25V$, then V_{OUT} will be low if 1 of the 3 other outputs are low. Choice of $V_E = 0.50V$ causes V_{OUT} to be low if 2 of the 3 other outputs are low; $V_E = 0.75V$ will cause V_{OUT} to be low if all 3 other outputs are low.

Typical Applications (Continued)


Ordinary Hysteresis



TL/H/5023-6

It is a good practice to add a few millivolts of positive feedback to prevent oscillation when the input voltage is near the threshold.


Hysteresis from Emitter



TL/H/5023-7

Positive feedback from the emitter can also prevent oscillations when V_{IN} is near the threshold.


Bar-Graph Display

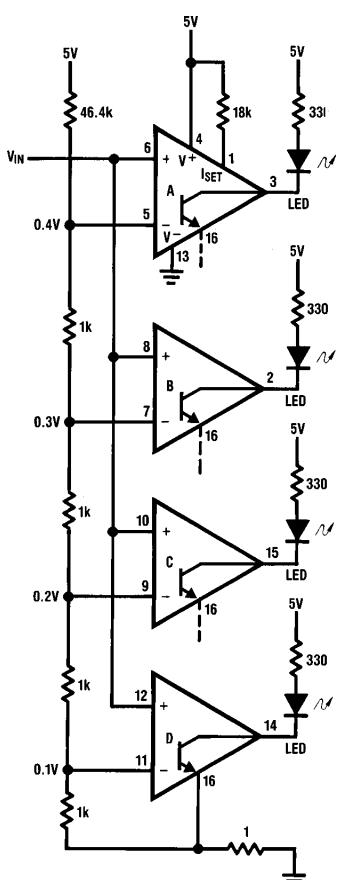

TL/H/5023-8

The positive feedback from pin 16 provides hysteresis.

Level-Sensitive Strobe

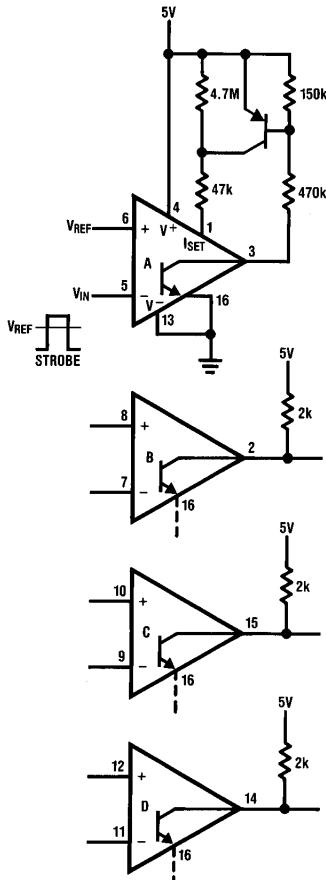


TL/H/5023-9

Comparators B, C, and D do not respond until activated by the signal applied to comparator A.

Typical Applications (Continued)


Slow Op Amp (Inverter)

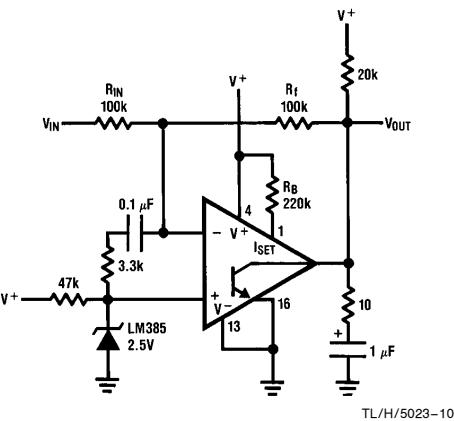

$$R_B = V^+ / 20 \mu\text{A}$$

Unlike most comparators, the LP365 can be used as an op amp, if suitable R-C damping networks are used.


Slow Op Amp (Unity-Gain Follower)

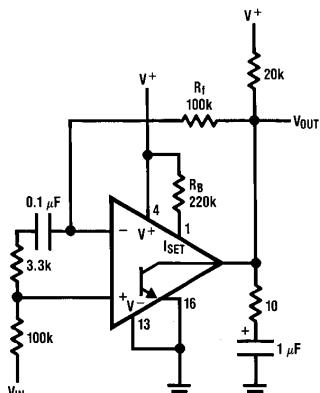

$$R_B = V^+ / 20 \mu\text{A}$$


The LP365 can also be used as a high-input-impedance follower-amplifier with the damping components shown.

Chopping Outputs

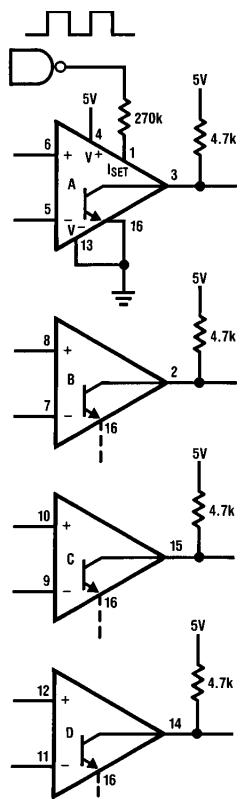

Chopping the outputs by modulating the I_{SET} current allows data to be transmitted via opto-couplers, transformers, etc.

Low Battery Detector

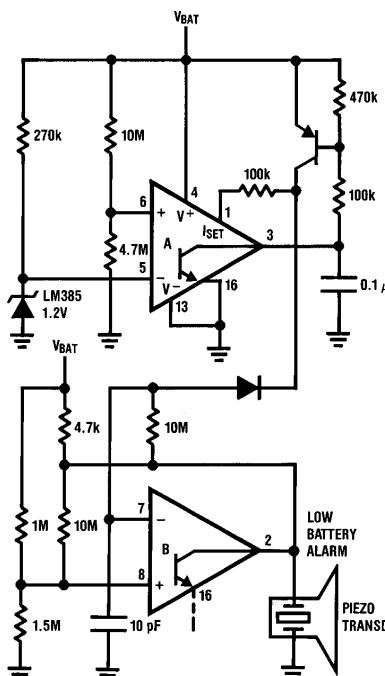


$$I_S @ 6V = 45 \mu\text{A}$$

$$I_S @ 3.8V = 1 \mu\text{A}$$

$$f = 3 \text{ kHz}$$

Comparator A detects when the supply voltage drops to 4V and enables comparator B to drive a piezoelectric alarm.


Simplified Schematic

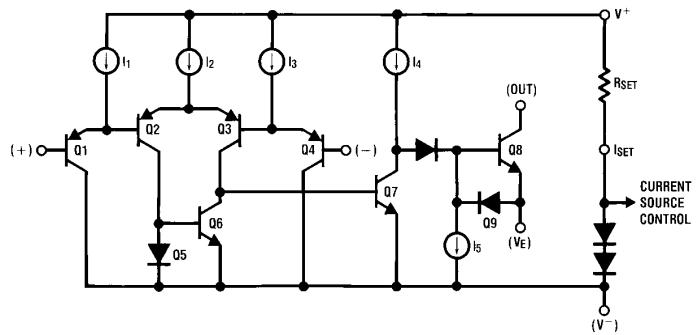

TL/H/5023-14


Current sources are programmed by I_{SET}
V_E is common to all 4 comparators

Physical Dimensions inches (millimeters)

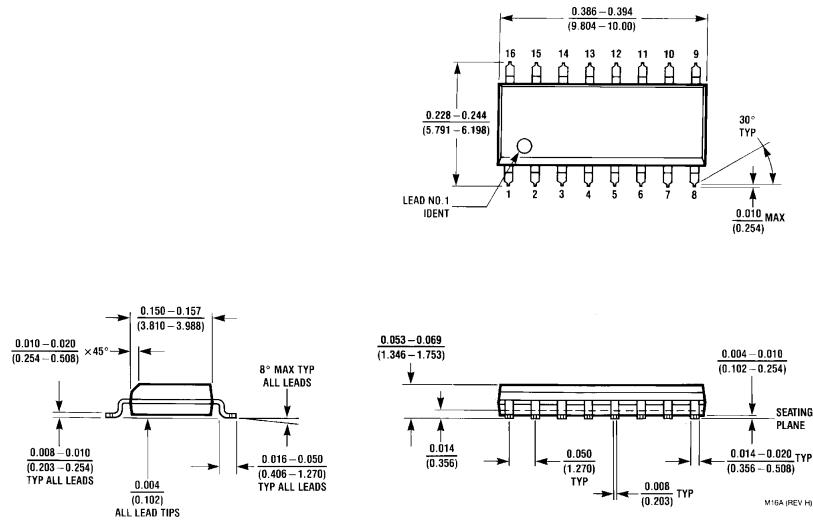

Plastic Surface-Mount Package (M)
Order Number LP365M
NS Package Number M16A

Physical Dimensions inches (millimeters) (Continued)

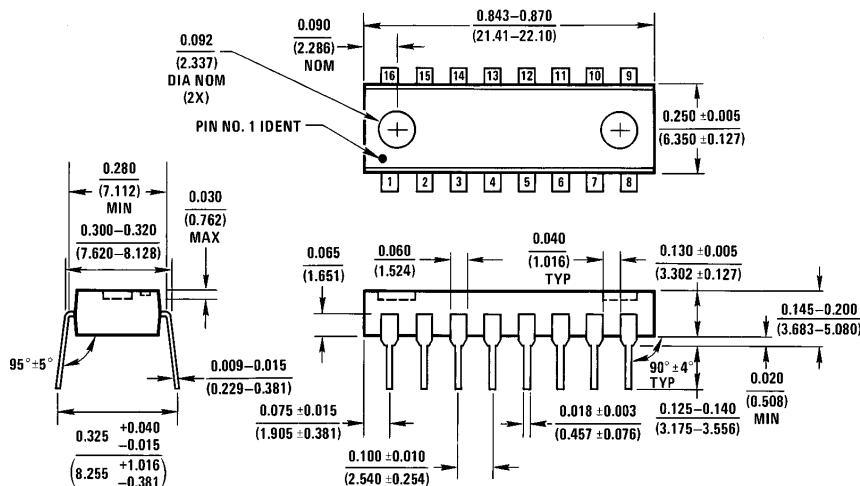

N16A (REV E)

**Molded Dual-In-Line Package (N)
Order Number LP365AN or LP365N
NS Package Number N16A**

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



**National Semiconductor
Corporation**
1111 West Bardin Road
Arlington, TX 76017
Tel: (1800) 272-9959
Fax: (1800) 737-7018

**National Semiconductor
Europe**
Fax: (+49) 0-180-530 85 86
Email: cnjwge@tevm2.nsc.com
Deutsch Tel: (+49) 0-180-530 85 85
English Tel: (+49) 0-180-532 78 32
Français Tel: (+49) 0-180-532 93 58
Italiano Tel: (+49) 0-180-534 16 80

**National Semiconductor
Hong Kong Ltd.**
13th Floor, Straight Block,
Ocean Centre, 5 Canton Rd.
Tsimshatsui, Kowloon
Hong Kong
Tel: (852) 2737-1600
Fax: (852) 2736-9960

**National Semiconductor
Japan Ltd.**
Tel: 81-043-299-2309
Fax: 81-043-299-2408