



## LOW DROPOUT VOLTAGE REGULATOR WITH ON/OFF CONTROL


### ■ GENERAL DESCRIPTION

The NJM2370 is a low dropout voltage regulator with ON/OFF control.

It features dropout voltage of 0.1V at  $I_o=30mA$ , low output noise and high ripple rejection by connecting an external capacitor to noise bypass terminal.

It's suitable for portable items such as cellular phones, video camera and others.

### ■ PACKAGE OUTLINE



NJM2370U




NJM2370R

### ■ FEATURES


- Output Current (150mA min. ( $V_o=0.3V$ ))
- Low Dropout Voltage (0.1V typ. ( $I_o=30mA$ )))
- External Capacitor for Noise Bypass
- ON/OFF Control Function
- Over Current Limit
- Thermal Shutdown
- Bipolar Technology
- Package Outline SOT-89(5pin), VSP8

### ■ PIN CONFIGURATION



NJM2370U


PIN FUNCTION	
1.	CONTROL
2.	GND
3.	NOISE BYPASS
4.	$V_{OUT}$
5.	$V_{IN}$

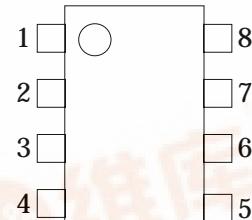

NJM2370R

PIN FUNCTION	
1.	CONTROL
2.	GND
3.	NC
4.	NOISE BYPASS
5.	$V_{OUT}$
6.	NC
7.	NC
8.	$V_{IN}$

### ■ EQUIVALENT CIRCUIT

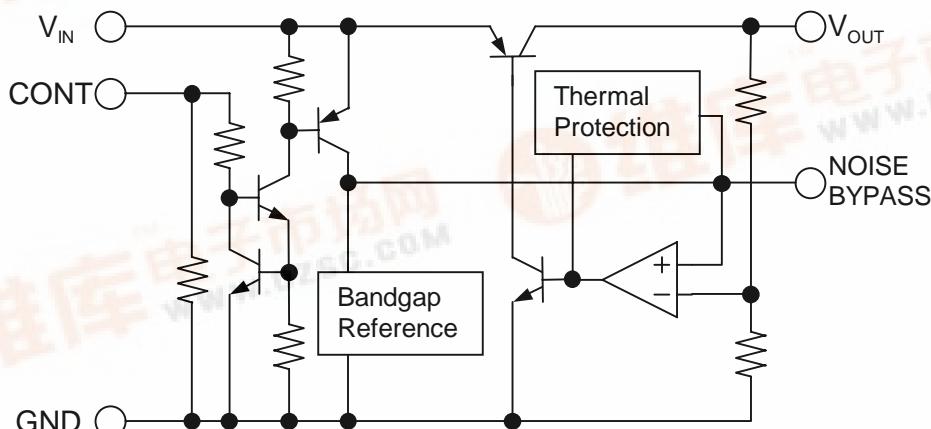

## ■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V <sub>IN</sub>	20	V
Control Voltage	V <sub>CONT</sub>	20(note 1)	V
Power Dissipation	P <sub>D</sub>	(SOT-89) 350 (VSP8) 320	mW
Operating Temperature Range	To <sub>pr</sub>	-40 ~ +85	°C
Storage Temperature Range	T <sub>stg</sub>	-40 ~ +125	°C

(note 1)When input voltage is less than +20V, the absolute maximum control voltage is equal to the input voltage.


## ■ ELECTRICAL CHARACTERISTICS

(Ta=25°C)

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	V <sub>O</sub>	V <sub>IN</sub> =V <sub>O</sub> +1V, I <sub>O</sub> =30mA	-3%	—	+3%	V
Quiescent Current 1	I <sub>Q1</sub>	I <sub>O</sub> =0mA, expect I <sub>CONT</sub>	—	180	—	μA
Quiescent Current 2	I <sub>Q2</sub>	CONTROL-GND short	—	—	100	nA
Output Current	I <sub>O</sub>	(V <sub>O</sub> -0.3V)	150	180	—	mA
Line Regulation	ΔV <sub>O</sub> /ΔV <sub>IN</sub>	V <sub>IN</sub> =(V <sub>O</sub> +1V) ~ (V <sub>O</sub> +6V) V <sub>O</sub> =2V to 14V	—	—	0.12	%/V
		V <sub>IN</sub> =(V <sub>O</sub> +1V) ~ (V <sub>O</sub> +5V) V <sub>O</sub> =15V	—	—	0.12	%/V
Load Regulation	ΔV <sub>O</sub> /ΔI <sub>O</sub>	I <sub>O</sub> =0 ~ 60mA	—	—	0.03	%/mA
Dropout Voltage	ΔV <sub>I-O</sub>	I <sub>O</sub> =30mA	—	0.1	0.3	V
Ripple Rejection	R • R	f=400Hz, ein=100mVp-p V <sub>IN</sub> =V <sub>O</sub> +1.5V, I <sub>O</sub> =10mA	—	60	—	dB
Average Temperature Coefficient of Output Voltage	ΔV <sub>O</sub> /ΔT <sub>a</sub>	T <sub>a</sub> =-20 ~ 75°C, I <sub>O</sub> =10mA V <sub>IN</sub> =V <sub>O</sub> +1.5V	—	0.2	—	mV/°C
Output Noise Voltage	V <sub>NO</sub>	10Hz < f < 80kHz, I <sub>O</sub> =10mA, V <sub>O</sub> =3V	—	30	—	μVrms


(note 2)Please confirm the specification separately because some parameters depend on output voltage.

## ■ TEST CIRCUIT

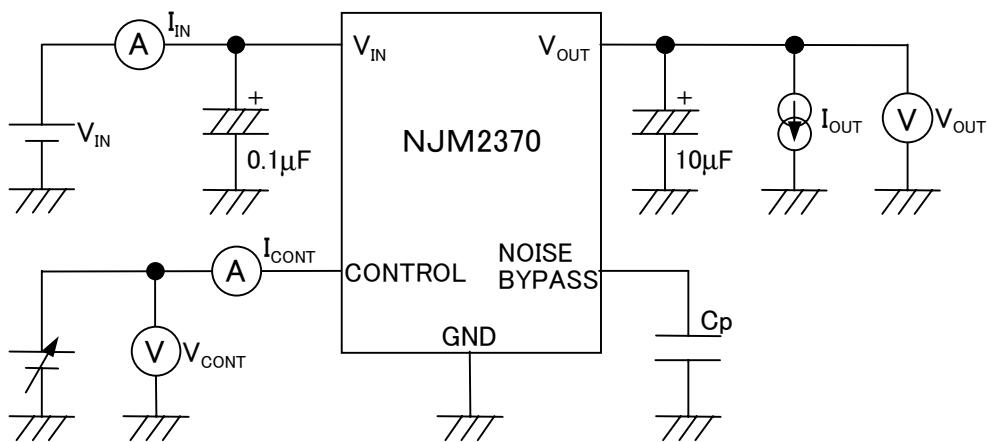

■ TYPICAL APPLICATION


- ① In Nonuse of ON/OFF Control

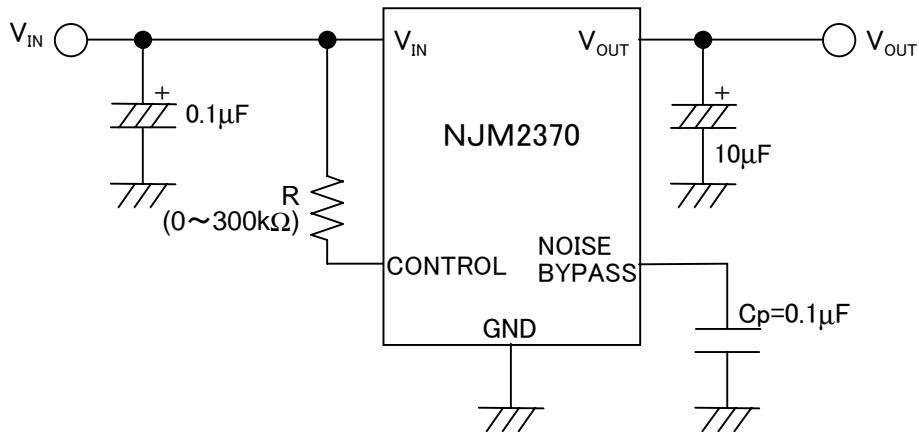

Connect control terminal(1Pin) to  $V_{IN}$  terminal(5Pin)

When a resistance "R" is connected, the quiescent current decreases, but minimum operating voltage increases. Please refer to a figure of Output Voltage vs. Control Voltage.

- ② In Use of ON/OFF CONTROL

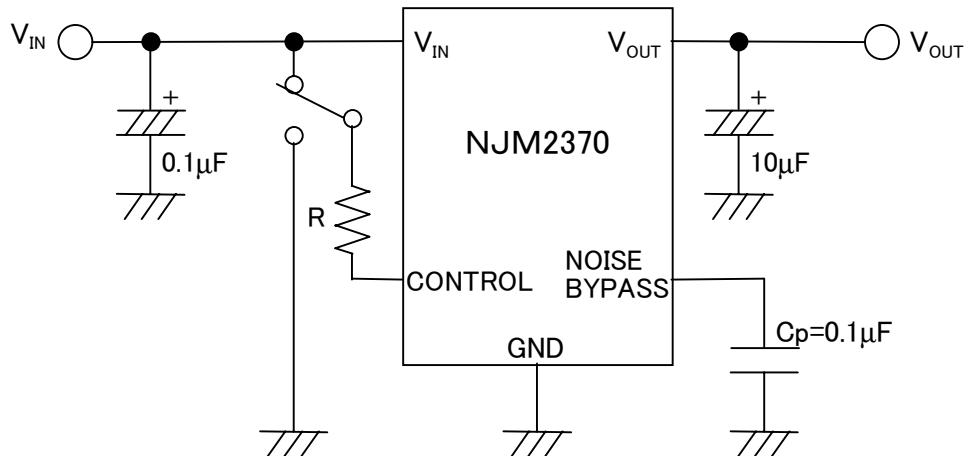

When the control terminal is "H", it is ON.

When the control terminal is "L" or "open", it is OFF.

★Noise bypass Capacitance  $C_p$



Noise bypass capacitance  $CP$  reduces noise generated by band-gap reference circuit.

Noise level and ripple rejection will be improved when larger  $CP$  is used. Please refer to the typical characteristics to determine the value.

Use of smaller  $CP$  value may induce oscillation.

Please make sure to use  $CP$  value of greater than  $0.1\mu F$  to avoid the problem.

### ■ PACKAGE MARKING

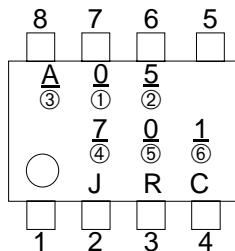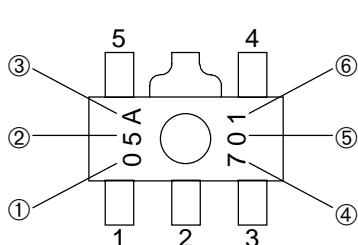

- ①, ② Output voltage rank  
(Please refer to output voltage rank list)
- ③ Plant code.(NJM2370 is "A")
- ④ Last digit of the calendar year
- ⑤, ⑥ Lot Number

### ■ OUTPUT VOLTAGE RANK LIST

Output Voltage	Part Number	Marking	
		①	②
2.0V	NJM2370X02	0	2
2.1V	NJM2370X21	2	1
2.2V	NJM2370X22	2	2
2.3V	NJM2370X23	2	3
2.4V	NJM2370X24	2	4
2.5V	NJM2370X25	2	5
2.6V	NJM2370X26	2	6
2.7V	NJM2370X27	2	7
2.8V	NJM2370X28	2	8
2.9V	NJM2370X29	2	9
3.0V	NJM2370X03	0	3
3.1V	NJM2370X31	3	1
3.2V	NJM2370X32	3	2
3.3V	NJM2370X33	3	3
3.5V	NJM2370X35	3	5


(★1):SOT-89(5pin) ONLY

(★2):VSP8 ONLY

Output Voltage	Part Number	Marking	
		①	②
3.6V	NJM2370X36	3	6
3.7V	NJM2370X37	3	7
3.8V	NJM2370X38	3	8
3.9V	NJM2370X39	3	9
4.0V	NJM2370X04	0	4
4.7V	NJM2370X47	4	7
5.0V	NJM2370X05	0	5
6.0V	NJM2370X06	0	6
8.0V	NJM2370X08	0	8
9.0V	NJM2370X09	0	9
10.0V	NJM2370X10	1	0
12.0V	NJM2370X12	1	2
13.0V	NJM2370X13	1	3
15.0V	NJM2370X15	1	5





(★1)  
(★1)  
(★1)  
(★1)  
  
(★2)

### ■ POWER DISSIPATION VS. AMBIENT TEMPERATURE

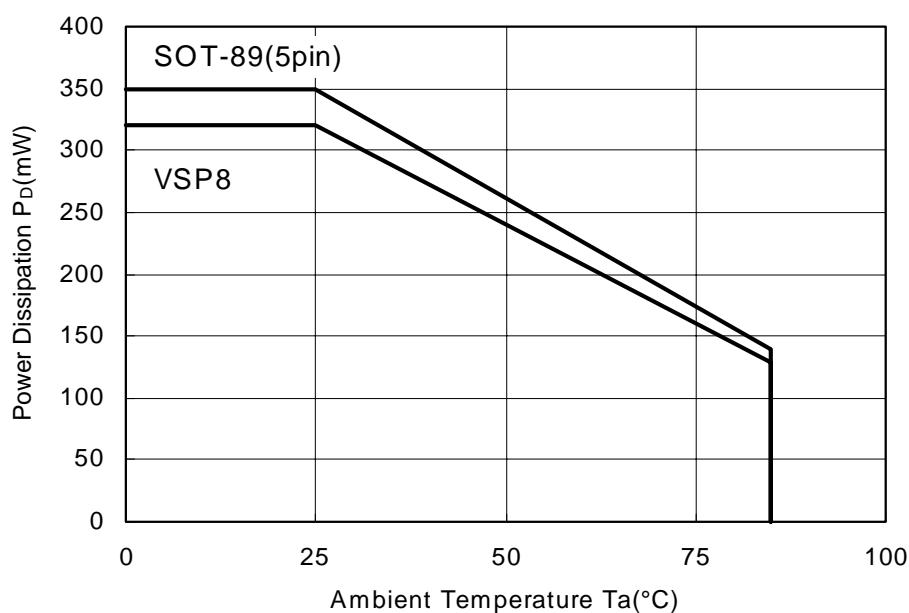





# NJM2370

## ■ TYPICAL CHARACTERISTICS

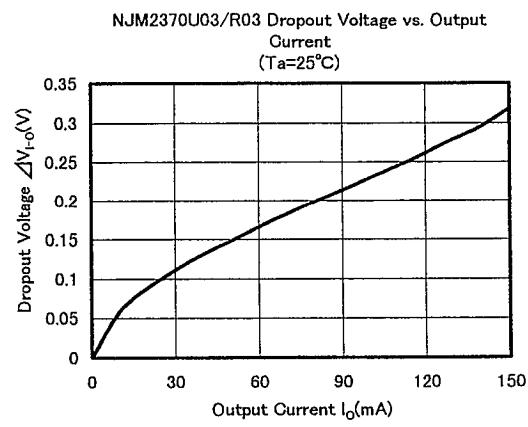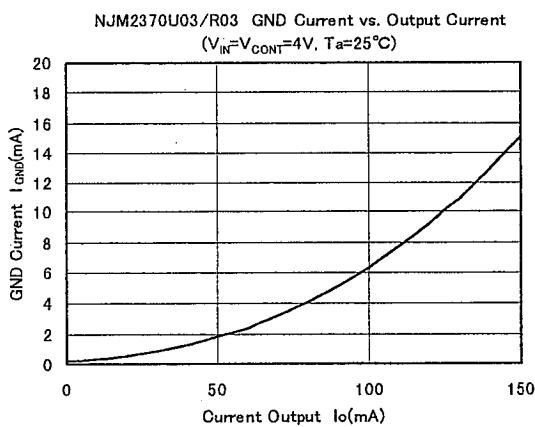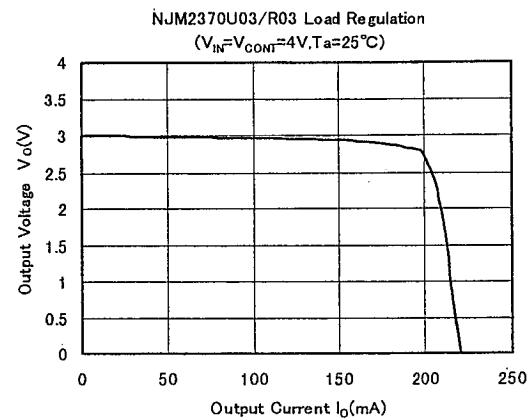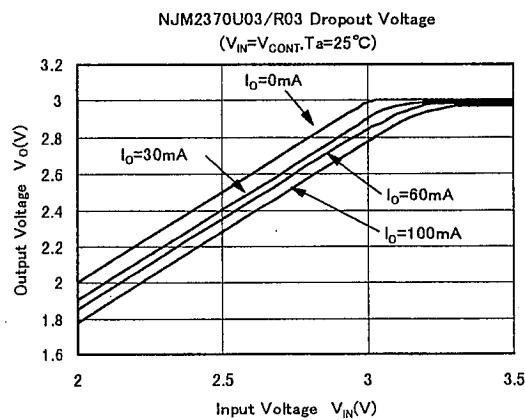






# NJM2370

## ■ TYPICAL CHARACTERISTICS

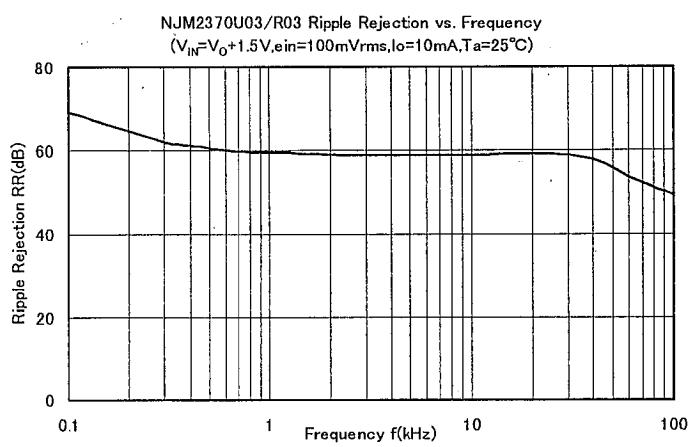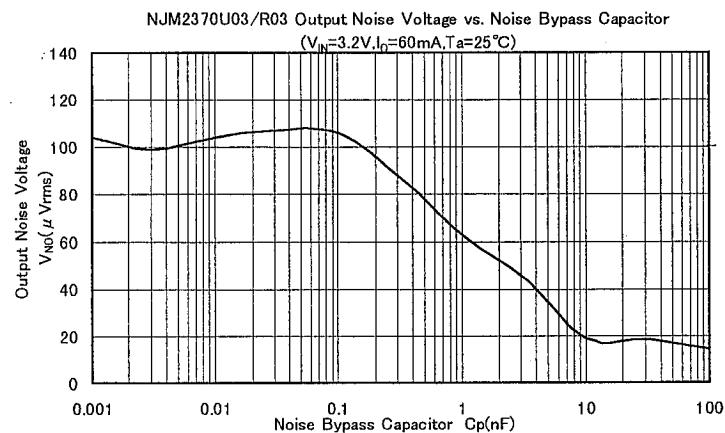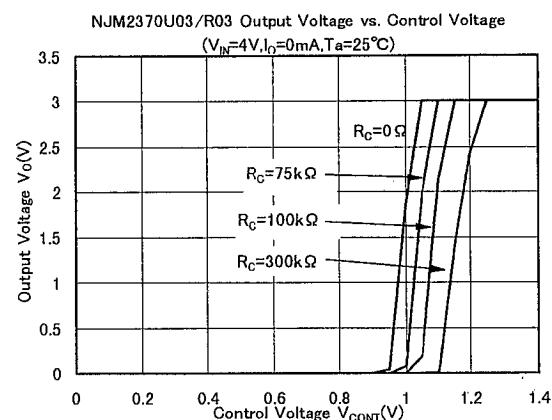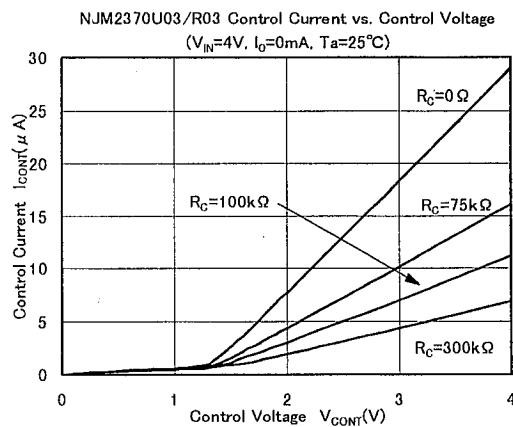

# NJM2370

## ■ TYPICAL CHARACTERISTICS

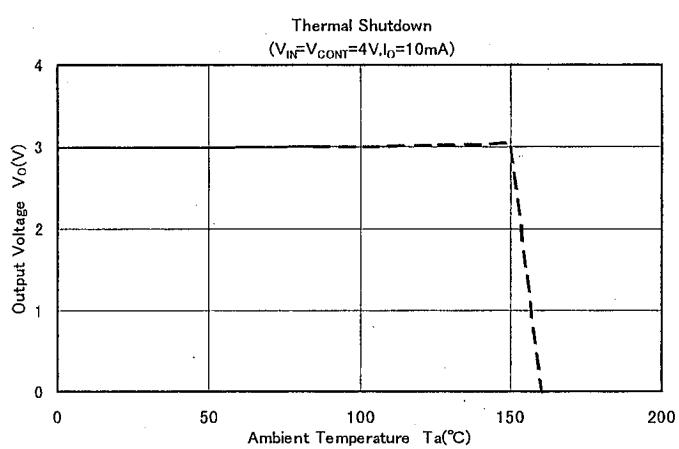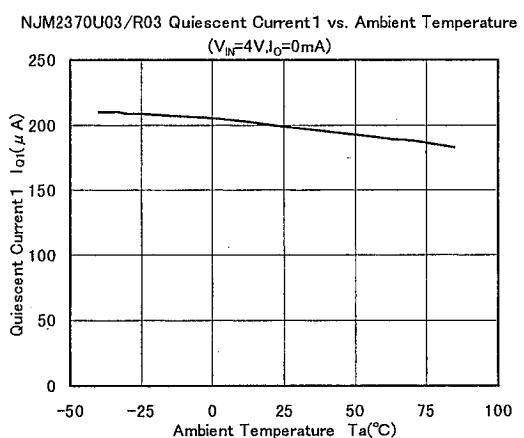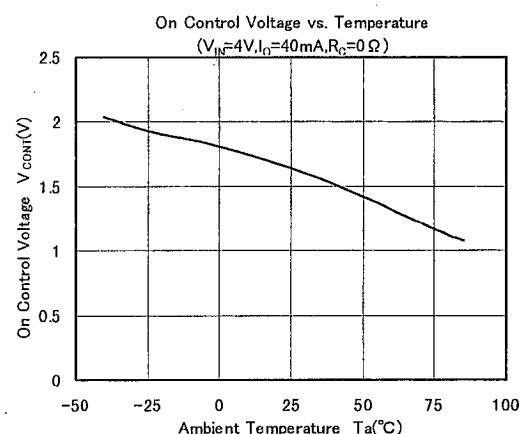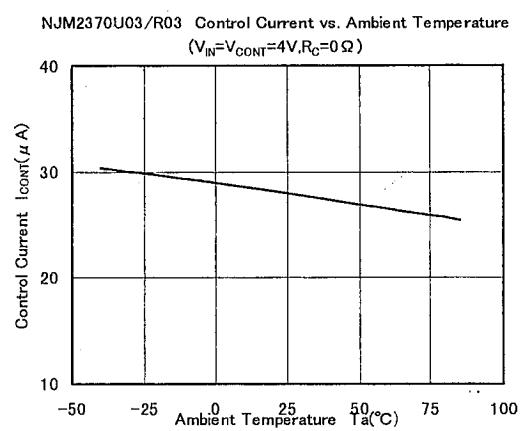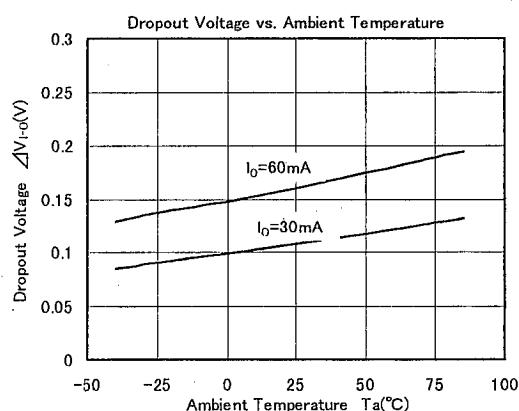

---

# MEMO

[CAUTION]  
The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.