

M51162P


RECORDING/PLAYBACK PREAMPLIFIER FOR STEREO CASSETTE TAPE RECORDER

DESCRIPTION

The M51162P is a recording and playback preamplifier for stereo cassette tape recorders. The IC built-in recording/playback mode selector switches and 2 channels of preamplifiers with an ALC circuit. This configuration realizes compact designs and a system with good channel balance.

FEATURES

- Built-in microphone and equalizer amplifiers with electronic switches.
- Built-in line amplifiers with ALC.
- Low noise $1 \mu\text{Vrms}$ ($R_9 = 1\text{k}\Omega$)
- Low distortion ratio 0.2% ($V_o = 1\text{Vrms}$)




Outline 20P4

2.54mm pitch 300mil DIP
(6.3mm x 24.0mm x 3.3mm)

RECOMMENDED OPERATING CONDITIONS

- Supply voltage range $V_{cc} = 3.5 \sim 12\text{V}$
- Rated supply voltage $V_{cc} = 9\text{V}$


SYSTEM CONFIGURATION

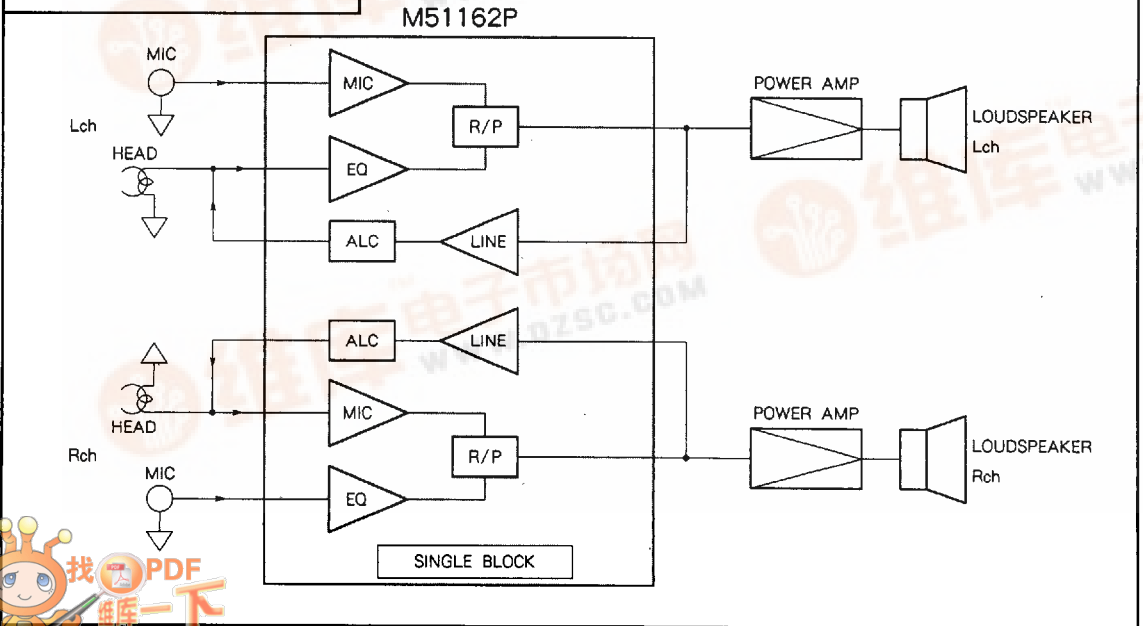


M51162P

RECORDING/PLAYBACK PREAMPLIFIER FOR STEREO CASSETTE TAPE RECORDER

PIN CONFIGURATION

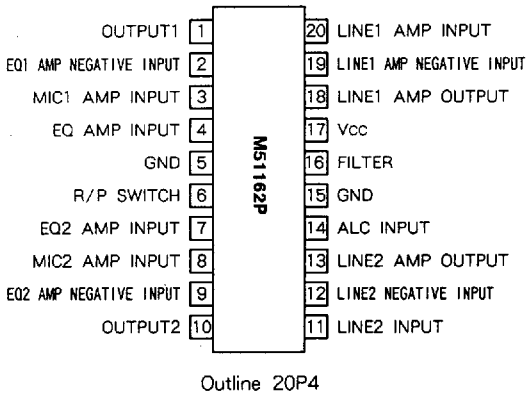

IC INTERNAL BLOCK DIAGRAM

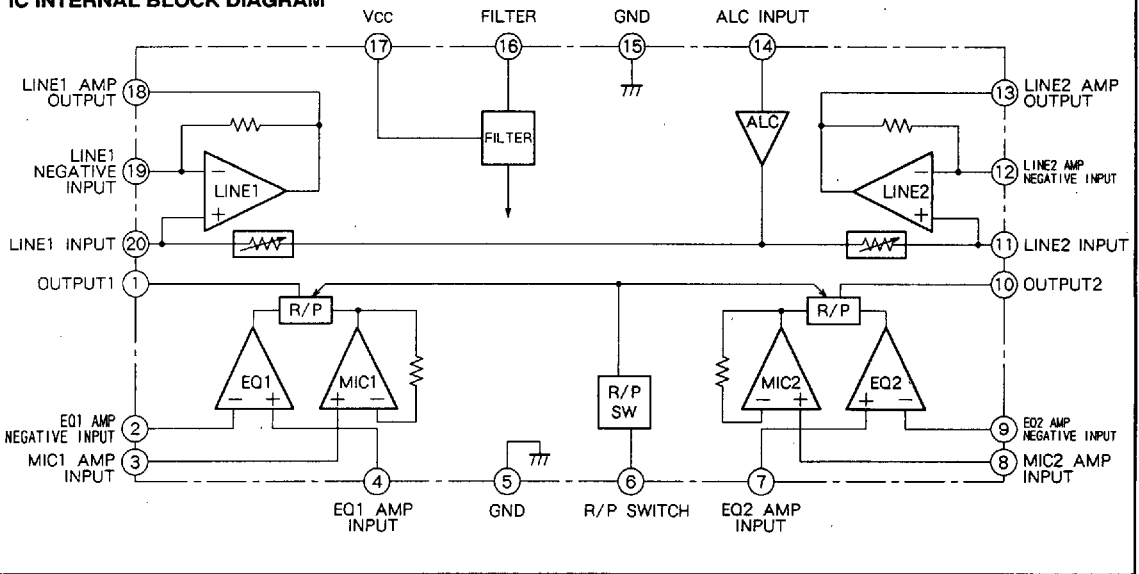

M51162P

RECORDING/PLAYBACK PREAMPLIFIER FOR STEREO CASSETTE TAPE RECORDER

ABSOLUTE MAXIMUM RATINGS (Ta = 25°C, unless otherwise noted)

| Symbol | Parameter | Ratings | Unit |
|--------|------------------------------|----------|-------|
| Vcc | Supply voltage | 18 | V |
| Icc | Circuit current | 100 | mA |
| Pd | Power dissipation | 1000 | mW |
| Kθ | Thermal derating (Ta ≥ 25°C) | 10 | mW/°C |
| Topr | Operating temperature | -20~+75 | °C |
| Tstg | Storage temperature | -40~+125 | °C |







ELECTRICAL CHARACTERISTICS (Ta = 25°C, Vcc = 9V, f = 1kHz, unless otherwise noted)

| Symbol | Parameter | Test conditions | Limits | | | Unit | |
|--------|-------------------------------|--------------------------------|---------------------------------|------|-----|------|-------|
| | | | Min | Typ | Max | | |
| Icco | Quiescent circuit current | Playback mode | 5 | 10 | 15 | mA | |
| GVM1 | MIC amplifier CH-1 | Voltage gain | 23 | 24.5 | 26 | dB | |
| VOM1 | | Maximum output voltage | 1.5 | 2.5 | - | Vrms | |
| THDM1 | | Total harmonic distortion | - | 0.2 | 0.5 | % | |
| ZIM1 | | Input impedance | M1 voltage when input = 10mVrms | 5 | 7.5 | 10 | kΩ |
| NIM1 | | Equivalent input noise voltage | Rg = 1kΩ, 30~20kHz BPF | - | 1 | 2 | μVrms |
| GVP1 | EO amplifier CH-1 | Voltage gain | 35 | 38 | 41 | dB | |
| VOP1 | | Maximum output voltage | 1.5 | 2.5 | - | Vrms | |
| THDP1 | | Total harmonic distortion | - | 0.2 | 0.5 | % | |
| ZIP1 | | Input impedance | P1 voltage when input = 10mVrms | 40 | 56 | 75 | kΩ |
| NIP1 | | Equivalent input noise voltage | Rg = 1kΩ, 30~20kHz BPF | - | 1 | 2 | μVrms |
| GVL1 | Line-recording amplifier CH-1 | Voltage gain | 37 | 40 | 43 | dB | |
| VOL1 | | Maximum output voltage | 1.9 | 2.5 | - | Vrms | |
| THDL1 | | Total harmonic distortion | - | 0.2 | 0.5 | % | |
| ZIL1 | | Input impedance | L1 voltage when input = 10mVrms | 20 | 33 | 45 | kΩ |
| NIL1 | | Equivalent input noise voltage | Rg = 1kΩ, 30~20kHz BPF | - | 1 | 3 | μVrms |
| ALCA | ALC circuit | ALC range | 40 | 46 | - | dB | |
| ALCTHD | | ALC distortion | - | - | 1.5 | % | |
| ALCB | | ALC balance | - | - | 3 | dB | |

Note. Electrical characteristics for channel 2 are the same as channel 1.







RECORDING/PLAYBACK PREAMPLIFIER FOR STEREO CASSETTE TAPE RECORDER

TYPICAL CHARACTERISTICS

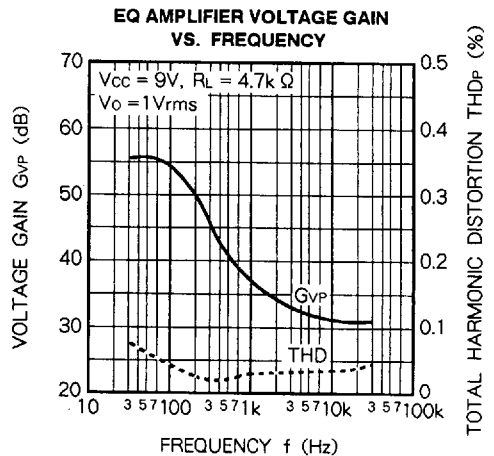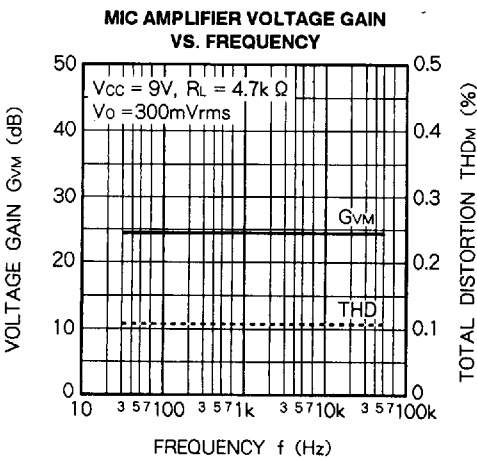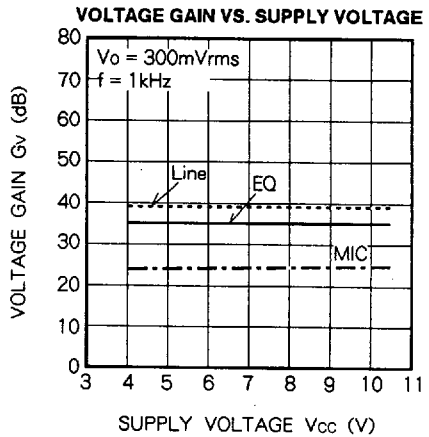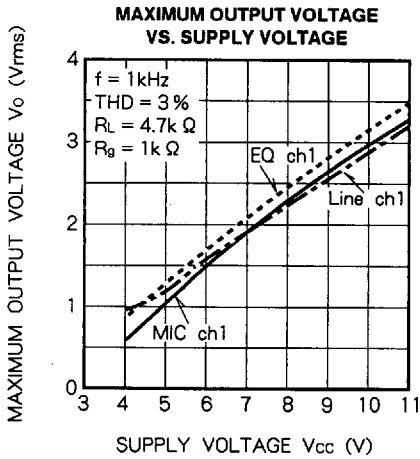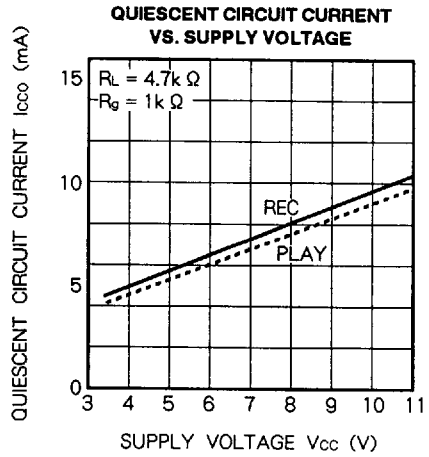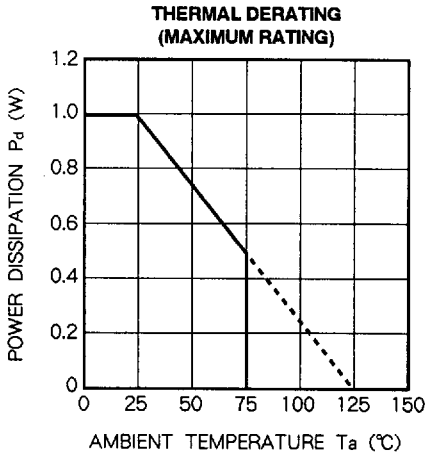



M51162P

RECORDING/PLAYBACK PREAMPLIFIER FOR STEREO CASSETTE TAPE RECORDER

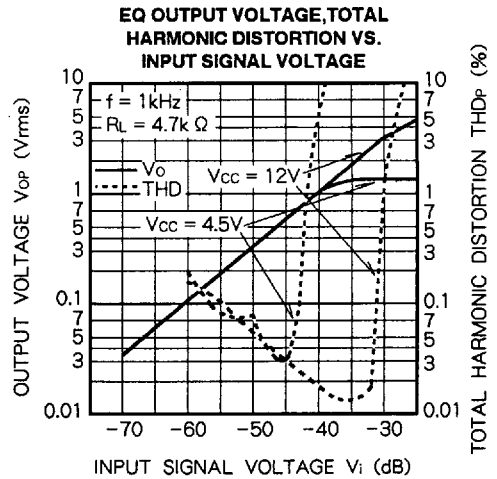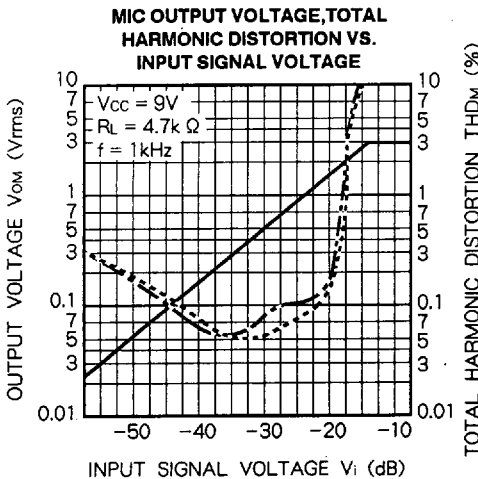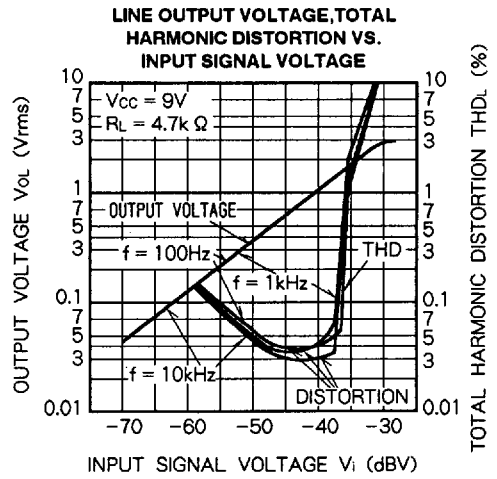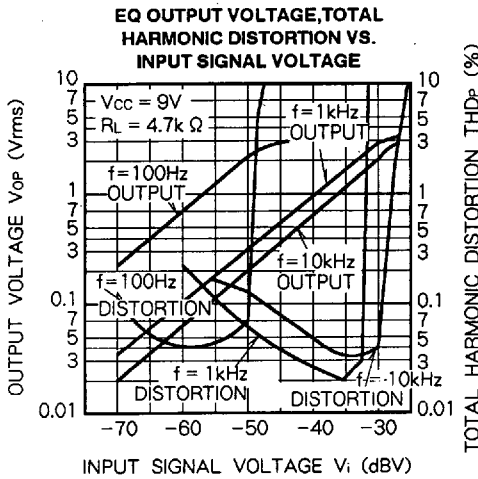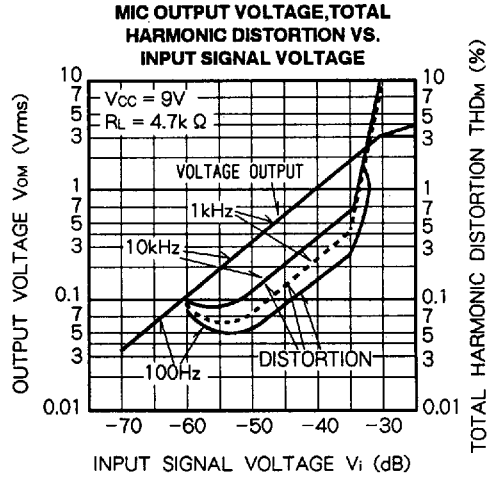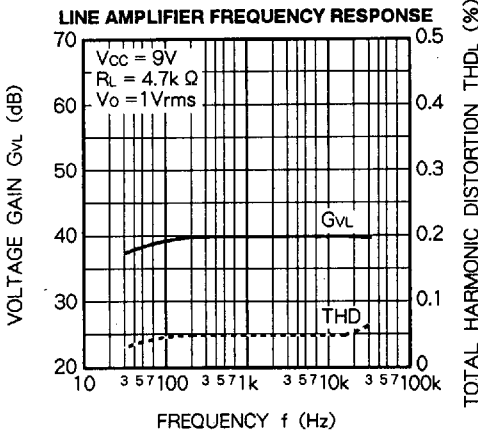

M51162P

RECORDING/PLAYBACK PREAMPLIFIER FOR STEREO CASSETTE TAPE RECORDER

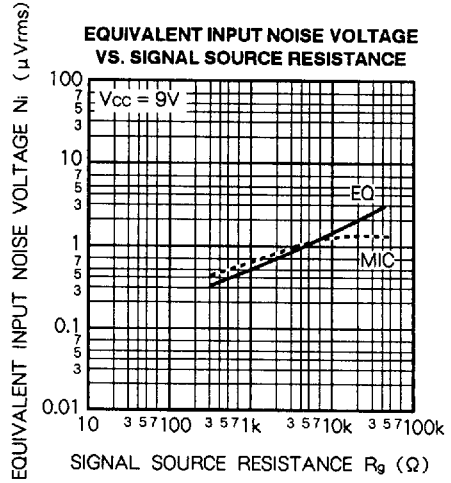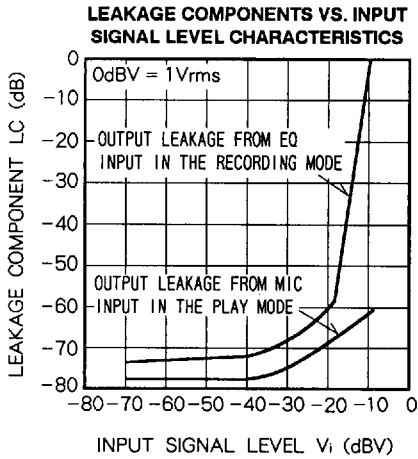

FUNCTION AND TERMINAL DESCRIPTION

1. EQ amplifier

Normally connected to the input from the magnetic head, this amplifier functions to set equalization for proper playback of the tape being used.

- EQ amp input pins, pin ④ and pin ⑦. Input impedance, 56k Ω typ.

Negative feedback pins, pin ② and pin ⑨.

Output pins, pin ① and pin ⑩. (EQ/MIC output is switched by electronic switch.)

2. MIC amplifier

Functions to amplify the input signal from the microphone connection. The circuitry of this amplifier is the same as the EQ amp, and gain is fixed at 24dB.

- MIC amp input pins, pin ③ and pin ⑧. Input impedance 7.5k Ω typ.

Output pins, pin ① and pin ⑩.

3. Line amplifier

Functions to further amplify the signal received from the EQ, MIC and other amplifiers. Can also be used as the recording amplifier.

- Line amp input pins, pin ⑪ and pin ⑭. Input impedance 33k Ω typ.

Negative feedback pins, pin ⑫ and pin ⑮

Output pins, pin ⑬ and pin ⑯

4. ALC circuit

Functions to automatically control the level of the input signal by using a built-in variable resistor.

- ALC circuit input pin, pin ⑬

Variable resistor pins, pin ⑪ and pin ⑭

In the playback mode, ALC operations are automatically disabled.

5. R/P switch

Switching between the recording and playback mode is accomplished through a DC voltage signal.

- R/P switch control pin, pin ⑥

Recording mode: Control voltage, more than 2.2V, more than 100 μ A current.

Playback mode: Grounded

6. Filter

pin ⑰

7. Power supply

pin ⑰

8. Ground

pin ⑤ and ⑱