


# The RF Line 128-Channel (860 MHz) CATV Line Extender Amplifier

**MHW8242A**

- Specified for 128-Channel Performance
- Broadband Power Gain — @ f = 40–860 MHz  
 $G_p = 24$  dB (Typ)
- Broadband Noise Figure  
 $NF = 7.5$  dB (Max) @ 860 MHz
- Superior Gain, Return Loss and DC Current Stability with Temperature
- All Gold Metallization
- 7 GHz  $f_T$  Ion-Implanted Transistors
- Improved CTB Performance

**24 dB GAIN  
 860 MHz  
 128-CHANNEL  
 CATV AMPLIFIER**

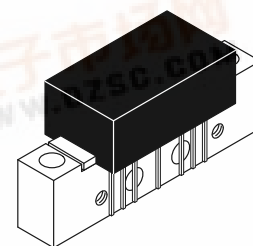

**CASE 714Y-03, STYLE 1**


## MAXIMUM RATINGS

Rating	Symbol	Value	Unit
RF Voltage Input (Single Tone)	$V_{in}$	+55	dBmV
DC Supply Voltage	$V_{CC}$	+28	Vdc
Operating Case Temperature Range	$T_C$	-20 to +100	°C
Storage Temperature Range	$T_{stg}$	-40 to +100	°C

## ELECTRICAL CHARACTERISTICS ( $V_{CC} = 24$ Vdc, $T_C = +30$ °C, 75 $\Omega$ system unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit	
Frequency Range	BW	40	—	860	MHz	
Power Gain	$G_p$	50 MHz	23.2	24	dB	
		860 MHz	24	25		
Slope	S	0	0.8	1.8	dB	
Gain Flatness (40–860 MHz, Peak To Valley)	—	—	0.4	0.8	dB	
Return Loss — Input/Output ( $Z_0 = 75$ Ohms)	IRL/ORL	@ 40 MHz	20	—	dB	
		@ f > 40 MHz (Derate)	—	—		0.007
Composite Second Order	$CSO_{128}$ $CSO_{77}$	128-Channel FLAT ( $V_{out} = +38$ dBmV/ch., Worst Case)	—	-69	-62	dBc
		77-Channel FLAT ( $V_{out} = +44$ dBmV/ch., Worst Case)	—	-78	—	
Cross Modulation Distortion @ Ch 2	$XMD_{128}$ $XMD_{77}$	128-Channel FLAT ( $V_{out} = +38$ dBmV/ch., FM = 55 MHz)	—	-65	-62	dBc
		77-Channel FLAT ( $V_{out} = +44$ dBmV/ch., FM = 55 MHz)	—	-58	—	
Composite Triple Beat	$CTB_{128}$ $CTB_{77}$	128-Channel FLAT ( $V_{out} = +38$ dBmV/ch., Worst Case)	—	-68	-64	dBc
		77-Channel FLAT ( $V_{out} = +44$ dBmV/ch., Worst Case)	—	-64	—	
Noise Figure	NF	50 MHz	—	4.8	5.5	dB
		860 MHz	—	5.8	7.5	
DC Current	$I_{DC}$	280	318	350	mA	

## PACKAGE DIMENSIONS

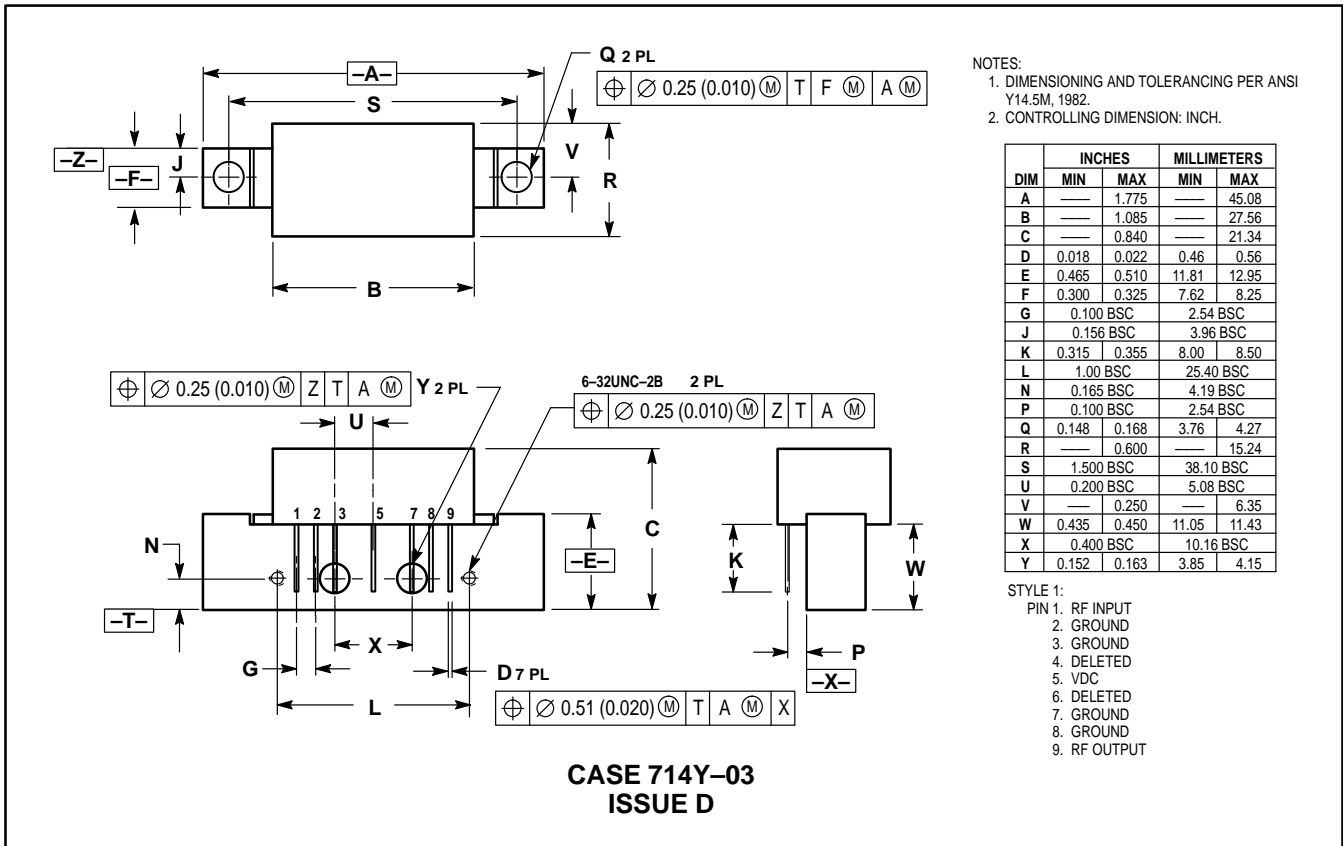

- NOTES:  
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.  
 2. CONTROLLING DIMENSION: INCH.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	—	1.775	—	45.08
B	—	1.085	—	27.56
C	—	0.840	—	21.34
D	0.018	0.022	0.46	0.56
E	0.465	0.510	11.81	12.95
F	0.300	0.325	7.62	8.25
G	0.100 BSC	—	2.54 BSC	—
J	0.156 BSC	—	3.96 BSC	—
K	0.315	0.355	8.00	8.50
L	1.00 BSC	—	25.40 BSC	—
N	0.165 BSC	—	4.19 BSC	—
P	0.100 BSC	—	2.54 BSC	—
Q	0.148	0.168	3.76	4.27
R	—	0.600	—	15.24
S	1.500 BSC	—	38.10 BSC	—
U	0.200 BSC	—	5.08 BSC	—
V	—	0.250	—	6.35
W	0.435	0.450	11.05	11.43
X	0.400 BSC	—	10.16 BSC	—
Y	0.152	0.163	3.85	4.15

- STYLE 1:  
 PIN 1. RF INPUT  
 2. GROUND  
 3. GROUND  
 4. DELETED  
 5. VDC  
 6. DELETED  
 7. GROUND  
 8. GROUND  
 9. RF OUTPUT

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Mfax is a trademark of Motorola, Inc.

**How to reach us:**

**USA/EUROPE/Locations Not Listed:** Motorola Literature Distribution;  
 P.O. Box 5405, Denver, Colorado 80217. 1-303-675-2140 or 1-800-441-2447

**JAPAN:** Nippon Motorola Ltd.: SPD, Strategic Planning Office, 4-32-1,  
 Nishi-Gotanda, Shinagawa-ku, Tokyo 141, Japan. 81-3-5487-8488

**Customer Focus Center: 1-800-521-6274**

**Mfax™:** RMFAX0@email.sps.mot.com – TOUCHTONE 1-602-244-6609  
 Motorola Fax Back System – US & Canada ONLY 1-800-774-1848  
 – <http://sps.motorola.com/mfax/>

**ASIA/PACIFIC:** Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,  
 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

**HOME PAGE:** <http://motorola.com/sps/>