

1259**Industrial Safety Flashlight**

(UL/MSHA/CSA approved)

**WARNING:**

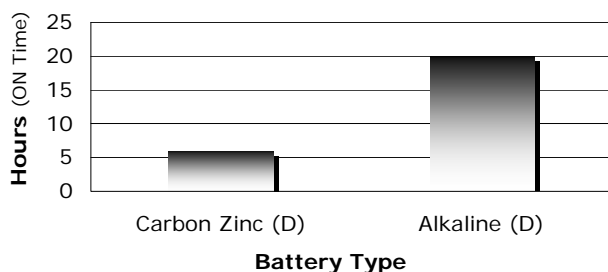
USE ONLY PR-2 AND 2 SIZE "D"
1.5 VOLT CARBON ZINC OR ALKALINE BATTERIES.
RISK OF EXPLOSION - DO NOT OPEN IN HAZARDOUS
AREA. TO PREVENT THE IGNITION OF A HAZARDOUS
ATMOSPHERE, BATTERIES MUST ONLY BE CHANGED IN
AN AREA KNOWN TO BE NON-HAZARDOUS.

Features

Impact Resistant Industrial Flashlight
Shatterproof Lens
Non-Roll Barrel Design
Hanger Ring Attached
Integrated Spare Bulb Holder
Industrial Safety Orange Color

Typical Battery Service

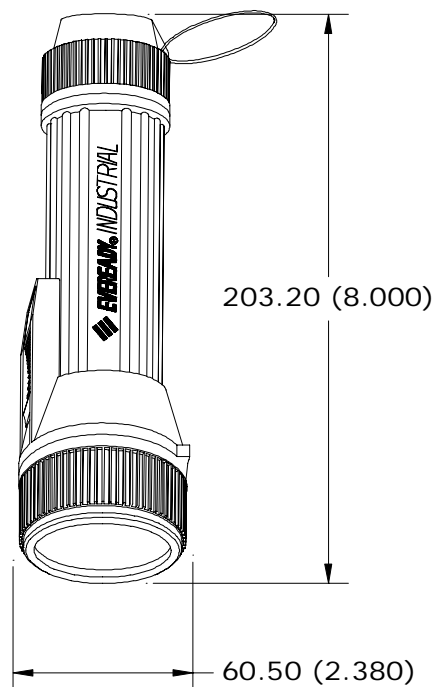
500 mA Continuous
at 21°C (70°F)

**Specifications**

Designation: Industrial Flashlight
(UL/MSHA/CSA approved)
Power Source: Two D Size Batteries
(ANSI/NEDA 13 Series)
Lamp: No. PR-2
(Rated at 2.4V, 0.5A)
Lamp Output: Rated at 11.4 Lumens
Typical Weight: 113 grams (4.0 oz.)
(without batteries)

Physical Dimensions

mm (inches)

**Typical Battery Service to 0.9V (per battery) at 21°C (70°F)**

<u>Schedule</u>	<u>Battery Type</u>	<u>Hours (ON Time)</u>
500 mA Continuous	1250	6.0
500 mA Continuous	EN95	20

MSHA approved for use in methane-air mixtures and UL listed for Division I and II, Class I, Group C and D environments. For use in gas-air mixtures of Acetone, Butane, Benzene, Diethyl Ether, Ethyl and Methyl Alcohols, Gasoline, Methane (natural gas), Naptha and Propane. Approved also for use in dust-air mixtures of Class II, Group G. Designed so that if lamp is broken, electrical circuit will be opened before filament can ignite these flammable or explosive gas-air mixtures in the surrounding atmosphere.

Important Notice

This datasheet contains information specific to flashlights manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright Eveready Battery Co. Inc. - All Rights Reserved