


FEATURES

- 175° C T_J operation
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term

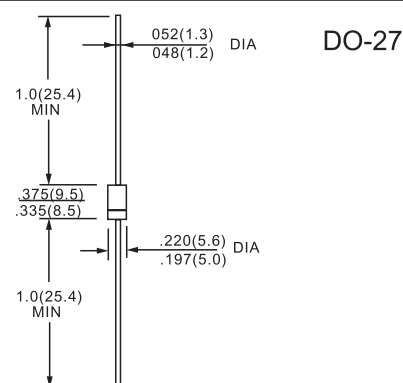

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

VOLTAGE RATINGS

PARAMETER	SYMBOL	90SQ030	90SQ035	90SQ040	90SQ045	UNITS
Maximum DC reverse voltage	V _R	30	35	40	45	V
Maximum working peak reverse voltage	V _{RWM}					

ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	TEST CONDITIONS	VALUES	UNITS
Maximum average forward current See fig. 5	I _{F(AV)}	50 % duty cycle at T _C = 69 °C, rectangular waveform	9	A
Maximum peak one cycle non-repetitive surge current See fig. 7	I _{FSM}	5 μs sine or 3 μs rect. pulse	2150	
		10 ms sine or 6 ms rect. pulse	340	
Non-repetitive avalanche energy	E _{AS}	T _J = 25 °C, I _{AS} = 1.8 A, L = 7.4 mH	12	mJ
Repetitive avalanche current	I _{AR}	Current decaying linearly to zero in 1 μs Frequency limited by, T _J maximum V _A = 1.5 x V _R typical	1.8	A

ELECTRICAL SPECIFICATIONS

PARAMETER	SYMBOL	TEST CONDITIONS	VALUES	UNITS
Maximum forward voltage drop See fig. 1	V _{FM} ⁽¹⁾	9 A	0.48	V
		18 A	0.57	
		9 A	0.42	
		18 A	0.52	
Maximum reverse leakage current See fig. 2	I _{RM} ⁽¹⁾	T _J = 25 °C	1.75	mA
		T _J = 125 °C	70	
Maximum junction capacitance	C _T	V _R = 5 V _{DC} , (test signal range 100 kHz to 1 MHz) 25 °C	900	pF
Typical series inductance	L _S	Measured lead to lead 5 mm from body	10.0	nH
Maximum voltage rate of change	dV/dt	Rated V _R	10 000	V/μs

THERMAL - MECHANICAL SPECIFICATIONS

PARAMETER	SYMBOL	TEST CONDITIONS	VALUES	UNITS
Maximum junction and storage temperature range	T _J , T _{Stg}		- 55 to 150	°C
Maximum thermal resistance, junction to lead	R _{thJL}	DC operation; see fig. 4 1/8" lead length	8.0	°C/W
Typical thermal resistance, junction to air	R _{thJA}		44	
Approximate weight			1.4	g
			0.049	oz.
Marking device		Case style DO-204AR (JEDEC)	90SQ030	
			90SQ035	
			90SQ040	
			90SQ045	



TAYCHIPST

SCHOTTKY RECTIFIER

90SQ030 THRU 90SQ045

30V-45V 9.0A

RATINGS AND CHARACTERISTIC CURVES 90SQ030 THRU 90SQ045

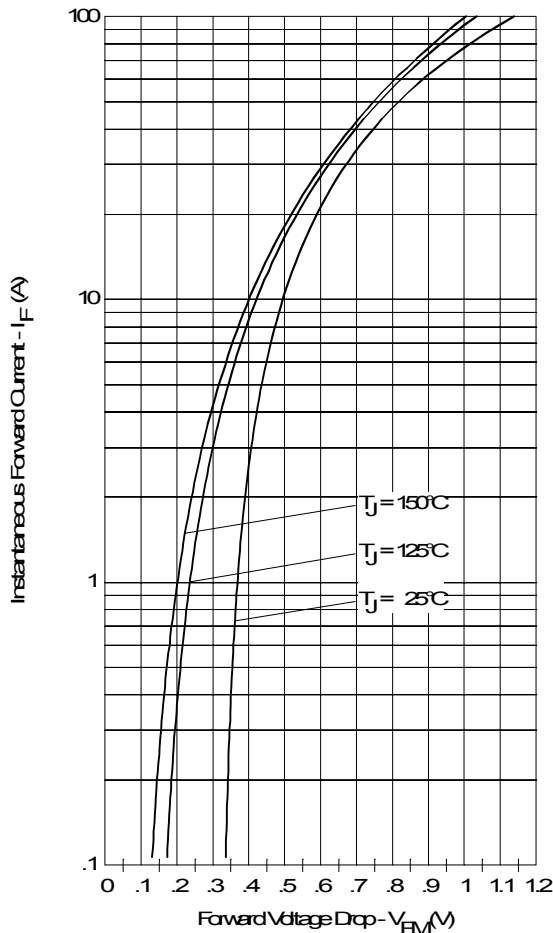


Fig. 1 - Maximum Forward Voltage Drop Characteristics

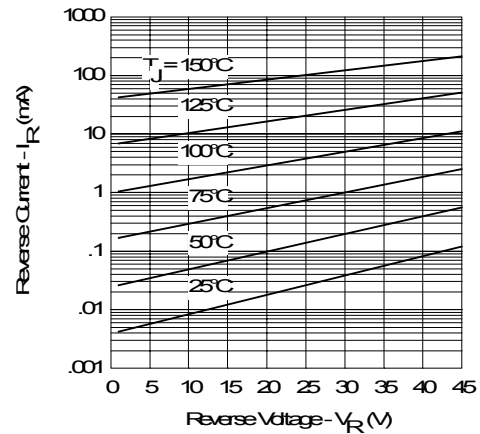


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage

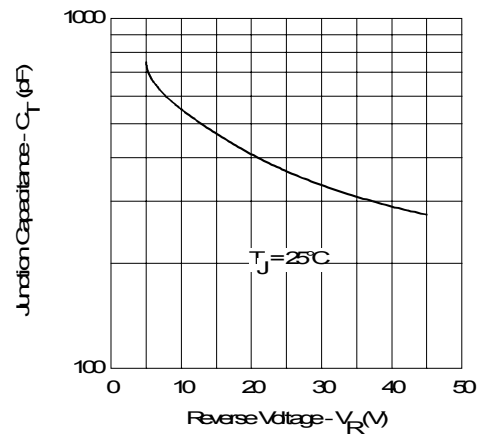


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

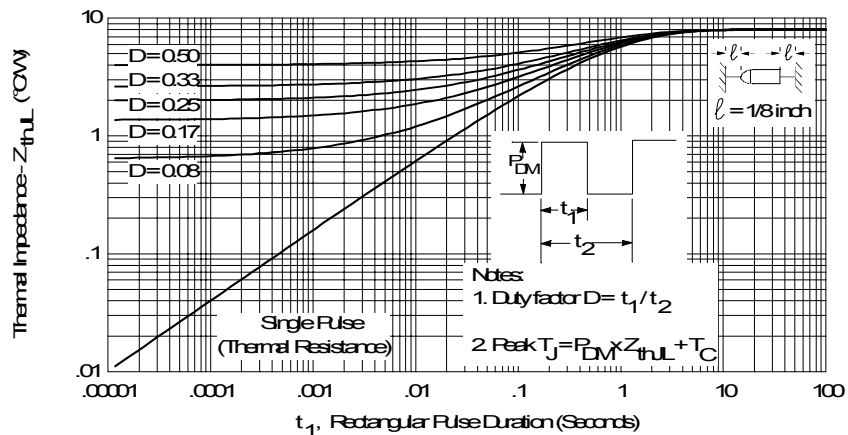


Fig. 4 - Maximum Thermal Impedance Z Characteristics



TAYCHIPST

SCHOTTKY RECTIFIER

90SQ030 THRU 90SQ045

30V-45V 9.0A

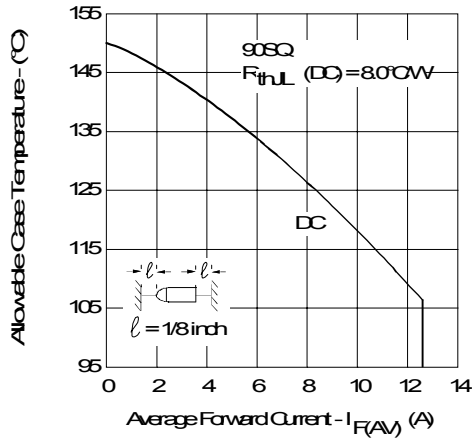


Fig. 5 - Maximum Allowable Case Temperature Vs. Average Forward Current

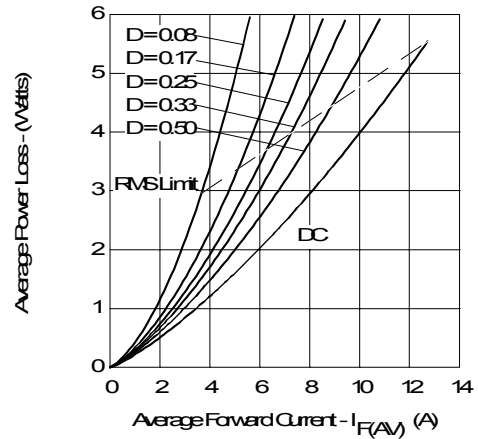


Fig. 6 - Forward Power Loss Characteristics

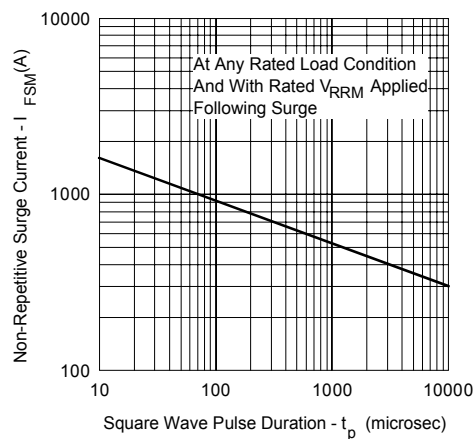


Fig. 7 - Maximum Non-Repetitive Surge Current

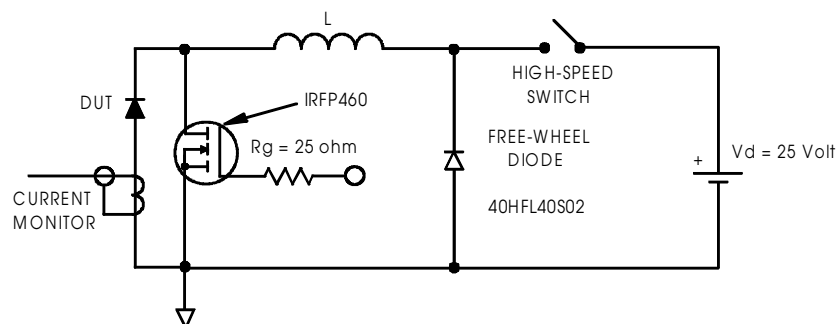


Fig. 8 - Unclamped Inductive Test Circuit