


**TAYCHIPST****MEDIUM CURRENT PLASTIC RECTIFIER****BY251 THRU BY255****200V-1300V 3.0A****FEATURES**

- Exce High surge current capability
- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- Low leakage
- Void-free molded in DO-201AD plastic package
- High current operation of 3 Amperes at $T_A=95\text{ }^{\circ}\text{C}$ with no thermal runaway
- eds environmental standards of MIL-S-19500/228

MECHANICAL DATA

- Case: JEDEC DO-201AD Molded plastic
- Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode
- Mounting Position: Any
- Weight: 0.04 ounce, 1.1 gram

DO-27

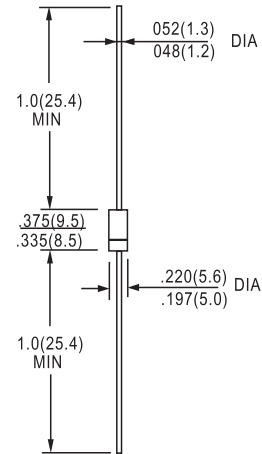

Dimensions in inches and (milli)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICSRatings at 25 $^{\circ}\text{C}$ ambient temperature unless otherwise specified.

60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

RANTINGS	SYMBOLS	BY251	BY252	BY253	BY254	BY255	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	200	400	600	800	1300	Volts
Maximum RMS Voltage	V_{RMS}	140	280	420	560	910	Volts
Maximum DC Blocking Voltage	V_{DC}	200	400	600	800	1300	Volts
Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length at $T_A=95\text{ }^{\circ}\text{C}$	$I_{(AV)}$	3.0					Amps
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	100.0					Amps
Maximum Instantaneous Forward Voltage $T_J=25\text{ }^{\circ}\text{C}$ at 3.0A	V_F	1.1 1.0					Volts Volts
Maximum DC Reverse Current $T_A=25\text{ }^{\circ}\text{C}$ at Rated DC Blocking Voltage $T_A=100\text{ }^{\circ}\text{C}$	I_R	5.0 1000					μA μA
Typical Junction capacitance (Note 2) $T_J=25\text{ }^{\circ}\text{C}$	C_J	40					pF
Typical Reverse Recovery Time (Note 3)	T_{RR}	2.5					μs
Typical Thermal Resistance (Note 1)	$R_{\theta KJA}$	15.0					$^{\circ}\text{C/W}$
Operating Junction Temperature Range	T_J	-50 to +150					$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-50 to +150					$^{\circ}\text{C}$

NOTES:

1. Thermal Resistance From Junction to applied at Ambient 0.375"(9.5mm) lead length P.C.Board mounted.
2. Measured at 1 MHz and applied reverse voltage of 4.0 volts.
3. Reverse Recovery Test Conditions: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{rr}=0.25\text{A}$.



RATINGS AND CHARACTERISTIC CURVES BY251 THRU BY255

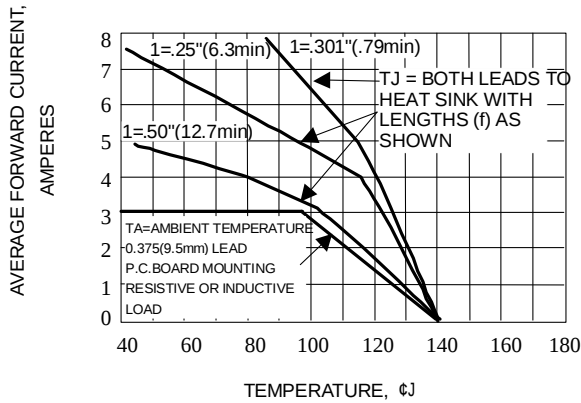


Fig. 1-FORWARD CURRENT DERATING CURVE

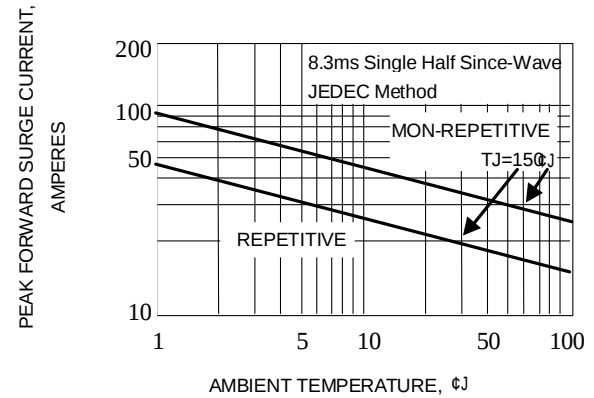


Fig. 2-MAXIMUM PEAK FORWARD SURGE CURRENT

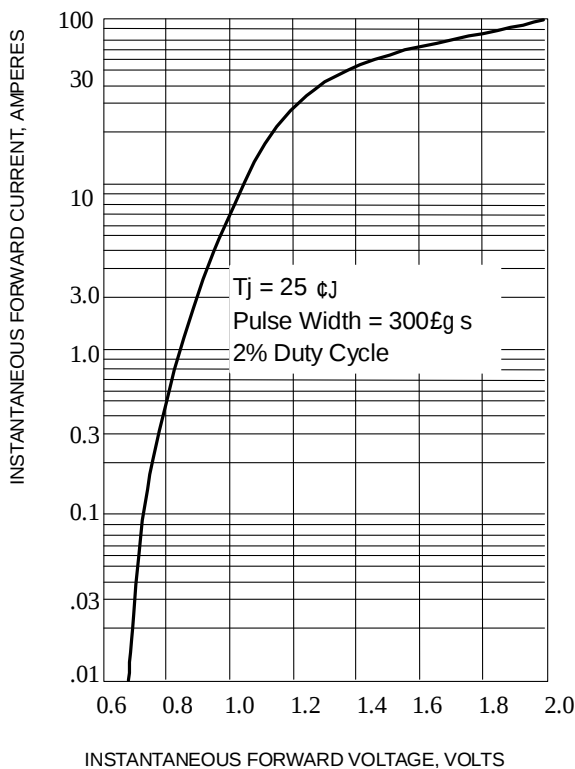


Fig. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

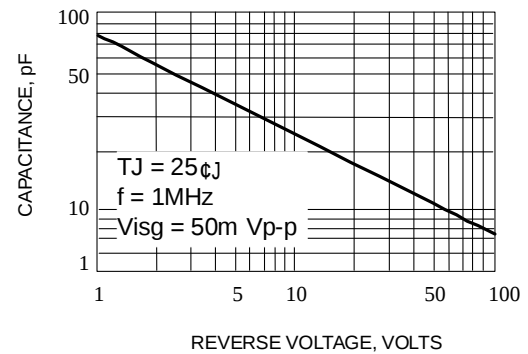


Fig. 4-TYPICAL JUNCTION CAPACITANCE

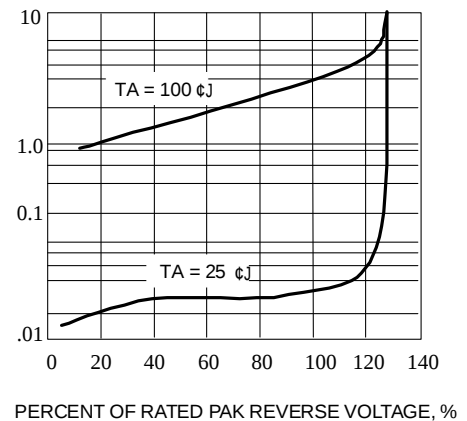


Fig. 5-TYPICAL REVERSE CHARACTERISTICS