

FEATURES

- * GPRC (Glass Passivated Rectifier Chip) inside
- * Glass passivated cavity-free junction
- * Superfast recovery time for high efficiency
- * Low forward voltage , high current capability
- * Low leakage current
- * High surge current capability
- * High temperature soldering guaranteed: 260°C/10 seconds, 0.375" (9.5mm) lead length, 5lbs. (2.3 kg) tension
- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0

MECHANICAL DATA

Case : JEDEC DO-201AD molded plastic over glass body


Terminals : Plated axial leads , solderable per MIL-STD-750, Method 2026

Polarity : Color band denotes cathode end

Mounting Position : Any

Weight : 0.015 ounces , 0.4 gram

DO-27

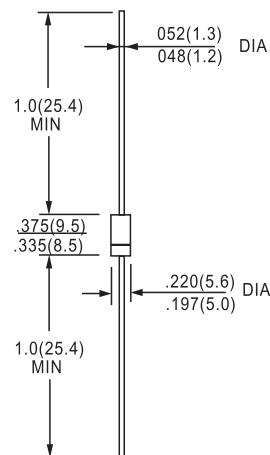

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	EGP 50A	EGP 50B	EGP 50C	EGP 50D	EGP 50F	EGP 50G	UNITS
Maximum recurrent peak reverse voltage	V _{RRM}	50	100	150	200	300	400	Volts
Maximum RMS voltage	V _{RMS}	35	70	105	140	210	280	Volts
Maximum DC blocking voltage	V _{DC}	50	100	150	200	300	400	Volts
Maximum average forward rectified current 0.375" (9.5mm) lead length at T _L =55°C	I _(AV)	5.0						Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load	I _{FSM}	150.0						Amps
Maximum instantaneous forward voltage at 5.0A	V _F	0.95				1.25		Volts
Maximum DC reverse current at rated DC blocking voltage	I _R	5.0 50.0						μA
Maximum reverse recovery time (NOTE 1)	trr	50.0						ns
Typical thermal resistance (NOTE 2)	R _{θJA} R _{θJL}	20.0 5.0						°C/W
Typical junction capacitance (NOTE 3)	C _J	95				75		pF
Operating junction and storage temperature range	T _J , T _{STG}	-65 to +150						°C

NOTES:

(1) Reverse recovery test conditions: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{rr}=0.25\text{A}$

(2) Thermal resistance from junction to ambient and from junction of lead at 0.375" (9.5mm) lead length, both leads measured attached to heat sinks

(3) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts

RATINGS AND CHARACTERISTIC CURVES EGP50A THRU EGP50G

FIG. 1 - MAXIMUM FORWARD CURRENT DERATING CURVE

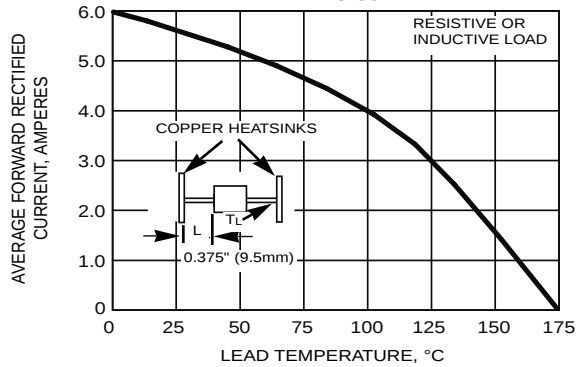


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

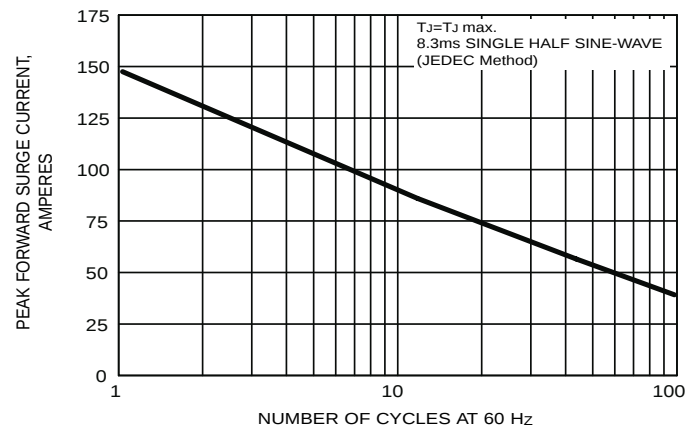


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

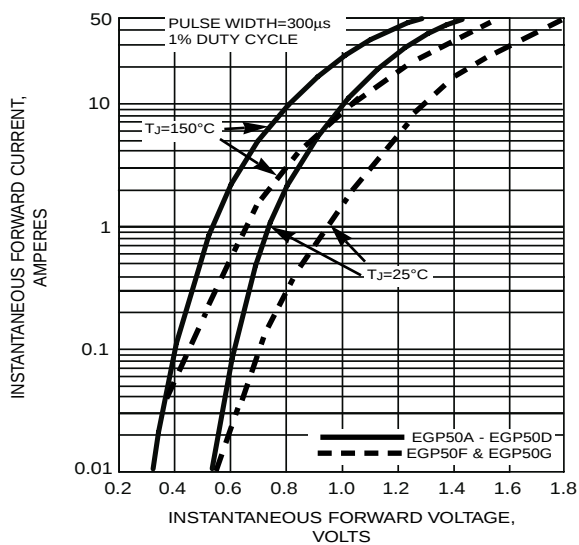


FIG. 4 - TYPICAL REVERSE LEAKAGE CHARACTERISTICS

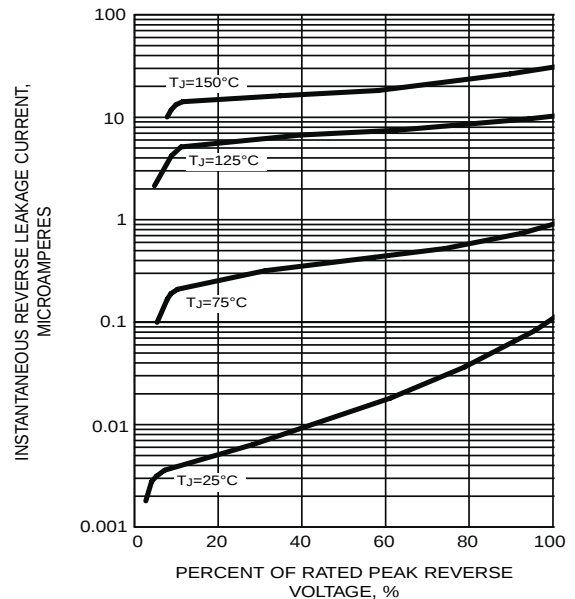


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

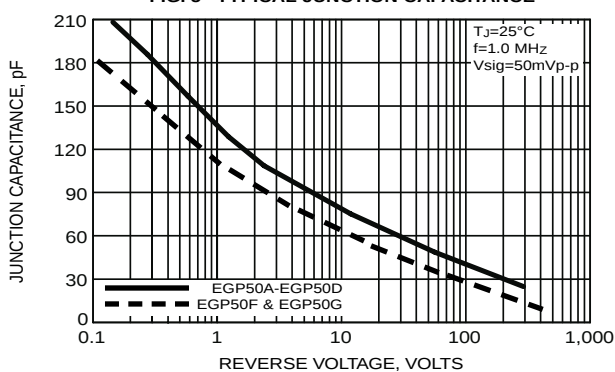


FIG. 6 - TYPICAL TRANSIENT THERMAL IMPEDANCE

