

**TAYCHIPST**


High-Current Density Surface Mount Schottky Rectifier

SSA33L THRU SSA34**30V-40V 3.0A****FEATURES**

- Low power loss, high efficiency
- Low profile surface mount package
- Built-in strain relief
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- Guardring for overvoltage protection
- Plastic package has Underwriters Laboratory Flammability Classification 94V-0

MECHANICAL DATA**Case:** JEDEC DO-214AC molded plastic body**Terminals:** Solder plated, solderable per MIL-STD750, Method 2026High temperature soldering guaranteed:
250°C/10 seconds at terminals**Polarity:** Color band denotes cathode end**Weight:** 0.002 ounce, 0.064 gram

DO-214AC(SMA)

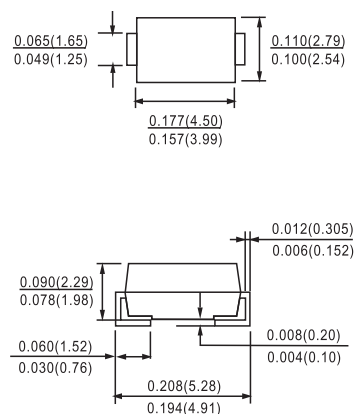

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**Maximum Ratings and Thermal Characteristics** ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	SSA33L	SSA34	Unit
Device marking code		33L	S34	V
Maximum repetitive peak reverse voltage	V_{RRM}	30	40	V
Maximum RMS voltage	V_{RMS}	21	28	V
Maximum DC blocking voltage	V_{DC}	30	40	V
Maximum average forward rectified current at T_L (See Fig. 1)	$I_{F(AV)}$	3.0		A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	75		A
Typical thermal resistance ⁽²⁾	$R_{\theta JA}$ $R_{\theta JL}$	110 28		$^\circ\text{C/W}$
Voltage rate of change (rated V_R)	dv/dt	10,000		V/ μs
Operating junction temperature range	T_J	-65 to +150		$^\circ\text{C}$
Storage temperature range	T_{STG}	-65 to +150		$^\circ\text{C}$

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Typ.	Max.	Typ.	Max.	Unit
Maximum instantaneous forward voltage at 3.0A ⁽¹⁾	V_F	0.43	0.45	0.46	0.49	V
		$T_J=25^\circ\text{C}$ 0.34	$T_J=125^\circ\text{C}$ 0.38	$T_J=25^\circ\text{C}$ 0.38	$T_J=125^\circ\text{C}$ 0.42	
Maximum DC reverse current at rated DC blocking voltage ⁽¹⁾	I_R	—	0.5	—	0.2	mA
		$T_J=25^\circ\text{C}$ 20	$T_J=125^\circ\text{C}$ 35	$T_J=25^\circ\text{C}$ 17	$T_J=125^\circ\text{C}$ 30	

Notes: (1) Pulse test: 300 μs pulse width, 1% duty cycle

(2) Aluminum substrate mounted

RATINGS AND CHARACTERISTIC CURVES

SSA33L THRU SSA34

Fig. 1 – Forward Current Derating Curve

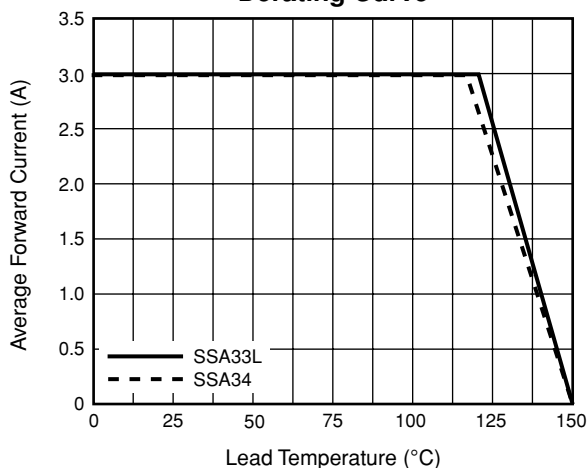


Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current

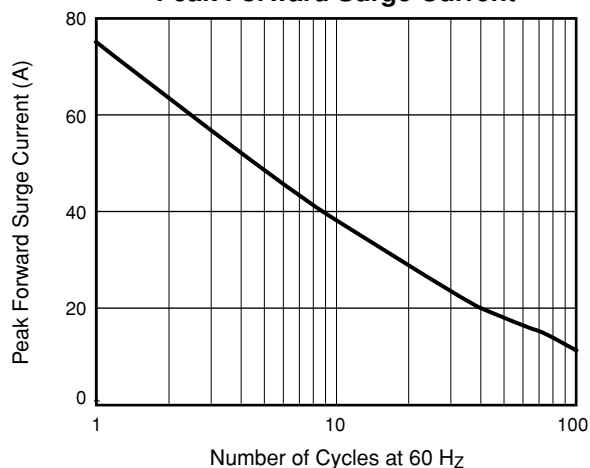


Fig. 3 – Typical Instantaneous Forward Characteristics

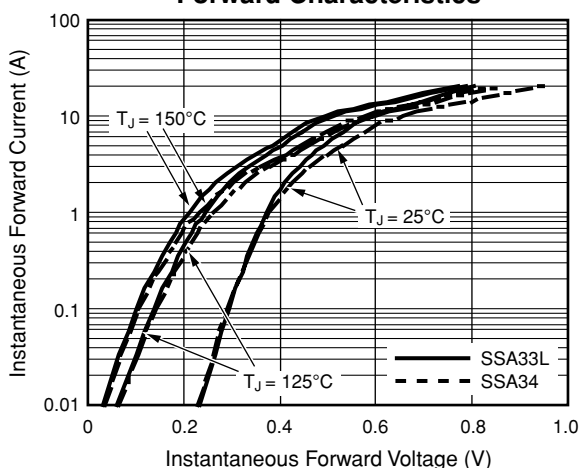


Fig. 4 – Typical Reverse Characteristics

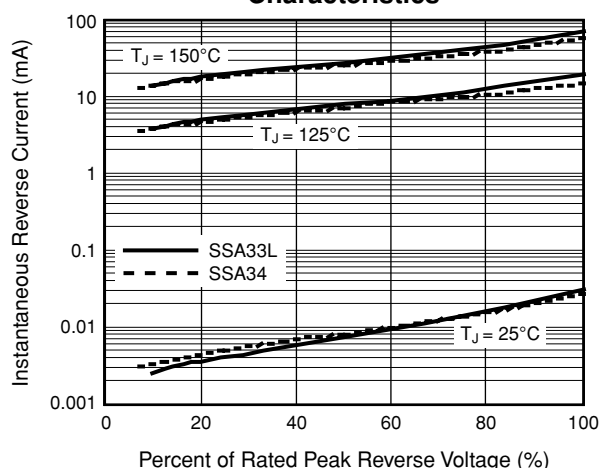


Fig. 5 – Typical Junction Capacitance

