

25kV 30mA HIGH VOLTAGE DIODE

HVRL250 is high reliability resin molded type high voltage diode in small size package which is sealed a multilayered mesa type silicon chip by epoxy resin.

Features

- High speed switching
- Low VF
- High surge resistivity for CRT discharge
- High reliability design
- Ultra small package


Applications

- X light Power supply
- Laser
- Voltage doubler circuit
- Microwave emission power

Maximum Ratings and Characteristics

- Absolute Maximum Ratings

Outline Drawings : mm

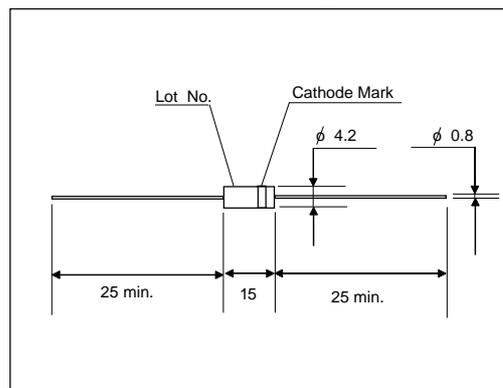

Cathode Mark

Type	Mark
HVRL250	

Items	Symbols	Condition	HVRL250	Units
Repetitive Peak Reverse Voltage	V_{RRM}		25	kV
Average Output Current	I_o	Ta=25°C, Resistive Load	30	mA
Surge Current	I_{FSM}	10mS Sine-half wave peak value	5.0	A _{peak}
Junction Temperature	T _J		155	°C
Allowable Operation Case Temperature	T _c		125	°C
Storage Temperature	T _{stg}		-40 to +155	°C

- Electrical Characteristics (Ta=25°C Unless otherwise specified)

Items	Symbols	Conditions	HVRL250	Units
Maximum Forward Voltage Drop	V_F	at 25°C, I _F =I _{F(AV)}	40	V
Maximum Reverse Current	IR1	at 25°C, V _R =25kV	2.0	μA
	IR2	at 100°C, V _R =25kV	20	μA
Maximum Reverse Recovery Time	T _{rr}	at 25°C, I _F =2mA, I _R =4mA	100	nS
Junction Capacitance	C _j	at 25°C, V _R =0V, f=1MHz	1.0	pF