



[查询SSM2020供应商](#)

**Solid State  
Micro Technology**  
for Music

[捷多邦，专业PCB打样工厂，24小时加急出货](#)

**SSM  
2020**

## DUAL LINEAR-ANTILOG VOLTAGE CONTROLLED AMPLIFIER

### DESCRIPTION

The SSM 2020 is a dual two quadrant multiplier designed to be used with op amps in a wide variety of precision audi-frequency applications including AGC circuits, Dividers and as a Biquad tuning element. Each channel has separate control and differential signal inputs and a current output. The device offers an exceptionally flexible control circuit for each channel which allows simultaneous linear and exponential voltage control of gain or either polarity of current control. Both channels are fully temperature compensated and have 86 dB signal-to-noise ratios at less than 0.1% distortion.

### FEATURES


- Max Supplies  $\pm 18V$
- Dual Design (Independent Control Selection)
- 2% Channel Gain Matching
- 100 dB Control Range
- Simultaneous Linear and Exponential Gain Control
- Differential Signal Inputs
- Current Output
- 86db Signal-to-Noise
- 0.1% Distortion
- Fully Temperature Compensated

### APPLICATIONS

- 2 and 4 Quadrant Multipliers
- Dividers
- AGC Circuits
- Voltage Controlled Filters
- Voltage Controlled Quadrature Oscillators
- Volume Controls
- Equalizers
- Compandors
- Antilog Amplifiers
- Voltage Controlled Current Sources



Pin Diagram

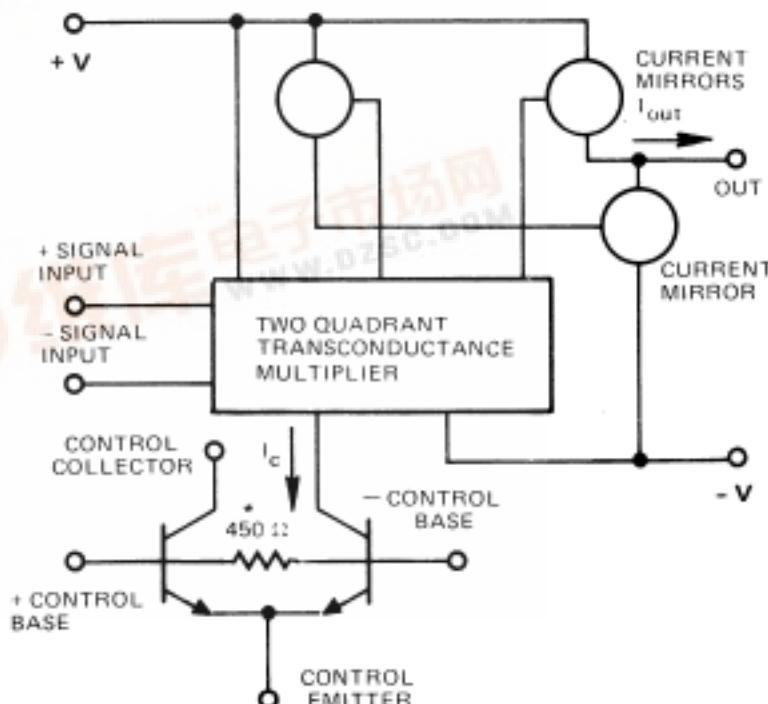

Equivalent Schematic (One Side)

## SPECIFICATIONS

$V_S = \pm 15V$ ,  $I_{c1} = I_{c2} = 500 \mu A$  and  $T_A = 25^\circ C$ , unless otherwise specified.

PARAMETERS	MIN	TYP	MAX	CONDITIONS
Signal Input Bias $I_b$ Supply Voltage $V_s$ Supply Current $I_s$ Control Current	$\pm 6$	500 nA $\pm 15$ 6 mA 1 mA	2.2 $\mu A$ $\pm 18$ 8 mA 1 mA	$V_{ee} + 3V \leq V_+ \leq V_- \leq V_{cc} - 3V$ $I_{c1} = I_{c2} = 1 \text{ mA}$
Transconductance gm gm match gm Temco	1/12 k $\Omega$	1/14 k $\Omega$ +2% 100 ppm/ $^\circ C$	1/16 k $\Omega$ $\pm 5\%$	$I_{c1} = I_{c2} = 1 \text{ mA}$
Control Circuit $V_{os}$		1 mV	3 mV	
Output Offset $I_o/I_c$ Control Rejection		$\pm 2\%$ 60 dB	$\pm 10\%$	$V_+ = V_- = \text{GND}$ (untrimmed) $0 \leq I_c \leq 1 \text{ mA}$ (trimmed)
450 $\Omega$ Resistor 450 $\Omega$ Temp Coef	350 $\Omega$	450 $\Omega$ +2000 ppm/ $^\circ C$	550 $\Omega$	
Channel Separation		100 dB		$F = 1 \text{ kHz}$
Bandwidth (3 dB)		1 MHz 300 kHz 30 kHz		$I_c = 1 \text{ mA}$ * $I_c = 10 \mu A$ $I_c = 100 \text{ nA}$
Feedthrough: -Input to Output + Input to Output		90 dB 100 dB		$F = 1 \text{ kHz}, I_c = 0$ $F = 1 \text{ kHz}, I_c = 0$
Signal/Noise		86 dB		$V_s = 6 \text{ V}_{pp}, I_c = 1 \text{ mA}$
Distortion (THD) VCA (Open Loop) VCF (Closed Loop) As below		0.1% 0.02%		$V_s = 6 \text{ V}_{pp}, I_c = 1 \text{ mA}$ $V_s = 6 \text{ V}_{pp}, I_c = 1 \text{ mA}$

\*Output at Virtual GND


## OPERATING TEMPERATURE

-25° C to +75° C — Commercial

-55° C to +125° C — Military

## STORAGE TEMPERATURE

-55° C to 125° C

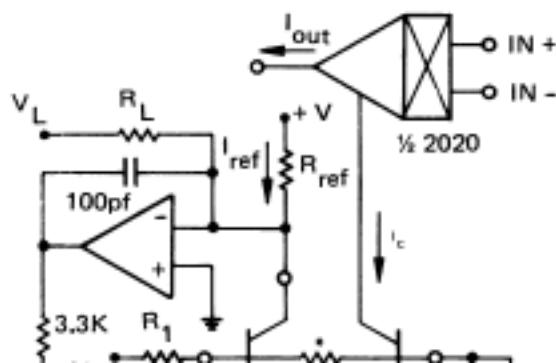


Basic Control Circuit

$$1) I_{out} = g_m (V_+ - V_-)$$


$$2) I_{out} = \frac{I_c (V_+ - V_-)}{14 \text{ volts}}$$

$$3) I_c = e^{-V_b q / KT} (+V/R_{ref} + V_L/R_L)$$


where  $V_b = \frac{V_c 450 \Omega}{R_1 + 450 \Omega}$

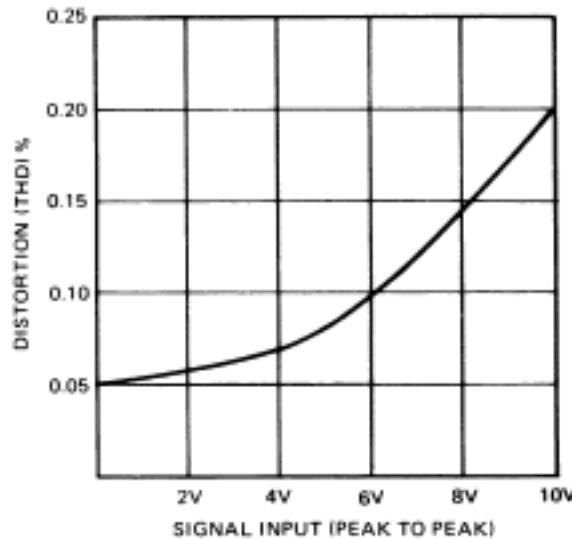


Distortion vs Signal Input

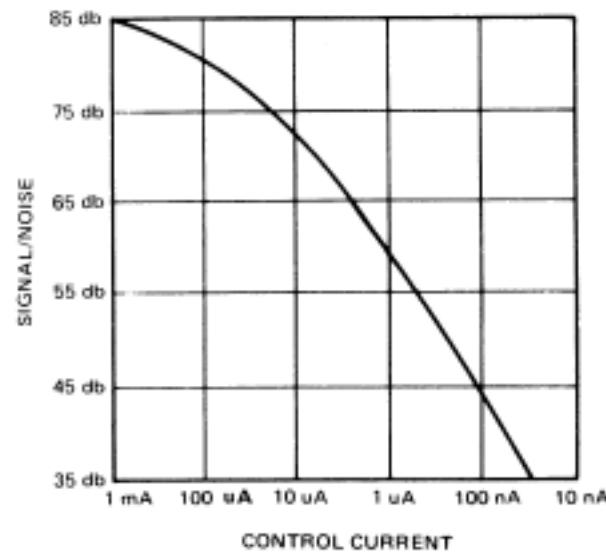


Signal Noise vs Control Current (6 Vpp in)

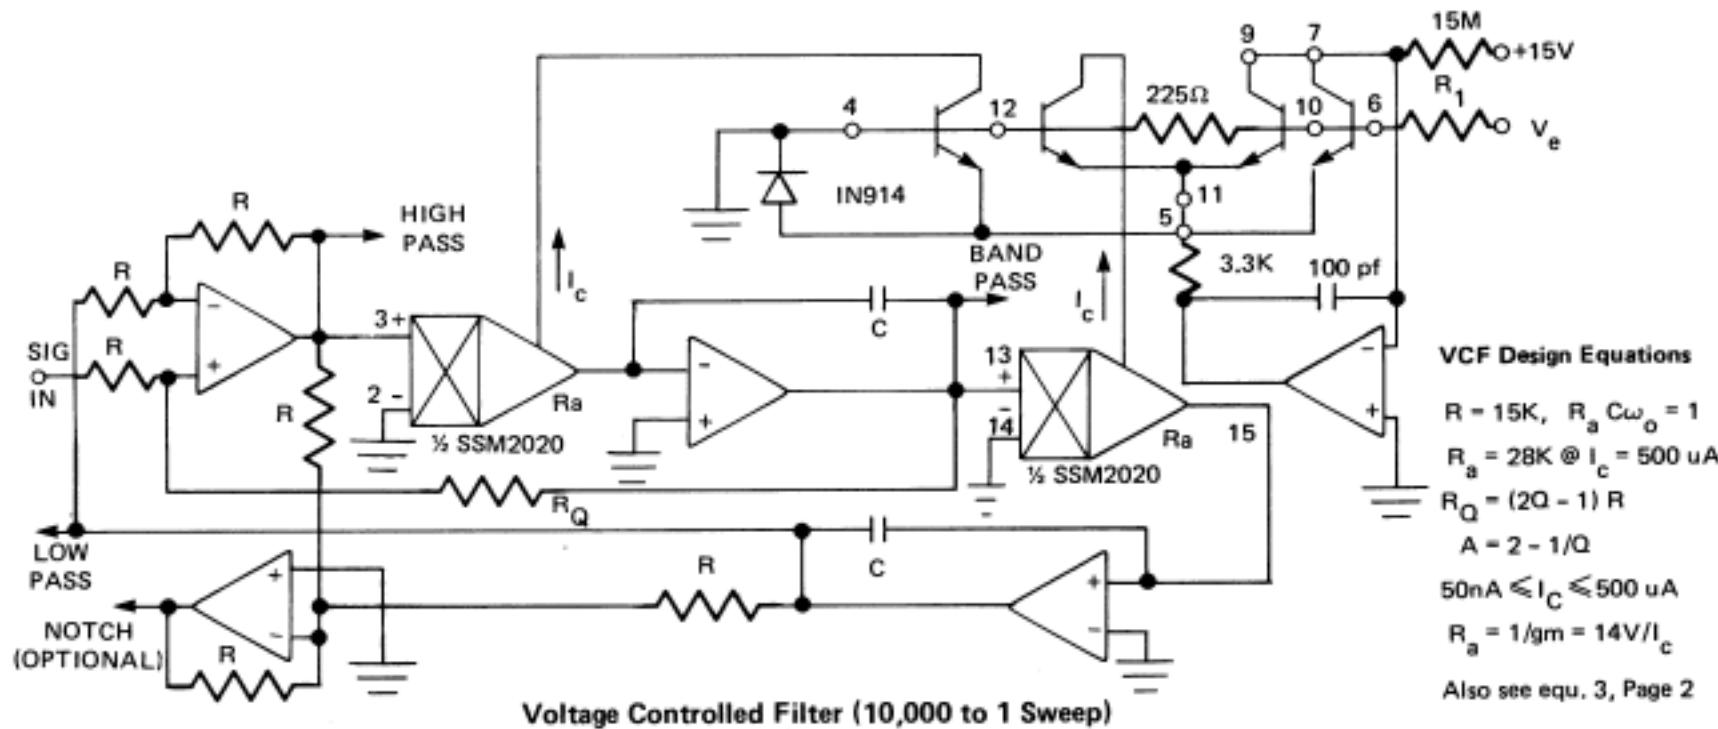

Voltage Controlled Filter (10,000 to 1 Sweep)

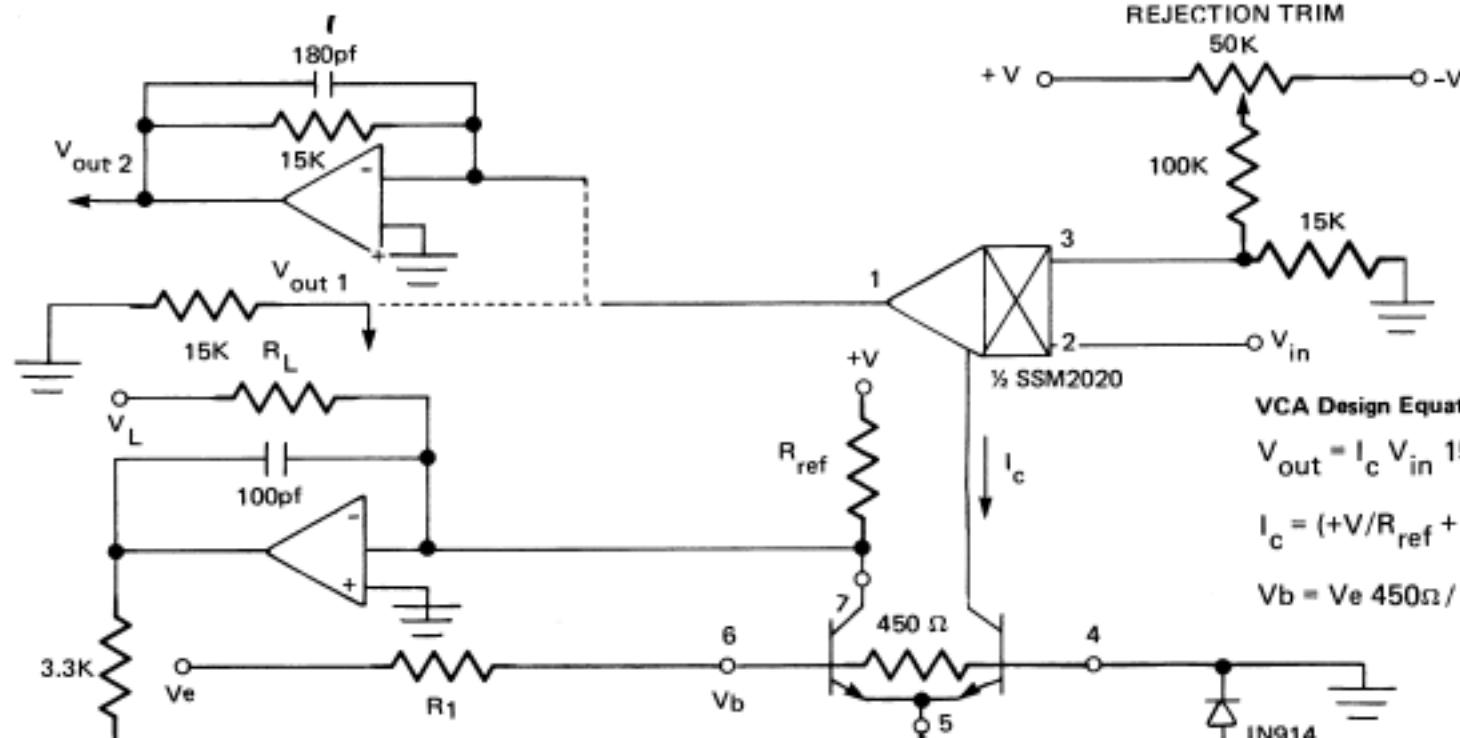


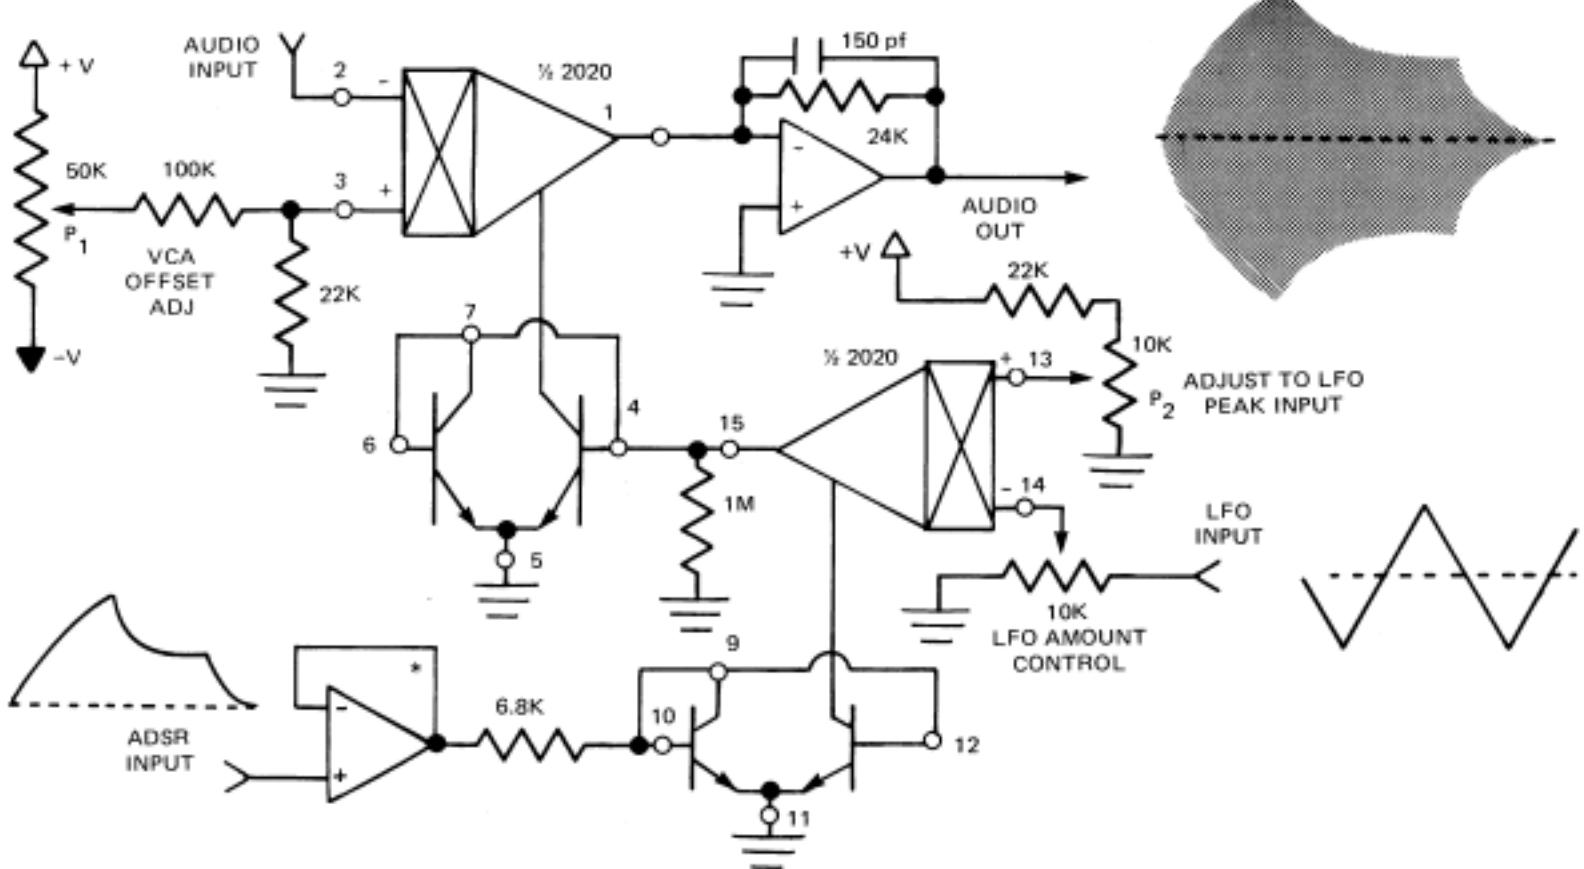


A single 2020 can be connected to add tremello to the output envelope of a VCA. Tremello depth can be controlled from 0 to 100%. The adjustment procedure is to apply an audio input to the VCA, turn the LFO amount control all the way on and gate and hold on the ADSR. Trimpot P<sub>2</sub> is then adjusted to give 100% modulation at the VCA output. The VCA offset trimpot P<sub>1</sub> is then adjusted to center the VCA output about ground.

#### VCA Control Envelopes


0% LFO MODULATION

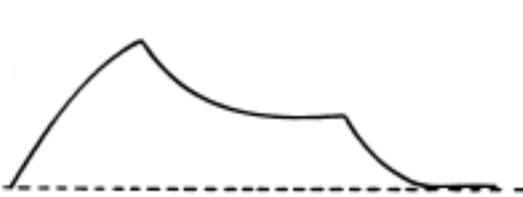

30% LFO MODULATION

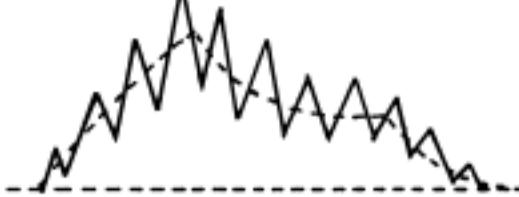

100% LFO MODULATION

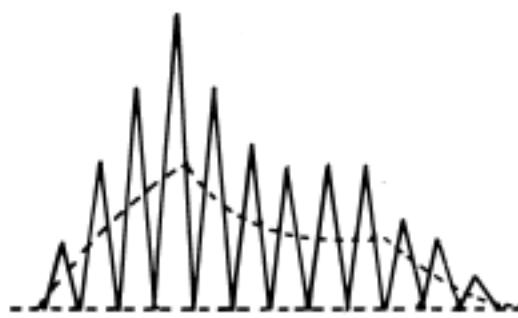

\*Buffer required if driving 6.8K load from output of SSM 2050. Not needed for SSM 2055.

**Solid State Micro**



**Technology  
for Music**