TOSHIBA BIPOLAR LINEAR INTEGRATED CIRCUIT SILICON MONOLITHIC

T A 7 2 5 6 P


DUAL POWER OPERATIONAL AMPLIFIER


The TA7256P is a dual power operational amplifier. It is intended for use especially DC MOTOR positioning system applications such as, Arm Driver (for Audiodisk Players), head or voice coil motor drivers (for Floppy and Winchester Disk Drivers) and any other power driver applications.

FEATURES

- HSIP 10Pin Power Package Capsealed.
- Build-in Over Current Protector.
- Few External Parts Required.
- Output Current Up to 1.0A (PEAK)

BLOCK DIAGRAM





Weight: 2.47g (Typ.)

TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.

The products described in this document are subject to foreign exchange and foreign trade control laws.

The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.

The information contained herein is subject to change without notice.

PIN FUNCTION

PIN No.	PIN SYMBOL	FUNCTIONAL DESCRIPTION			
1	VSENSE1	AMP.1 output current sensing terminal.			
2	V _{OUT1}	AMP.1 output terminal.			
3	- V _{IN1}	AMP.1 input terminal (-).			
4	+ VIN1	AMP.1 input terminal (+).			
5	V _{EE}	Negative-side power supply terminal.			
6	+ V _{IN2}	AMP.2 input terminal (+).			
7	-V _{IN2}	AMP.2 input terminal (-).			
8	VOUT2	AMP.2 output terminal.			
9	V _{SENSE2}	AMP.2 output current sensing terminal.			
10	V _{CC}	Possitive-side power supply terminal.			


MAXIMUM RATINGS (Ta = 25° C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Supply Voltage	V _{CC} , V _{EE}	± 18	V
Output Current	lO (AVE.)	0.5	Α
Power Dissipation	P _D (Note)	12.5	W
Operating Temperature	T _{opr}	- 30∼75	°C
Storage Temperature	T _{stg}	- 55∼150	°C


(Note) $Tc = 25^{\circ}C$

ELECTRICAL CHARACTERISTICS (Unless otherwise specified, $V_{CC} = 15V$, $V_{EE} = -15V$, Ta = 25°C)

CHARACTERISTIC		SYMBOL	TEST CIR- CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Quiescent Current		lcc	_	_	_	10	20	mΑ
Input Off Set Current		¹ 10	<u> </u>	_	_	10	200	nA
Input Bias Current		Ц	_	_	_	100	700	nA
Input Off Set Voltage		V _{IO}	_	_	1	2	6	mV
Output Valtage Suing	Upper	Voн	-	$R_L = 33\Omega$	12	13.0	_	V
Output Voltage Swing	Lower	VOL			– 12	- 13.0	_	
Open Loop Gain		GVO	_	_	_	100	_	dB
Input Common Mode Voltage Range		CMR	_	_	± 12	± 14	_	
Common Mode Rejection Ratio		CMRR	_	_	70	90		dB
Supply Voltage Rejection Ratio		SVRR	_	_	_	50	150	$\mu V/V$
Band Width		fT	_	Open loop	_	1.0	_	MHz
Slew Rate		SR		$G_V = 0$, $R_L = 33\Omega$ $R = 10\Omega$, $C = 0.1\mu$ F	_	0.15	_	V / μ s
Short Circuit Current		I _{SC}		$R_{SC} = 2.2\Omega$		0.35	_	Α
Cross Talk		C _T	_	$R_L = 33\Omega$, $V_{OUT} = 1V_{p-p}$	_	60	_	dB

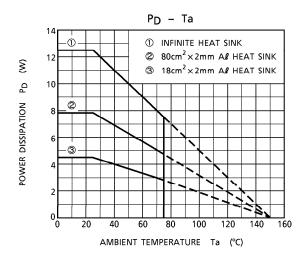


APPLICATION CIRCUIT 1

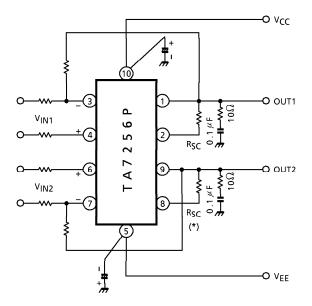


(*)
$$I_{SC} = \frac{0.77 \text{ (V)}}{R_{SC} \text{ (}\Omega\text{)}} \text{ (A)}$$

(Note) Utmost care is necessary in the design of the output line, V_{CC} and GND line since IC may be destroyed due to short-circuit between outputs, air contamination fault, or fault by improper grounding.

APPLICATION CIRCUIT 2 (Compact disk player use actuator system)

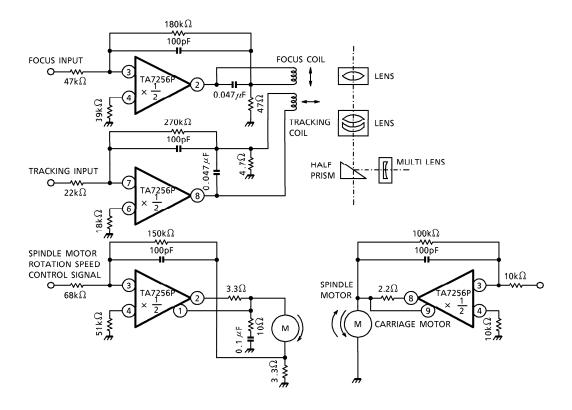

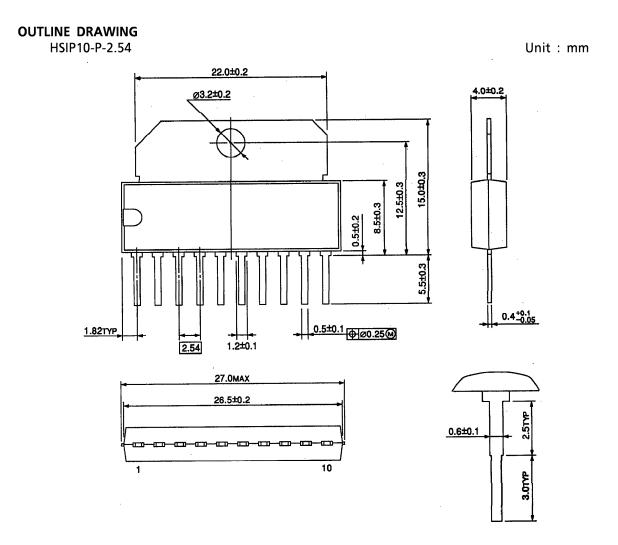

Weight: 2.47g (Typ.)