


- Low-Cost TV Color-Burst Crystal Sine-Wave Input Produces Highly Accurate and Stable Tones
- Device Powered Directly by Telephone or Small Batteries
- Keyboard or Electronic Input Capability
- Dual-Tone and Single-Tone Capability
- Minimal Standby Power Requirement
- Total Harmonic Distortion Meets EIA Standard RS-470
- PEP3 Processing Available
- Wide Supply-Voltage Range
- Minimal Parts Required
- Single-Tone Production Can be Inhibited
- Auxiliary Switching Outputs: One Bipolar Transistor and One CMOS Gate
- Designed to be Interchangeable with Mostek MK5087

## N PACKAGE (TOP VIEW)



**NOT RECOMMENDED FOR NEW DESIGN**

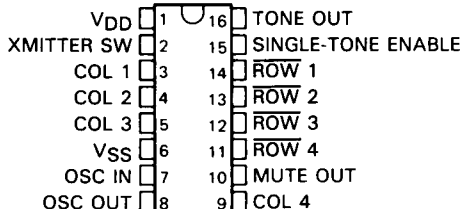

Caution. These devices have limited built-in gate protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

## description

The TCM5087 tone encoder is a CMOS integrated circuit designed specifically to generate the dial tones used in dual-tone telephone dialing systems. It requires a sine-wave input normally supplied by a low-cost TV color-burst crystal at 3.579545 MHz to generate eight different audio sinusoidal frequencies. With this input the encoder generates dial tones that are very low in total harmonic distortion and comply with standard Dual-Tone Multi-Frequency (DTMF) specifications without any need for frequency adjustment.

When generating a dual-tone signal, the encoder generates one column tone and one row tone and adds them for its output. The table below presents the frequencies produced by the tone encoder with the 3.579545-MHz TV-crystal signal input. Any deviation in this frequency will be reflected in the frequency output. The tolerance of the crystal is normally 0.02%.

| TONE     | DTMF<br>STANDARD<br>(Hz) | ENCODER<br>OUTPUT*<br>(Hz) | ERROR<br>FROM STANDARD*<br>(%) |
|----------|--------------------------|----------------------------|--------------------------------|
| Row 1    | 697                      | 701.3                      | +0.62                          |
| Row 2    | 770                      | 771.4                      | +0.19                          |
| Row 3    | 852                      | 857.2                      | +0.61                          |
| Row 4    | 941                      | 935.1                      | -0.63                          |
| Column 1 | 1209                     | 1215.9                     | +0.57                          |
| Column 2 | 1336                     | 1331.7                     | -0.32                          |
| Column 3 | 1477                     | 1471.9                     | -0.35                          |
| Column 4 | 1633                     | 1645                       | +0.73                          |

\*Using an input signal from a 3.579545-MHz crystal.

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS  
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1990, Texas Instruments Incorporated

# TCM5087 TONE ENCODER

## operation

### keyboard and electronic inputs

The specific tone or tones generated are determined by inputs designated  $\overline{\text{ROW}}$  1 through  $\overline{\text{ROW}}$  4 and COLUMN 1 through COLUMN 4. The inputs are normally received from a 2-of-8 DTMF (DPST) keyboard, a Class A (SPST) keyboard, or an electronic circuit. Unlike dynamic or scanned inputs, the static inputs of the TCM5087 do not generate noise. See function table for input and output description.



### single-tone enable input

This input inhibits the generation of single tones when taken low. All other chip functions remain unchanged. If the input is high or left open, single-tone operation is enabled.


### transmitter switch output

This output is at high impedance when one or more of the column inputs are active and is high when all column inputs are inactive. The output is the emitter of a bipolar transistor whose collector is at  $V_{DD}$ .

### mute output

The mute output is high when one or more column inputs are active and is low when all column inputs are inactive.

## functional block diagram

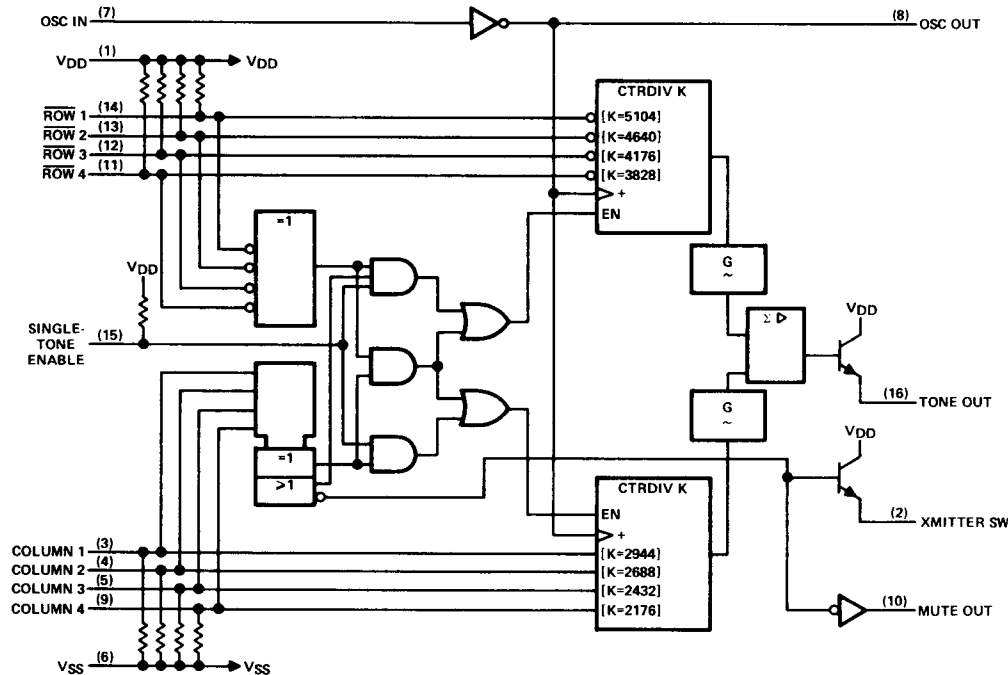

TONE ENCODER FUNCTION TABLE

| INPUT<br>COMBINATIONS†              | TONE OUTPUT    |                            | MUTE OUTPUT | TRANSMITTER SWITCH<br>OUTPUT |
|-------------------------------------|----------------|----------------------------|-------------|------------------------------|
|                                     | PIN 15‡ OPEN   | PIN 15‡ AT V <sub>SS</sub> |             |                              |
| 0 rows<br>0 columns                 | 0              | 0                          | L           | H                            |
| 1 row<br>1 column                   | Row and column | Row and column             | H           | Hi-Z                         |
| 2 or more rows<br>1 column          | Column         | 0                          | H           | Hi-Z                         |
| 1 row<br>2 or more columns          | Row            | 0                          | H           | Hi-Z                         |
| 2 or more rows<br>2 or more columns | 0              | 0                          | H           | Hi-Z                         |
| 0 rows<br>1 column                  | Column         | 0                          | H           | Hi-Z                         |
| 0 rows<br>2 or more columns         | 0              | 0                          | H           | Hi-Z                         |
| 1 or more rows<br>0 columns         | 0              | 0                          | L           | H                            |

†Row inputs will be active (on) when the input voltage is at a low level ( $V_I \neq V_{IL}$ ), and column inputs are active at a high input level. Under keyboard control, connecting a row input to a column input activates both.

‡Pin 15 is the single-tone disable input.

**absolute maximum ratings over operating free-air temperature range (unless otherwise noted)**

|                                                                        |                            |
|------------------------------------------------------------------------|----------------------------|
| Supply voltage $V_{DD}$ (see Note 1)                                   | 13.5 V                     |
| Input voltage range                                                    | -0.3 V to $V_{DD} + 0.3$ V |
| Output voltage range                                                   | -0.3 V to $V_{DD} + 0.3$ V |
| Continuous power dissipation at 25°C free-air temperature (see Note 2) | 1150 mW                    |
| Operating free-air temperature range, $T_A$                            | -30°C to 70°C              |
| Storage temperature range                                              | -55°C to 150°C             |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds           | 260°C                      |

NOTES: 1. All voltage values are with respect to the  $V_{SS}$  terminal.

2. For operation above 25°C free-air temperature, derate linearly to 736 mW at 70°C at the rate of 9.2 mW/°C.

**recommended operating conditions**

|                                                  |                     | MIN          | NOM | MAX          | UNIT               |
|--------------------------------------------------|---------------------|--------------|-----|--------------|--------------------|
| Supply voltage, $V_{DD}$                         |                     | 3.5          |     | 10           | V                  |
| High-level input voltage, $V_{IH}$               | Row inputs (off)    | 0.9 $V_{DD}$ |     | $V_{DD}$     | V                  |
|                                                  | All other inputs    | 0.7 $V_{DD}$ |     | $V_{DD}$     | V                  |
| Low-level input voltage, $V_{IL}$                | Column inputs (off) | $V_{SS}$     |     | 0.1 $V_{DD}$ | V                  |
|                                                  | All other inputs    | $V_{SS}$     |     | 0.3 $V_{DD}$ | V                  |
| Contact resistance between row and column inputs |                     |              |     | 100          | $\Omega$           |
| Tone-output load resistance, $R_L$               |                     | 120          | 330 | 620          | $\Omega$           |
| Operating free-air temperature, $T_A$            |                     | -30          |     | 70           | $^{\circ}\text{C}$ |

**electrical characteristics over operating free-air temperature range (unless otherwise noted)**

| PARAMETER                                                 |                                                 | TEST CONDITIONS                                 |  | MIN | TYP  | MAX | UNIT          |
|-----------------------------------------------------------|-------------------------------------------------|-------------------------------------------------|--|-----|------|-----|---------------|
| Column or row input                                       |                                                 |                                                 |  | 10  |      |     | k $\Omega$    |
| Single-tone-enable input resistance to $V_{DD}$           |                                                 | $T_A = 25^{\circ}\text{C}$                      |  | 20  |      | 100 | k $\Omega$    |
| $V_{OH}$ High-level output voltage                        | Mute output                                     | $V_{DD} = 3\text{ V}, I_{OH} = 0.2\text{ mA}$   |  | 2   |      |     | V             |
|                                                           |                                                 | $V_{DD} = 10\text{ V}, I_{OH} = 0.5\text{ mA}$  |  | 9   |      |     |               |
|                                                           | Transmitter switch output                       | $V_{DD} = 3.5\text{ V}, I_{OH} = -15\text{ mA}$ |  | 1.5 | 2.5  |     |               |
|                                                           |                                                 | $V_{DD} = 10\text{ V}, I_{OH} = -40\text{ mA}$  |  | 8   |      |     |               |
| $V_{OL}$ Low-level output voltage, mute output            | $V_{DD} = 3\text{ V}, I_{OL} = -0.2\text{ mA}$  |                                                 |  |     |      | 0.5 | V             |
|                                                           | $V_{DD} = 10\text{ V}, I_{OL} = -0.5\text{ mA}$ |                                                 |  |     |      | 0.5 |               |
| $I_{OL}$ Off-state current transmitter switch output      | $V_{DD} = 10\text{ V}, V_O = 0\text{ V}$        |                                                 |  |     |      | 10  | $\mu\text{A}$ |
| $I_{DDstby}$ Standby supply current with outputs unloaded | $V_{DD} = 3.5\text{ V}$                         |                                                 |  |     | 0.25 | 100 | $\mu\text{A}$ |
|                                                           | $V_{DD} = 10\text{ V}$                          |                                                 |  |     | 0.5  | 200 |               |
| $I_{DDop}$ Operating current                              | $V_{DD} = 3.5\text{ V}$ , See Note 3            |                                                 |  |     | 1    | 2   | mA            |
|                                                           | $V_{DD} = 10\text{ V}$ , See Note 3             |                                                 |  |     | 5    | 10  |               |

**operating characteristics over recommended ranges of operating free-air temperature and supply voltage (unless otherwise noted)**

| PARAMETER                                |             | TEST CONDITIONS <sup>†</sup>                        | MIN | TYP | MAX | UNIT |
|------------------------------------------|-------------|-----------------------------------------------------|-----|-----|-----|------|
| Output rms voltage                       | Row tone    | $R_L = 330\ \Omega$ ,<br>$T_A = 25^{\circ}\text{C}$ | 317 | 400 | 500 | mV   |
|                                          | Column tone |                                                     | 396 | 500 | 630 |      |
| Preemphasis (column tone to row tone)    |             |                                                     | 1   | 2   | 3   | dB   |
| Dual-tone output distortion (see Note 4) |             | $V_{DD} \geq 4\text{ V}$                            |     |     | -20 | dB   |
| Quiescent tone-output power              |             |                                                     |     |     | -80 | dBm  |
| Tone-output rise time (see Note 5)       |             |                                                     |     | 3   | 5   | ms   |

<sup>†</sup>Unless otherwise noted, test conditions are:  $R_L = 620\ \Omega$  for  $V_{DD} \leq 5\text{ V}$  or  $R_L = 330\ \Omega$  for  $V_{DD} > 5\text{ V}$ . Crystal parameters are the following:  $f = 3.579545\text{ MHz} \pm 0.02\%$ ,  $R_S < 100\ \Omega$ ,  $C_L = 18\text{ pF}$ ,  $C_M = 0.02\text{ pF}$ ,  $C_H = 5\text{ pF}$ ,  $L_M = 96\text{ mH}$ .


NOTES: 3. Operating current is measured with all outputs unloaded, one row input connected to one column input, and normal oscillator input ( $T_A$  at  $0^{\circ}\text{C}$  to  $70^{\circ}\text{C}$ ).

4. Distortion is expressed as the ratio of total out-of-band power relative to the total fundamental power for the dual tone.


5. This is the time required for output to change from its quiescent value to 90% of its final rms value.

## output waveforms


Typical row and column stairstep approximations of sinusoidal outputs are shown in Figures 1 and 2. The row and column outputs are added together resulting in a typical dual-tone waveform as shown in Figure 3. Spectral analysis of this dual-tone waveform shows that all harmonic and intermodulation distortions are typically 30 dB below the strongest column-tone fundamental.



0.2 ms/div  
**FIGURE 1**



0.2 ms/div  
**FIGURE 2**

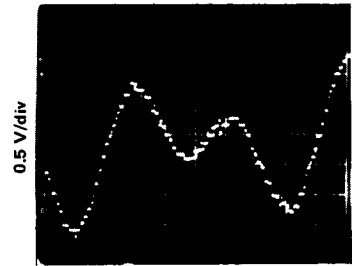

0.2 ms/div  
**FIGURE 3**

## distortion considerations

The following formula is used to calculate the total harmonic distortion of a single row or a single column:

$$\text{THD} = \left( \frac{\sqrt{V_{2f}^2 + V_{3f}^2 + V_{4f}^2 + V_{5f}^2 + \dots + V_{nf}^2}}{V_{1f}} \right) \times 100\%$$

where  $V_{2f}$  is the second harmonic of the fundamental frequency  $V_{1f}$  waveform and so on. The dual-tone total harmonic distortion is:

$$\text{THD} = \left( \frac{\sqrt{V_{2R}^2 + V_{3R}^2 + \dots + V_{nR}^2 + V_{2C}^2 + \dots + V_{nC}^2 + V_{\text{IMD}}^2}}{\sqrt{V_{FR}^2 + V_{FC}^2}} \right) \times 100\%$$

where  $V_{FR}$  and  $V_{FC}$  are the row and column fundamental frequency waveforms, and  $V_{2R}$  and  $V_{2C}$ , etc., are the corresponding harmonics.

The total intermodulation distortion is:

$$V_{\text{IMD}}^2 = (V_{1R} + V_{1C})^2 + (V_{1R} - V_{1C})^2 + \dots + (V_{nR} + V_{nC})^2 + (V_{nR} - V_{nC})^2$$

A relatively simple method of distortion measurement uses a spectrum analyzer to relate the harmonics to the fundamental frequency waveform. The tone encoder spectrum indicates the harmonics and intermodulation distortion at least 30 dB down relative to the column tone.

Another method for distortion measurement of the dual-tone waveform is to compare the total power in the fundamental frequencies with the total power in the various harmonics plus intermodulation on a signal analyzer. The encoders provide an output distortion of -20 dB maximum when operated between 3.5 V and 10 V. If operated between 3 V and 3.5 V, some clipping occurs at the output causing the distortion to exceed the -20 dB level.

APPLICATION INFORMATION

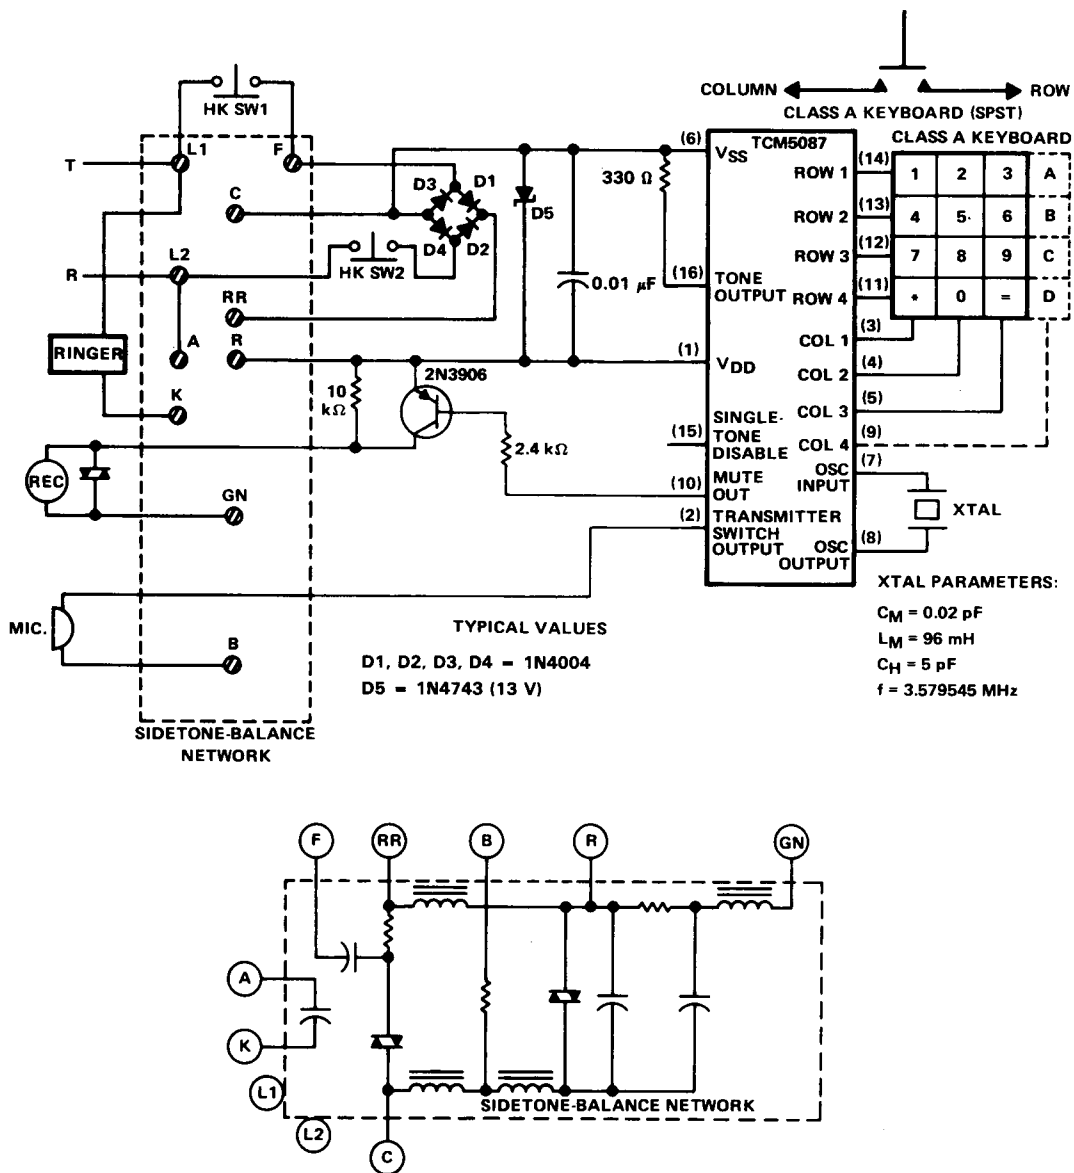


FIGURE 4. TYPICAL APPLICATION USING HYBRID COIL SIDETONE-BALANCE NETWORK, ELECTRONIC SWITCHING, AND LOW-COST (CLASS A) KEYBOARD

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

[www.AllDataSheet.com](http://www.AllDataSheet.com)

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

[www.AllDataSheet.com](http://www.AllDataSheet.com)