

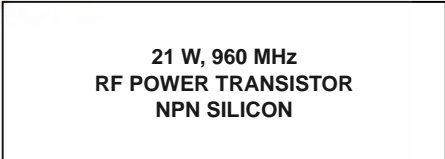


The RF Line NPN Silicon RF Power Transistor

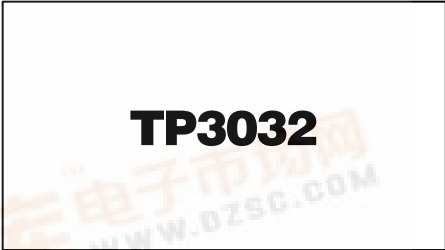

The TP3032 is designed for 26 volts, common emitter, 960 MHz base station amplifiers, for use in analog and digital systems.

- Specified 26 Volts, 960 MHz Characteristics
 Output Power — 21 Watts
 Gain — 7.5 dB min
- Silicon Nitride Passivated
- Gold Metallized, Emitter Ballasted for Long Life and Resistance to Metal Migration
- Class AB Operation
- Circuit board photomaster available upon request by contacting RF Tactical Marketing in Phoenix, AZ.

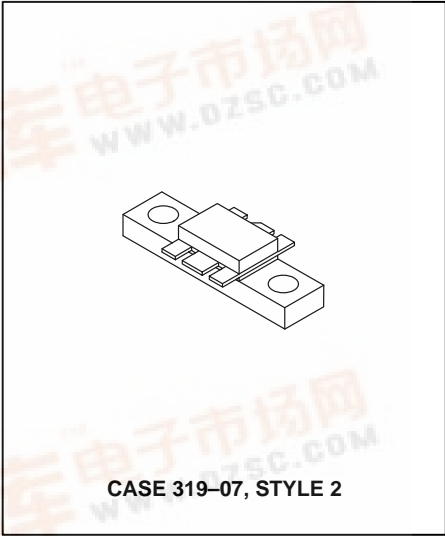

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector–Emitter Voltage	V_{CER}	40	Vdc
Collector–Base Voltage	V_{CBO}	48	Vdc
Emitter–Base Voltage	V_{EBO}	3.5	Vdc
Collector–Current — Continuous	I_C	4	Adc
Total Device Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D	52.5 0.3	Watts W/ $^\circ\text{C}$
Storage Temperature Range	T_{stg}	– 65 to +150	$^\circ\text{C}$
Operating Junction Temperature	T_J	200	$^\circ\text{C}$

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case (1)	$R_{\theta JC}$	3.3	$^\circ\text{C}/\text{W}$

ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise noted.)

Characteristic	Symbol	Min	Typ	Max	Unit
----------------	--------	-----	-----	-----	------

OFF CHARACTERISTICS

Collector–Emitter Breakdown Voltage ($I_C = 30\text{ mA}$, $R_{BE} = 75\ \Omega$)	$V_{(BR)CER}$	40	—	—	Vdc
Emitter–Base Breakdown Voltage ($I_E = 5\text{ mAdc}$)	$V_{(BR)EBO}$	3.5	—	—	Vdc
Collector–Base Breakdown Voltage ($I_C = 30\text{ mAdc}$)	$V_{(BR)CBO}$	48	—	—	Vdc
Collector–Emitter Leakage ($V_{CE} = 26\text{ V}$, $R_{BE} = 75\ \Omega$)	I_{CER}	—	—	8	mA

ON CHARACTERISTICS

DC Current Gain ($I_C = 1\text{ Adc}$, $V_{CE} = 10\text{ Vdc}$)	h_{FE}	15	—	80	—
--	----------	----	---	----	---

NOTE:

- Thermal resistance is determined under specified RF operating condition.

(continued)



ELECTRICAL CHARACTERISTICS — continued ($T_C = 25^\circ\text{C}$ unless otherwise noted.)


Characteristic	Symbol	Min	Typ	Max	Unit
----------------	--------	-----	-----	-----	------

DYNAMIC CHARACTERISTICS

Output Capacitance ($V_{CB} = 26\text{ V}$, $I_E = 0$, $f = 1\text{ MHz}$)	C_{ob}	—	30	—	pF
---	----------	---	----	---	----

FUNCTIONAL TESTS

Common-Emitter Amplifier Gain ($V_{CC} = 26\text{ V}$, $P_{out} = 21\text{ W}$, $I_{CQ} = 100\text{ mA}$, $f = 960\text{ MHz}$)	G_p	7.5	8.5	—	dB
Load Mismatch ($V_{CC} = 26\text{ V}$, $P_{out} = 21\text{ W}$, $I_{CQ} = 100\text{ mA}$, Load VSWR = 5:1, at All Phase Angles at Frequency of Test)	ψ	No Degradation in Output Power			
Collector Efficiency ($V_{CC} = 26\text{ V}$, $P_{out} = 21\text{ W}$, $f = 960\text{ MHz}$)	η	50	55	—	%
Over Drive ($V_{CC} = 26\text{ V}$, $P_{in} = 6\text{ W}$, $f = 960\text{ MHz}$)	OD	No Degradation in Output Power			

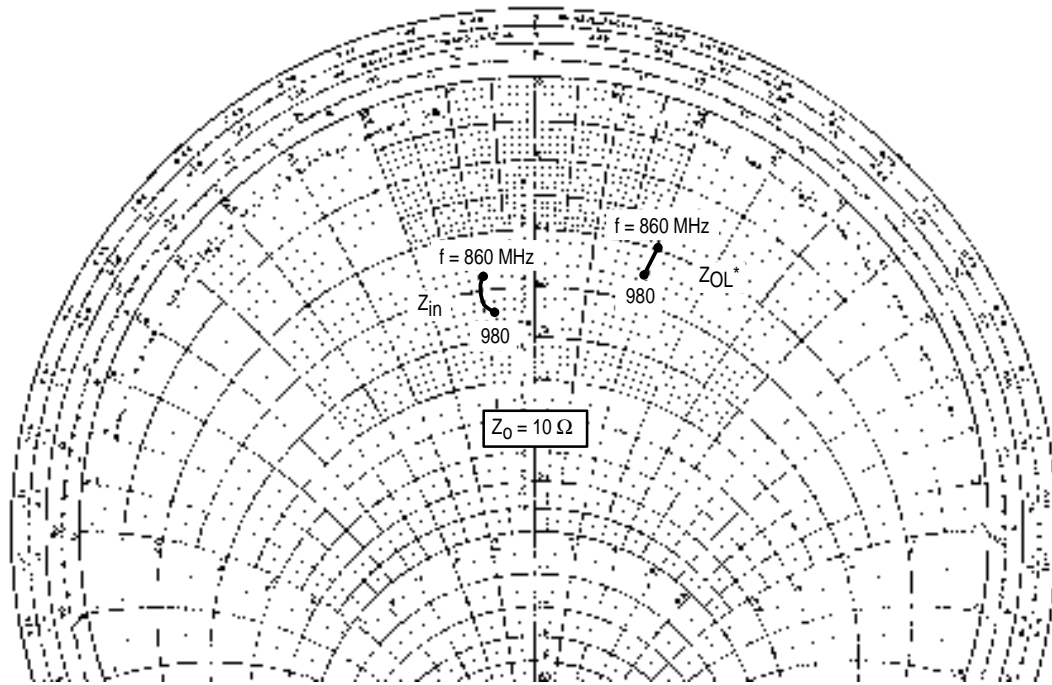


$V_{CE} = 26\text{ V}$ $P_{out} = 21\text{ W}$

f (MHz)	Z_{in} (Ω)	Z_{OL}^* (Ω)
860	$2.9 - j0.4$	$2 + j2.2$
880	$2.9 - j0.9$	$2.1 + j2.2$
900	$2.9 - j1.45$	$2.25 + j2.5$
935	$3.2 - j0.95$	$2.4 + j2.3$
960	$3.25 - j1.5$	$2.5 + j2$
980	$3.55 - j1.1$	$2.6 + j2.15$

Z_{OL}^* = Conjugate of optimum load impedance into which the device operates at a given output power, voltage, current and frequency.

Figure 1. Series Equivalent Input and Output Impedances

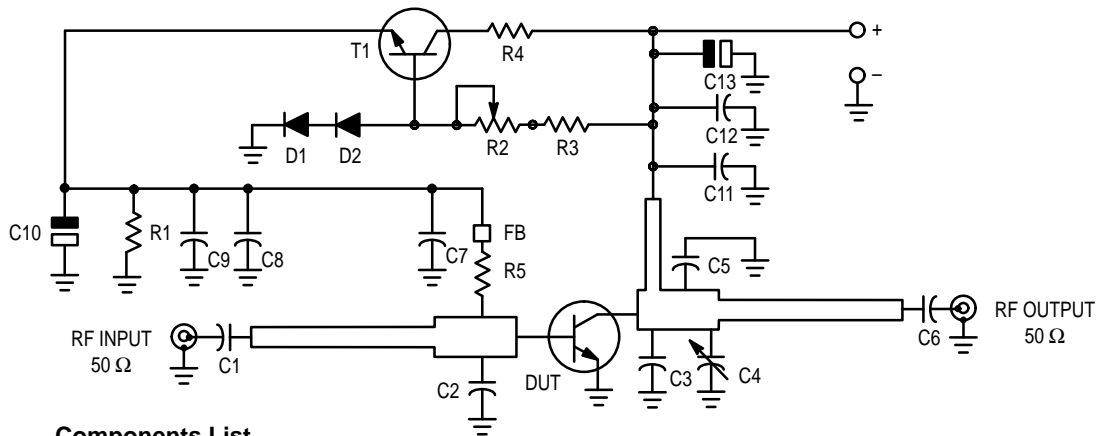

Components List

C1	300 pF, ATC Chip Capacitor 100B	D1,D2	Diode, 1N4148
C2	12 pF, ATC Chip Capacitor 100A	FB	Ferrite Bead
C3	10 pF, ATC Chip Capacitor 100A	R1	75 Ω, Chip Resistor 1206
C4	1–4.5 pF, Johanson Capacitor 9410–0	R2	10 kΩ, Trimmer Resistor
C5	6.8 pF, ATC Chip Capacitor 100A	R3	1 kΩ, 1/2 W, Resistor
C6	82 pF, ATC Chip Capacitor 100B	R4	82 Ω, 3 W, Resistor
C7,C8,C11	330 pF, Chip Capacitor	R5	1 Ω, 1/4 W, Resistor
C9,C12	15 nF, Chip Capacitor	T1	Transistor, BD135
C10,C13	6.8 μF, 35 V, Tantalum Capacitor		

Figure 2. 960 MHz Test Circuit Schematic

TYPICAL CHARACTERISTICS

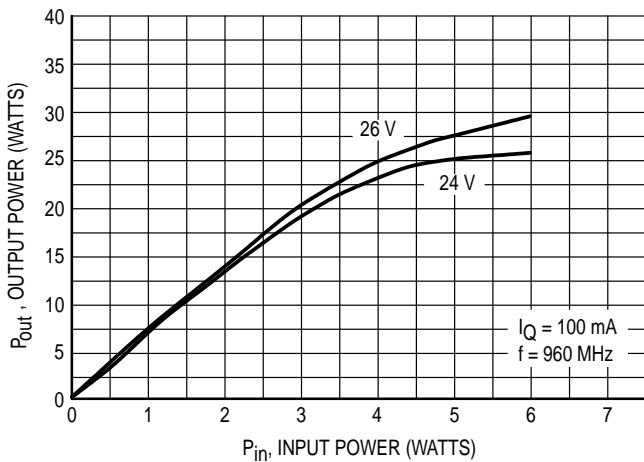


Figure 3. Output Power versus Input Power

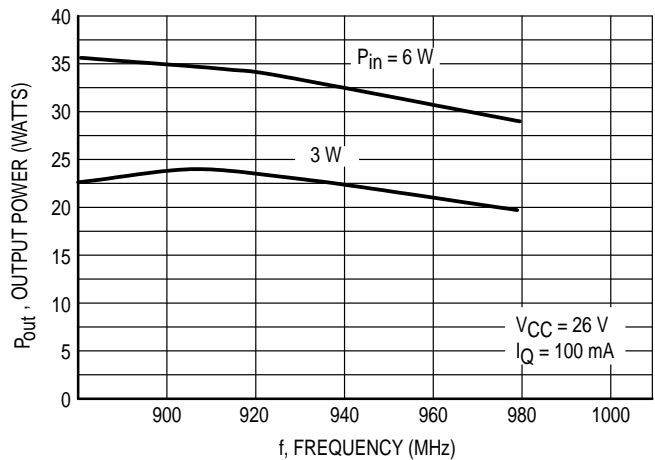


Figure 4. Output Power versus Frequency

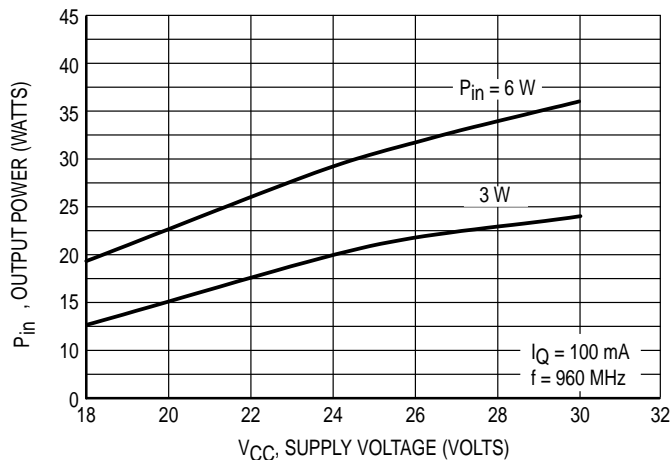


Figure 5. Output Power versus Supply Voltage


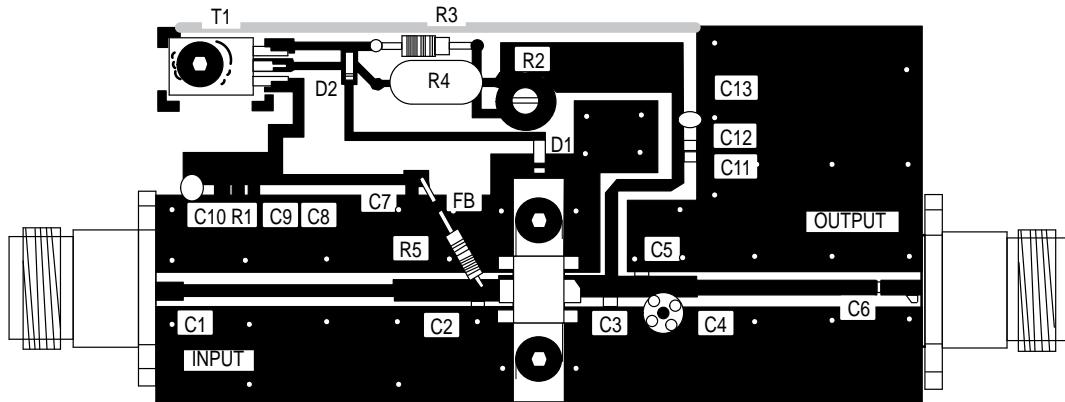


Figure 6. Test Circuit Components View

PACKAGE DIMENSIONS

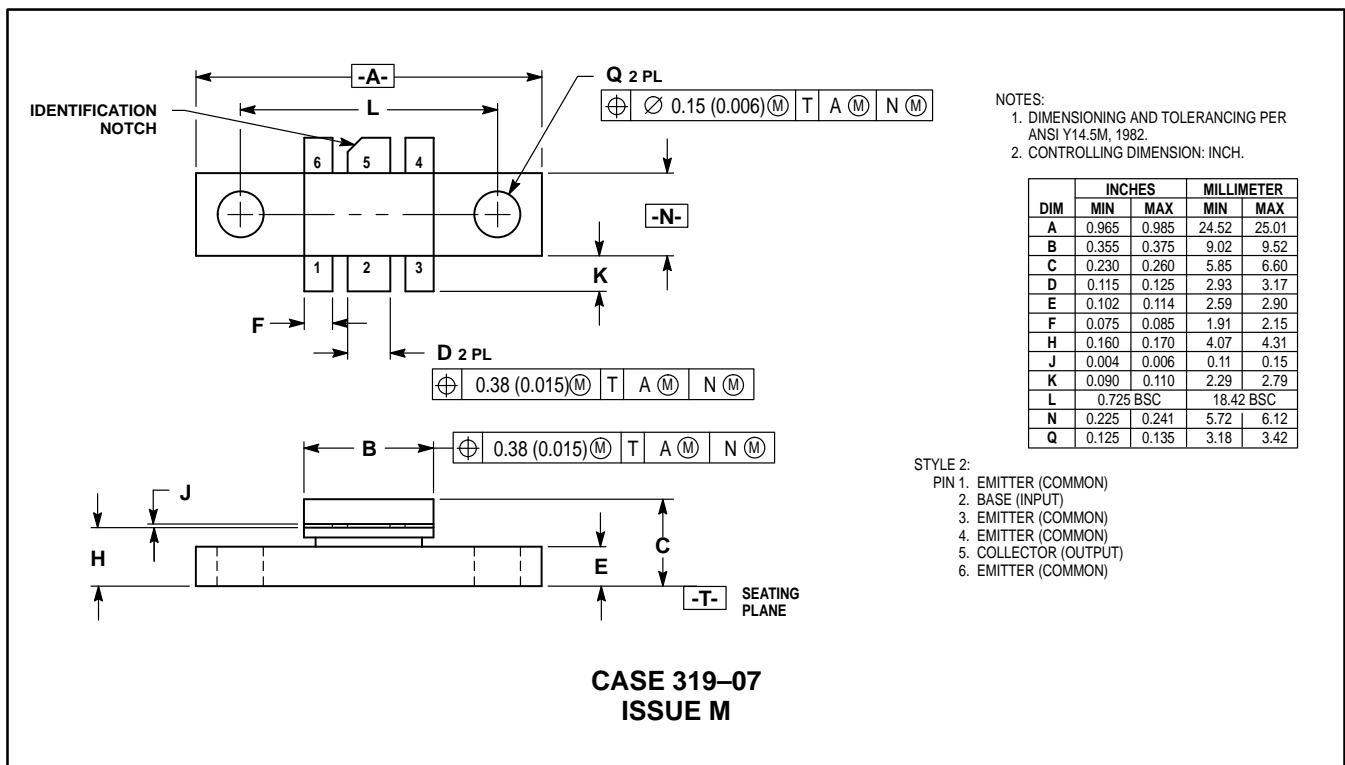

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Literature Distribution Centers:

- USA: Motorola Literature Distribution; P.O. Box 20912; Phoenix, Arizona 85036.
- EUROPE: Motorola Ltd.; European Literature Centre; 88 Tanners Drive, Blakelands, Milton Keynes, MK14 5BP, England.
- JAPAN: Nippon Motorola Ltd.; 4-32-1, Nishi-Gotanda, Shinagawa-ku, Tokyo 141, Japan.
- ASIA PACIFIC: Motorola Semiconductors H.K. Ltd.; Silicon Harbour Center, No. 2 Dai King Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong.