



UC2577-ADJ

# Simple Step-Up Voltage Regulator

## FEATURES

- Requires Few External Components
- NPN Output Switches 3.0A, 65V(max)
- Extended Input Voltage Range: 3.0V to 40V
- Current Mode Operation for Improved Transient Response, Line Regulation, and Current Limiting
- Soft Start Function Provides Controlled Startup
- 52kHz Internal Oscillator
- Output Switch Protected by Current Limit, Undervoltage Lockout and Thermal Shutdown
- Improved Replacement for LM2577-ADJ Series

## DESCRIPTION

The UC2577-ADJ device provides all the active functions necessary to implement step-up (boost), flyback, and forward converter switching regulators. Requiring only a few components, these simple regulators efficiently provide up to 60V as a step-up regulator, and even higher voltages as a flyback or forward converter regulator.

The UC2577-ADJ features a wide input voltage range of 3.0V to 40V and an adjustable output voltage. An on-chip 3.0A NPN switch is included with undervoltage lockout, thermal protection circuitry, and current limiting, as well as soft start mode operation to reduce current during startup. Other features include a 52kHz fixed frequency on-chip oscillator with no external components and current mode control for better line and load regulation.

A standard series of inductors and capacitors are available from several manufacturers optimized for use with these regulators and are listed in this data sheet.


## TYPICAL APPLICATIONS

- Simple Boost and Flyback Converters
- SEPIC Topology Permits Input Voltage to be Higher or Lower than Output Voltage
- Transformer Coupled Forward Regulators
- Multiple Output Designs

## CONNECTION DIAGRAM


### 5-Pin TO-220 (Top View)

### T Package

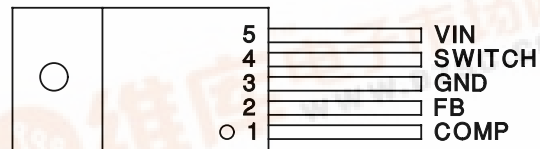

Also available in TO-263 Package (TD).

## BLOCK DIAGRAM

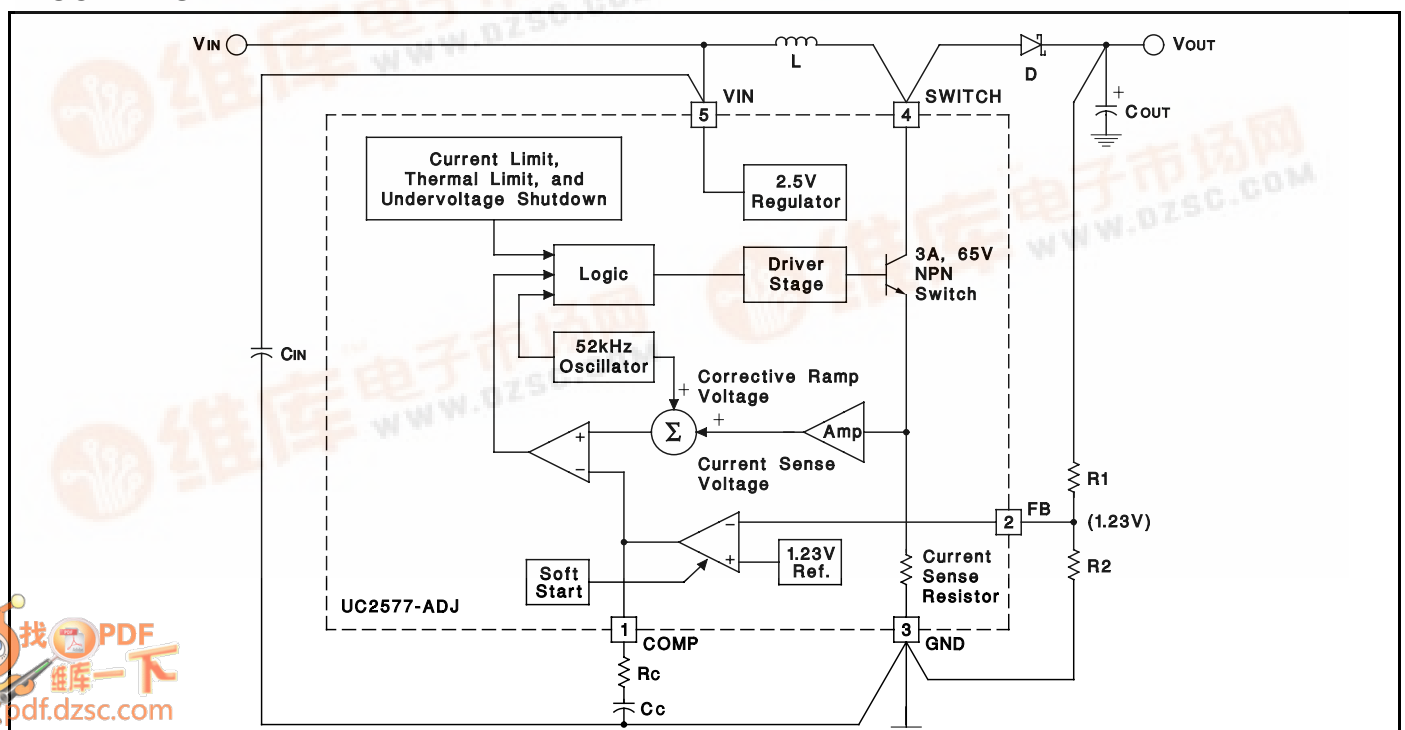

**ABSOLUTE MAXIMUM RATINGS** (Note 1)

|  |                    |
|--|--------------------|
| Supply Voltage                           | 45V                |
| Output Switch Voltage                    | 65V                |
| Output Switch Current (Note 2)           | 6.0A               |
| Power Dissipation                        | Internally Limited |
| Storage Temperature Range                | –65°C to +150°C    |
| Lead Temperature (Soldering, 10 sec.)    | 260°C              |
| Maximum Junction Temperature             | 150°C              |
| Minimum ESD Rating (C = 100pF, R = 15kΩ) | 2kV                |

**RECOMMENDED OPERATING RANGE**

|                            |  |
|----------------------------|--|
| Supply Voltage             | $3.0V \leq V_{IN} \leq 40V$                |
| Output Switch Voltage      | $0V \leq V_{SWITCH} \leq 60V$              |
| Output Switch Current      | $I_{SWITCH} \leq 3.0A$                     |
| Junction Temperature Range | $-40^{\circ}C \leq T_J \leq +125^{\circ}C$ |

**ELECTRICAL CHARACTERISTICS** Unless otherwise stated, these specifications apply for  $T_A = -40^{\circ}C$  to  $+125^{\circ}C$ ,  $V_{IN} = 5V$ ,  $V_{FB} = V_{REF}$ ,  $I_{SWITCH} = 0$ , and  $T_A = T_J$ .

| PARAMETER   | TEST CONDITIONS  | MIN       | TYP       | MAX       | UNITS     |
|---|--|-----------|-----------|-----------|-----------|
| <b>System Parameters</b> <i>Circuit Figure 1 (Note 3)</i> |  |           |           |           |           |
| Output Voltage  | $V_{IN} = 5V$ to $10V$ , $I_{LOAD} = 100mA$ to $800mA$           | 11.40     | 12.0      | 12.60     | V         |
|   | $T_J = 25^{\circ}C$  | 11.60     |           | 12.40     | V         |
| Line Regulation   | $V_{IN} = 3.0V$ to $10V$ , $I_{LOAD} = 300mA$                    |           | 20        | 100       | mV        |
|   | $T_J = 25^{\circ}C$  |           |           | 50        | mV        |
| Load Regulation   | $V_{IN} = 5V$ , $I_{LOAD} = 100mA$ to $800mA$                    |           | 20        | 100       | mV        |
|   | $T_J = 25^{\circ}C$  |           |           | 50        | mV        |
| Efficiency  | $V_{IN} = 5V$ , $I_{LOAD} = 800mA$                               |           | 80        |           | %         |
| <b>Device Parameters</b>                                  |  |           |           |           |           |
| Input Supply Current                                      | $V_{FB} = 1.5V$ (Switch Off)                                     |           | 7.5       | 14        | mA        |
|   | $T_J = 25^{\circ}C$  |           |           | 10        | mA        |
|   | $I_{SWITCH} = 2.0A$ , $V_{COMP} = 2.0V$ (Max Duty Cycle)         |           | 45        | 85        | mA        |
|   | $T_J = 25^{\circ}C$  |           |           | 70        | mA        |
| Input Supply UVLO   | $I_{SWITCH} = 100mA$   |           | 2.70      | 2.95      | V         |
|   | $T_J = 25^{\circ}C$  |           |           | 2.85      | V         |
| Oscillator Frequency                                      | Measured at SWITCH Pin, $I_{SWITCH} = 100mA$                     | 42        | 52        | 62        | kHz       |
|   | $T_J = 25^{\circ}C$  | 48        |           | 56        | kHz       |
| Reference Voltage   | Measured at FB Pin, $V_{IN} = 3.0V$ to $40V$ , $V_{COMP} = 1.0V$ | 1.206     | 1.230     | 1.254     | V         |
|   | $T_J = 25^{\circ}C$  | 1.214     |           | 1.246     | V         |
| Reference Voltage Line Regulation                         | $V_{IN} = 3.0V$ to $40V$   |           | 0.5       |           | mV        |
| Error Amp Input Bias Current                              | $V_{COMP} = 1.0V$  |           | 100       | 800       | nA        |
|   | $T_J = 25^{\circ}C$  |           |           | 300       | nA        |
| Error Amp Transconductance                                | $I_{COMP} = -30\mu A$ to $+30\mu A$ , $V_{COMP} = 1.0V$          | 1600      | 3700      | 5800      | $\mu mho$ |
|   | $T_J = 25^{\circ}C$  | 2400      |           | 4800      | $\mu mho$ |
| Error Amp Voltage Gain                                    | $V_{COMP} = 0.8V$ to $1.6V$ , $R_{COMP} = 1.0MW$ (Note 4)        | 250       | 800       |           | V/V       |
|   | $T_J = 25^{\circ}C$  | 500       |           |           | V/V       |
| Error Amplifier Output Swing                              | Upper Limit $V_{FB} = 1.0V$                                      | 2.0       | 2.4       |           | V         |
|   | $T_J = 25^{\circ}C$  | 2.2       |           |           | V         |
|   | Lower Limit $V_{FB} = 1.5V$                                      |           | 0.3       | 0.55      | V         |
|   | $T_J = 25^{\circ}C$  |           |           | 0.40      | V         |
| Error Amp Output Current                                  | $V_{FB} = 1.0V$ to $1.5V$ , $V_{COMP} = 1.0V$                    | $\pm 90$  | $\pm 200$ | $\pm 400$ | $\mu A$   |
|   | $T_J = 25^{\circ}C$  | $\pm 130$ |           | $\pm 300$ | $\mu A$   |
| Soft Start Current  | $V_{FB} = 1.0V$ , $V_{COMP} = 0.5V$                              | 1.5       | 5.0       | 9.5       | $\mu A$   |
|   | $T_J = 25^{\circ}C$  | 2.5       |           | 7.5       | $\mu A$   |
| Maximum Duty Cycle  | $V_{COMP} = 1.5V$ , $I_{SWITCH} = 100mA$                         | 90        | 95        |           | %         |
|   | $T_J = 25^{\circ}C$  | 93        |           |           | %         |

**ELECTRICAL CHARACTERISTICS** Unless otherwise stated, these specifications apply for  $T_A = -40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ ,  $V_{IN} = 5\text{V}$ ,  $V_{FB} = V_{REF}$ ,  $I_{SWITCH} = 0$ , and  $T_A = T_J$ .


| PARAMETER                        | TEST CONDITIONS  | MIN | TYP  | MAX | UNITS                |
|----------------------------------|--|-----|------|-----|----------------------|
| <b>Device Parameters (cont.)</b> |  |     |      |     |                      |
| Switch Transconductance          |  |     | 12.5 |     | A/V                  |
| Switch Leakage Current           | $V_{SWITCH} = 65\text{V}$ , $V_{FB} = 1.5\text{V}$ (Switch Off)        |     | 10   | 600 | $\mu\text{A}$        |
|                                  | $T_J = 25^{\circ}\text{C}$   |     |      | 300 | $\mu\text{A}$        |
| Switch Saturation Voltage        | $I_{SWITCH} = 2.0\text{A}$ , $V_{COMP} = 2.0\text{V}$ (Max Duty Cycle) |     | 0.5  | 0.9 | V                    |
|                                  | $T_J = 25^{\circ}\text{C}$   |     |      | 0.7 | V                    |
| NPN Switch Current Limit         | $V_{COMP} = 2.0\text{V}$   | 3.0 | 4.3  | 6.0 | A                    |
| Thermal Resistance               | Junction to Ambient  |     | 65   |     | $^{\circ}\text{C/W}$ |
|                                  | Junction to Case   |     | 2    |     | $^{\circ}\text{C/W}$ |
| COMP Pin Current                 | $V_{COMP} = 0$   |     | 25   | 50  | $\mu\text{A}$        |
|                                  | $T_J = 25^{\circ}\text{C}$   |     |      | 40  | $\mu\text{A}$        |

**Note 1:** Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating ratings indicate conditions during which the device is intended to be functional, but device parameter specifications may not be guaranteed under these conditions. For guaranteed specifications and test conditions, see the Electrical Characteristics.

**Note 2:** Output current cannot be internally limited when the UC2577 is used as a step-up regulator. To prevent damage to the switch, its current must be externally limited to 6.0A. However, output current is internally limited when the UC2577 is used as a flyback or forward converter regulator.

**Note 3:** External components such as the diode, inductor, input and output capacitors can affect switching regulator performance. When the UC2577 is used as shown in the Test Circuit, system performance will be as specified by the system parameters.

**Note 4:** A  $1.0\text{M}\Omega$  resistor is connected to the compensation pin (which is the error amplifier's output) to ensure accuracy in measuring  $A_{VOL}$ . In actual applications, this pin's load resistance should be  $\geq 10\text{M}\Omega$ , resulting in  $A_{VOL}$  that is typically twice the guaranteed minimum limit.

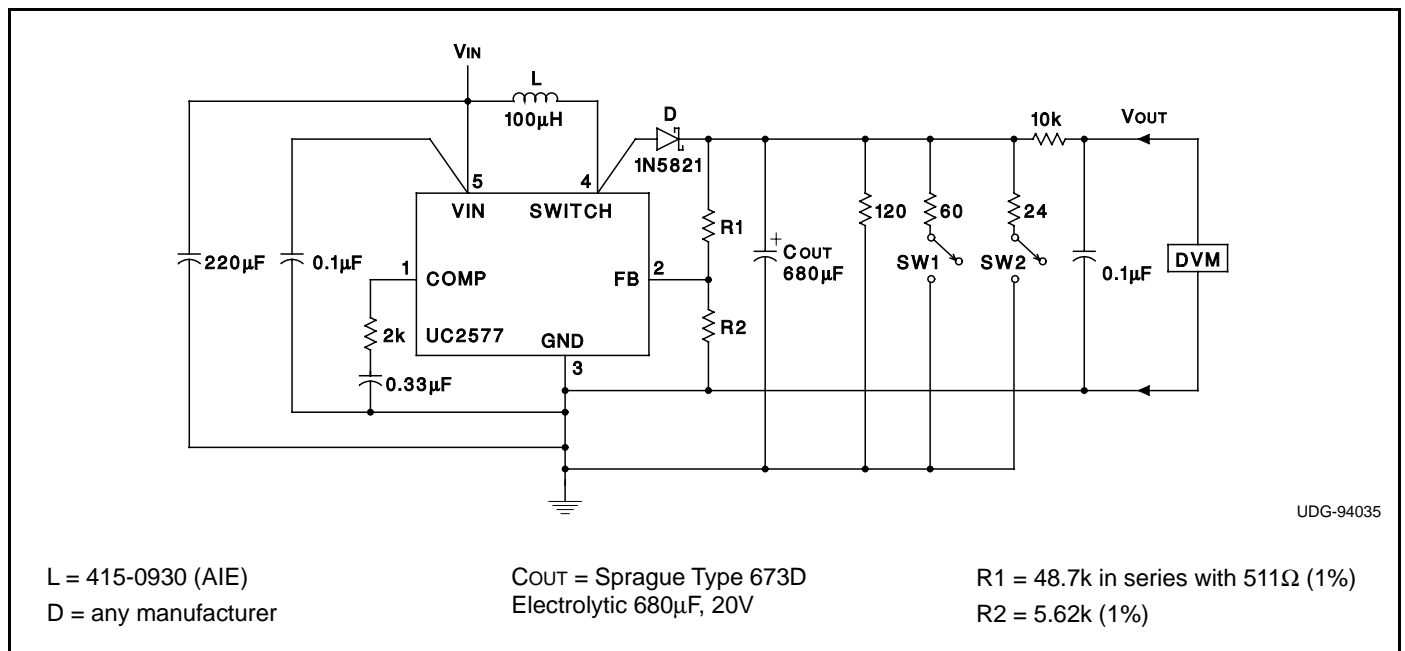

**Figure 1. Circuit Used to Specify System Parameters**

## APPLICATIONS INFORMATION

### Step-up (Boost) Regulator

The Block Diagram shows a step-up switching regulator utilizing the UC2577. The regulator produces an output voltage higher than the input voltage. The UC2577 turns its switch on and off at a fixed frequency of 52kHz, thus storing energy in the inductor (L). When the NPN switch is on, the inductor current is charged at a rate of  $V_{IN}/L$ . When the switch is off, the voltage at the SWITCH terminal of the inductor rises above  $V_{IN}$ , discharging the stored current through the output diode (D) into the output capacitor (C<sub>OUT</sub>) at a rate of  $(V_{OUT} - V_{IN})/L$ . The energy stored in the inductor is thus transferred to the output.

The output voltage is controlled by the amount of energy transferred, which is controlled by modulating the peak inductor current. This modulation is accomplished by feeding a portion of the output voltage to an error amplifier which amplifies the difference between the feedback voltage and an internal 1.23V precision reference voltage. The output of the error amplifier is then compared to a voltage proportional to the switch current, or the inductor current, during the switch on time. A comparator terminates the switch on time when the two voltages are equal and thus controls the peak switch current to maintain a constant output voltage. Figure 2 shows voltage and current waveforms for the circuit. Formulas for calculation are shown in Figure 3.

### STEP-UP REGULATOR DESIGN PROCEDURE

#### Refer to the Block Diagram

Given:

$V_{INmin}$  = Minimum input supply voltage

$V_{OUT}$  = Regulated output voltage

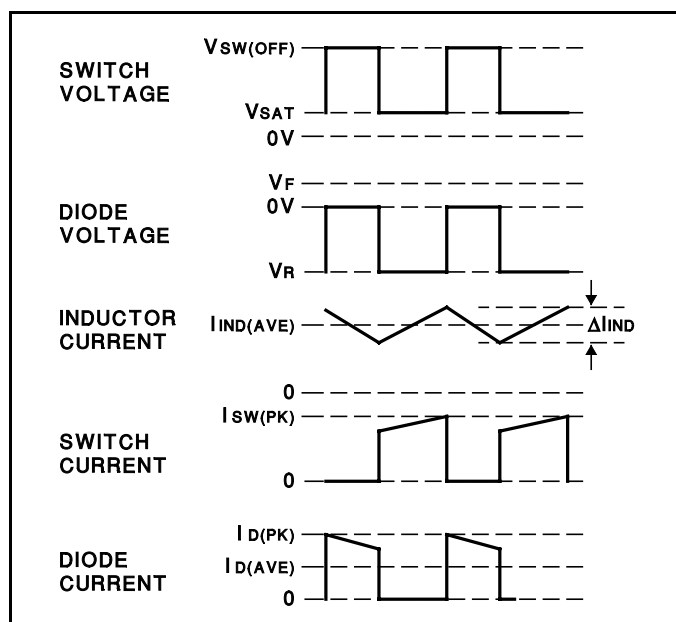


Figure 2. Step-up Regulator Waveforms

|                         |                  |  |
|-------------------------|------------------|--|
| Duty Cycle              | D                | $\frac{V_{OUT} + V_F - V_{IN}}{V_{OUT} + V_F - V_{SAT}} \approx \frac{V_{OUT} - V_{IN}}{V_{OUT}}$        |
| Avg. Inductor Current   | $I_{IND(AVG)}$   | $\frac{I_{LOAD}}{1 - D}$   |
| Inductor Current Ripple | $\Delta I_{IND}$ | $\frac{V_{IN} - V_{SAT}}{L} \cdot \frac{D}{52,000}$  |
| Peak Inductor Current   | $I_{IND(PK)}$    | $\frac{I_{LOAD}}{1 - D} + \frac{\Delta I_{IND}}{2}$  |
| Peak Switch Current     | $I_{SW(PK)}$     | $\frac{I_{LOAD}}{1 - D} + \frac{\Delta I_{IND}}{2}$  |
| Switch Voltage when Off | $V_{SW(OFF)}$    | $V_{OUT} + V_F$  |
| Diode Reverse Voltage   | $V_R$            | $V_{OUT} - V_{SAT}$  |
| Avg. Diode Current      | $I_{D(AVG)}$     | $I_{LOAD}$   |
| Peak Diode Current      | $I_{D(PK)}$      | $\frac{I_{LOAD}}{1 - D} + \frac{\Delta I_{IND}}{2}$  |
| Power Dissipation       | $P_D$            | $0.25\Omega \left( \frac{I_{LOAD}}{1 - D} \right)^2 D + \frac{I_{LOAD} \cdot D \cdot V_{IN}}{50(1 - D)}$ |

$V_F$  = Forward Biased Diode Voltage,  $I_{LOAD}$  = Output Load

Figure 3. Step-up Regulator Formulas

First, determine if the UC2577 can provide these values of  $V_{OUT}$  and  $I_{LOADmax}$  when operating with the minimum value of  $V_{IN}$ . The upper limits for  $V_{OUT}$  and  $I_{LOADmax}$  are given by the following equations.

$$V_{OUT} \leq 60V \text{ and}$$

$$V_{OUT} \leq 10 \cdot V_{INmin}$$

$$I_{LOADmax} \leq \frac{2.1A \cdot V_{INmin}}{V_{OUT}}$$

These limits must be greater than or equal to the values specified in this application.

#### 1. Output Voltage Section

Resistors R1 and R2 are used to select the desired output voltage. These resistors form a voltage divider and present a portion of the output voltage to the error amplifier which compares it to an internal 1.23V reference. Select R1 and R2 such that:

$$\frac{R1}{R2} = \frac{V_{OUT}}{1.23V} - 1$$

## APPLICATIONS INFORMATION (cont.)

### 2. Inductor Selection (L)

#### A. Preliminary Calculations

To select the inductor, the calculation of the following three parameters is necessary:

$D_{max}$ , the maximum switch duty cycle ( $0 \leq D \leq 0.9$ ):

$$D_{max} = \frac{V_{OUT} + V_F - V_{INmin}}{V_{OUT} + V_F - 0.6V}$$

where typically  $V_F = 0.5V$  for Schottky diodes and  $V_F = 0.8V$  for fast recovery diodes.

$E \bullet T$ , the product of volts  $\bullet$  time that charges the inductor:

$$E \bullet T = \frac{D_{max} \bullet (V_{INmin} - 0.6V) 10^6}{52,000\text{Hz}} (V \bullet \mu s)$$

$I_{IND, DC}$ , the average inductor current under full load:

$$I_{IND, DC} = \frac{1.05 \bullet I_{LOADmax}}{1 - D_{max}}$$

#### B. Identify Inductor Value:

1. From Figure 4, identify the inductor code for the region indicated by the intersection of  $E \bullet T$  and  $I_{IND, DC}$ . This code gives the inductor value in microhenries. The L or H prefix signifies whether the inductor is rated for a maximum  $E \bullet T$  of  $90V\mu s$  (L) or  $250V\mu s$  (H).

2. If  $D < 0.85$ , go to step C. If  $D \geq 0.85$ , calculate the minimum inductance needed to ensure the switching regulator's stability:

If  $L_{min}$  is smaller than the inductor values found in step B1, go on to step C. Otherwise, the inductor value found in step B1 is too low; an appropriate inductor code should be obtained from the graph as follows:

1. Find the lowest value inductor that is greater than  $L_{min}$ .
2. Find where  $E \bullet T$  intersects this inductor value to determine if it has an L or H prefix. If  $E \bullet T$  intersects both the L and H regions, select the inductor with an H prefix.


#### C. Inductor Selection

Select an inductor from the table of Figure 5 which cross references the inductor codes to the part numbers of the three different manufacturers. The inductors listed in this table have the following characteristics:

**A/E** (ferrite, pot-core inductors): Benefits of this type are low electromagnetic interference (EMI), small physical size, and very low power dissipation (core loss).

**Pulse** (powdered iron, toroid core inductors): Benefits are low EMI and ability to withstand  $E \bullet T$  and peak current above rated value better than ferrite cores.

**Renco** (ferrite, bobbin-core inductors): Benefits are low cost and best ability to withstand  $E \bullet T$  and peak current above rated value. Be aware that these inductors generate more EMI than the other types, and this may interfere with signals sensitive to noise.

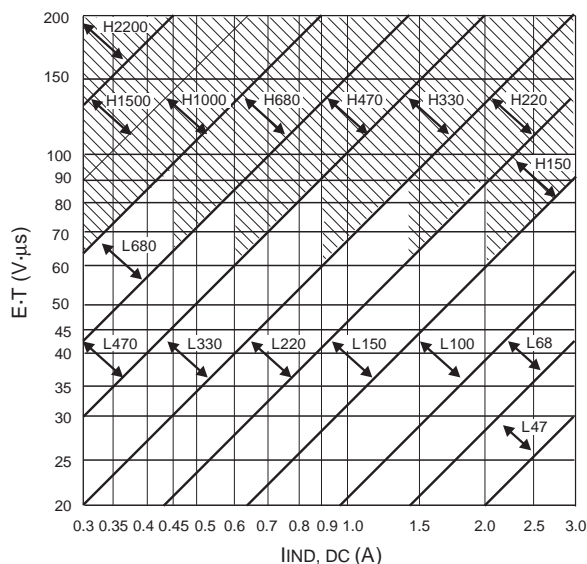

Note: This chart assumes that the inductor ripple current inductor is approximately 20% to 30% of the average inductor current (when the regulator is under full load). Greater ripple current causes higher peak switch currents and greater output ripple voltage. Lower ripple current is achieved with larger value inductors. The factor of 20% to 30% is chosen as a convenient balance between the two extremes.

Figure 4. Inductor Selection Graph

## APPLICATIONS INFORMATION (cont.)

| Inductor Code | Manufacturer's Part Number |            |        |
|---------------|----------------------------|------------|--------|
|               | AIE                        | Pulse      | Renco  |
| L47           | 415 - 0932                 | PE - 53112 | RL2442 |
| L68           | 415 - 0931                 | PE - 92114 | RL2443 |
| L100          | 415 - 0930                 | PE - 92108 | RL2444 |
| L150          | 415 - 0953                 | PE - 53113 | RL1954 |
| L220          | 415 - 0922                 | PE - 52626 | RL1953 |
| L330          | 415 - 0926                 | PE - 52627 | RL1952 |
| L470          | 415 - 0927                 | PE - 53114 | RL1951 |
| L680          | 415 - 0928                 | PE - 52629 | RL1950 |
| H150          | 415 - 0936                 | PE - 53115 | RL2445 |
| H220          | 430 - 0636                 | PE - 53116 | RL2446 |
| H330          | 430 - 0635                 | PE - 53117 | RL2447 |
| H470          | 430 - 0634                 | PE - 53118 | RL1961 |
| H680          | 415 - 0935                 | PE - 53119 | RL1960 |
| H1000         | 415 - 0934                 | PE - 53120 | RL1959 |
| H1500         | 415 - 0933                 | PE - 53121 | RL1958 |
| H2200         | 415 - 0945                 | PE - 53122 | RL2448 |

**AIE Magnetics, Div. Vernitron Corp.**, (813)347-2181  
2801 72nd Street North, St. Petersburg, FL 33710

**Pulse Engineering**, (619)674-8100  
12220 World Trade Drive, San Diego, CA 92128

**Renco Electronics, Inc.**, (516)586-5566  
60 Jeffryn Blvd. East, Deer Park, NY 11729

**Figure 5. Table of Standardized Inductors and Manufacturer's Part Numbers**

### 3. Compensation Network (Rc, Cc) and Output Capacitor (COUT) Selection

The compensation network consists of resistor Rc and capacitor Cc which form a simple pole-zero network and stabilize the regulator. The values of Rc and Cc depend upon the voltage gain of the regulator, ILOADmax, the inductor L, and output capacitance COUT. A procedure to calculate and select the values for Rc, Cc, and COUT which ensures stability is described below. It should be noted, however, that this may not result in optimum compensation. To guarantee optimum compensation a standard procedure for testing loop stability is recommended, such as measuring VOUT transient responses to pulsing ILOAD.

*A. Calculate the maximum value for Rc.*

$$R_C \leq \frac{750 \cdot I_{LOADmax} \cdot V_{OUT}^2}{V_{INmin}^2}$$

Select a resistor less than or equal to this value, not to exceed 3kΩ.

*B. Calculate the minimum value for COUT using the following two equations.*

$$C_{OUT} \geq \frac{0.19 \cdot L \cdot R_C \cdot I_{LOADmax}}{V_{INmin} \cdot V_{OUT}} \quad \text{and}$$

$$C_{OUT} \geq \frac{V_{INmin} \cdot R_C \cdot (V_{INmin} + (3.74 \cdot 10^5 \cdot L))}{487,800 \cdot V_{OUT}^3}$$

The larger of these two values is the minimum value that ensures stability.

*C. Calculate the minimum value of Cc.*

$$C_C \geq \frac{58.5 \cdot V_{OUT}^2 \cdot C_{OUT}}{R_C^2 \cdot V_{INmin}}$$

The compensation capacitor is also used in the soft start function of the regulator. When the input voltage is applied to the part, the switch duty cycle is increased slowly at a rate defined by the compensation capacitor and the soft start current, thus eliminating high input currents. Without the soft start circuitry, the switch duty cycle would instantly rise to about 90% and draw large currents from the input supply. For proper soft starting, the value for Cc should be equal or greater than 0.22μF.

Figure 6 lists several types of aluminum electrolytic capacitors which could be used for the output filter. Use the following parameters to select the capacitor.

**Working Voltage (WVDC):** Choose a capacitor with a working voltage at least 20% higher than the regulator output voltage.

**Ripple Current:** This is the maximum RMS value of current that charges the capacitor during each switching cycle. For step-up and flyback regulators, the formula for ripple current is:

$$I_{RIPPLErms} = \frac{I_{LOADmax} \cdot D_{max}}{1 - D_{max}}$$

Choose a capacitor that is rated at least 50% higher than this value at 52kHz.

**Equivalent Series Resistance (ESR):** This is the primary cause of output ripple voltage, and it also affects the values of Rc and Cc needed to stabilize the regulator. As a result, the preceding calculations for Cc and Rc are only valid if the ESR does not exceed the maximum value specified by the following equations.

$$ESR \leq \frac{0.01 \cdot 15V}{I_{RIPPLE(P-P)}} \quad \text{and} \quad \leq \frac{8.7 \cdot 10^{-3} \cdot V_{IN}}{I_{LOADmax}} \quad \text{where}$$

$$I_{RIPPLE(P-P)} = \frac{1.15 \cdot I_{LOADmax}}{1 - D_{max}}$$

Select a capacitor with an ESR, at 52kHz, that is less than or equal to the lower value calculated. Most electrolytic capacitors specify ESR at 120kHz which is 15% to 30% higher than at 52kHz. Also, note that ESR increases by a factor of 2 when operating at -20°C.

In general, low values of ESR are achieved by using large value capacitors ( $C \geq 470\mu F$ ), and capacitors with high WVDC, or by paralleling smaller value capacitors.

**APPLICATIONS INFORMATION (cont.)****4. Input Capacitor Selection (C<sub>IN</sub>)**

To reduce noise on the supply voltage caused by the switching action of a step-up regulator (ripple current noise), V<sub>IN</sub> should be bypassed to ground. A good quality 0.1μF capacitor with low ESR should provide sufficient decoupling. If the UC2577 is located far from the supply source filter capacitors, an additional electrolytic (47μF, for example) is required.

**Nichicon** - Types PF, PX, or PZ  
927 East StateParkway, Schaumburg, IL 60173  
(708)843-7500

**United Chemi-CON** - Types LX, SXF, or SXJ  
9801 West Higgins, Rosemont, IL 60018  
(708)696-2000

**Figure 6. Aluminum Electrolytic Capacitors Recommended for Switching Regulators**

**5. Output Diode Selection (D)**

In the step-up regulator, the switching diode must withstand a reverse voltage and be able to conduct the peak output current of the UC2577. Therefore a suitable diode must have a minimum reverse breakdown voltage greater than the circuit output voltage, and should also be rated for average and peak current greater than I<sub>LOADmax</sub> and I<sub>Dpk</sub>. Because of their low forward voltage drop (and thus higher regulator efficiencies), Schottky barrier diodes are often used in switching regulators. Refer to Figure 7 for recommended part numbers and voltage ratings of 1A and 3A diodes.

| V <sub>OUTmax</sub> | Schottky                    |                             | Fast Recovery             |                         |
|---------------------|-----------------------------|-----------------------------|---------------------------|-------------------------|
|                     | 1A                          | 3A                          | 1A                        | 3A                      |
| 20V                 | 1N5817<br>MBR120P           | 1N5820<br>MBR320P           |                           |                         |
| 30V                 | 1N5818<br>MBR130P<br>11DQ03 | 1N5821<br>MBR330P<br>31DQ03 |                           |                         |
| 40V                 | 1N5819<br>MBR140P<br>11DQ04 | 1N5822<br>MBR340P<br>31DQ04 |                           |                         |
| 50V                 | MBR150<br>11DQ05            | MBR350<br>31DQ05            | 1N4933<br>MUR105          |                         |
| 100V                |                             |                             | 1N4934<br>MUR110<br>10DL1 | MR851<br>30DL1<br>MR831 |

MBRxxx and MURxxx are manufactured by Motorola.  
1DDxxx, 11Cxx and 31Dxx are manufactured by  
International Rectifier

**Figure 7. Diode Selection Chart**

**ORDERING INFORMATION**

Unitrode Type Number

UC2577T-ADJ 5 Pin TO-220 Plastic Package

UC2577TD-ADJ 5 Pin TO-263 Plastic Package

## **IMPORTANT NOTICE**

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.