

Surface mount zener diode


BZT52B2V4S-BZT52B75S

FEATURES

- Wide zener voltage range selection: 2.4V to 51V
- VZ Tolerance selection of $\pm 2\%$ (B series)
- Ideally suited for automated assembly processes
- Moisture sensitivity level 1



Lead-free

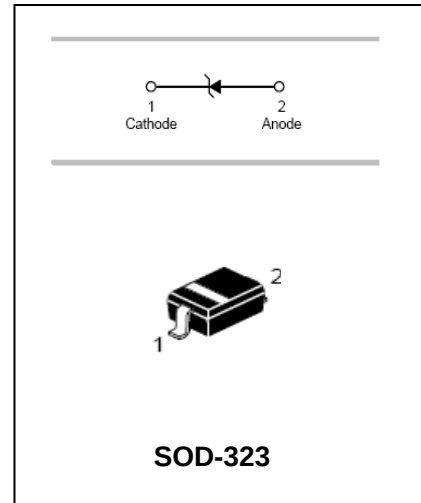

APPLICATIONS

- Zener diode
- Ultra-small surface mount package

ORDERING INFORMATION

Type No.	Marking	Package Code
BZT52B2V4S-BZT52B75S	See table 2	SOD-323

MAXIMUM RATING @ Ta=25°C unless otherwise specified

Characteristic	Symbol	Value	Unit
Forward Voltage @ $I_F=10\text{mA}$	V_F	0.9	V
Power Dissipation	P_d	200	mW
Thermal resistance, junction to ambient air	$R_{\theta JA}$	625	$^{\circ}\text{C}/\text{W}$
Junction temperature	T_j	150	$^{\circ}\text{C}$
Storage temperature range	T_{stg}	-65 to +150	$^{\circ}\text{C}$

Notes: These ratings are limiting values above which the serviceability of the diodes may be impaired.



Surface mount zener diode

BZT52B2V4S-BZT52B75S

ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified





Type Number	Marking Code	Zener Voltage Range				Maximum Zener Impedance			Maximum Reverse Current	
		V _Z @I _{ZT}			I _{ZT}	Z _{ZT} @I _{ZT}	I _{ZK}	Z _{ZK} @I _{ZK}	I _R	@V _R
		Nom(V)	Min(V)	Max(V)	mA	Ω	mA	Ω	μA	V
BZT52B2V4S	0Z	2.4	2.35	2.45	5	94	1	564	45	1
BZT52B2V7S	1Z	2.7	2.65	2.75	5	94	1	564	18	1
BZT52B3V0S	2Z	3.0	2.94	3.06	5	89	1	564	9	1
BZT52B3V3S	3Z	3.3	3.23	3.37	5	89	1	564	4.5	1
BZT52B3V6S	4Z	3.6	3.53	3.67	5	84	1	564	4.5	1
BZT52B3V9S	5Z	3.9	3.82	3.98	5	84	1	564	2.7	1
BZT52B4V3S	6Z	4.3	4.21	4.39	5	84	1	564	2.7	1
BZT52B4V7S	7Z	4.7	4.61	4.79	5	75	1	564	2.7	2
BZT52B5V1S	8Z	5.1	5.00	5.20	5	56	1	470	1.8	2
BZT52B5V6S	9Z	5.6	5.49	5.71	5	37	1	451	0.9	2
BZT52B6V2S	AZ	6.2	6.08	6.32	5	9	1	376	2.7	4
BZT52B6V8S	BZ	6.8	6.66	6.94	5	14	1	141	1.8	4
BZT52B7V5S	CZ	7.5	7.35	7.65	5	14	1	75	0.9	5
BZT52B8V2S	DZ	8.2	8.04	8.36	5	14	1	75	0.63	5
BZT52B9V1S	EZ	9.1	8.92	9.28	5	14	1	94	0.45	6
BZT52B10S	FZ	10	9.80	10.20	5	18	1	141	0.18	7
BZT52B11S	GZ	11	10.78	11.22	5	18	1	141	0.09	8
BZT52B12S	HZ	12	11.76	12.24	5	23	1	141	0.09	8
BZT52B13S	JZ	13	12.74	13.26	5	28	1	160	0.09	8
BZT52B15S	KZ	15	14.70	15.30	5	28	1	188	0.045	10.5
BZT52B16S	LZ	16	15.68	16.32	5	37	1	188	0.045	11.2
BZT52B18S	MZ	18	17.64	18.36	5	42	1	212	0.045	12.6
BZT52B20S	NZ	20	19.60	20.40	5	51	1	212	0.045	14.0
BZT52B22S	PZ	22	21.56	22.44	5	51	1	235	0.045	15.4
BZT52B24S	RZ	24	23.52	24.48	5	65	1	235	0.045	16.8
BZT52B27S	SZ	27	26.46	27.54	5	75	0.5	282	0.045	18.9
BZT52B30S	TZ	30	29.40	30.60	5	75	0.5	282	0.045	21.0
BZT52B33S	UZ	33	32.34	33.66	5	75	0.5	306	0.045	23.0
BZT52B36S	VZ	36	35.28	36.72	5	84	0.5	329	0.045	25.2
BZT52B39S	WZ	39	38.22	39.78	5	122	0.5	329	0.045	27.3
BZT52B43S	XZ	43	42.14	43.86	5	141	0.5	353	0.045	30.1
BZT52B47S	YZ	47	46.06	47.94	5	160	0.5	353	0.045	33.0
BZT52B51S	ZZ	51	49.98	52.02	5	169	0.5	376	0.045	35.7

Surface mount zener diode

BZT52B2V4S-BZT52B75S

Type Number	Marking Code	Zener Voltage Range				Maximum Zener Impedance			Maximum Reverse Current	
		$V_Z@I_{ZT}$			I_{ZT}	$Z_{ZT}@I_{ZT}$	I_{ZK}	$Z_{ZK}@I_{ZK}$	I_R	@ V_R
		Nom(V)	Min(V)	Max(V)	mA	Ω	mA	Ω	μA	V
BZT52B56S	X2•	56	54.88	57.12	2	200	0.5	400	0.045	39.2
BZT52B62S	X3•	62	60.76	63.24	2	215	0.5	423	0.045	43.4
BZT52B68S	X4•	68	66.64	69.36	2	240	0.5	447	0.045	47.6
BZT52B75S	X5•	75	73.5	76.5	2	255	0.5	470	0.045	52.5

TYPICAL CHARACTERISTICS @ $T_a=25^\circ C$ unless otherwise specified

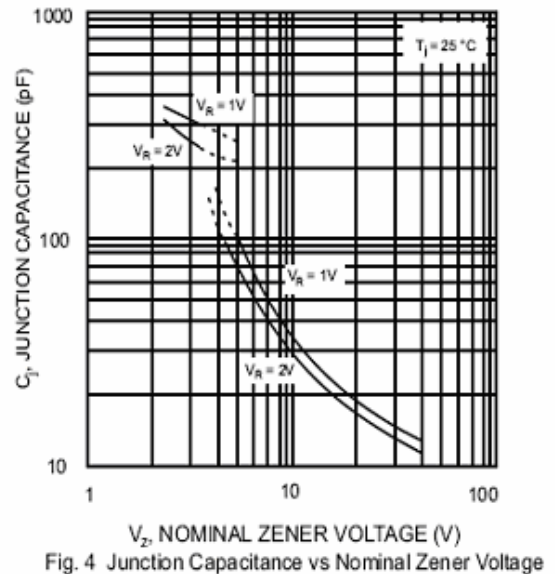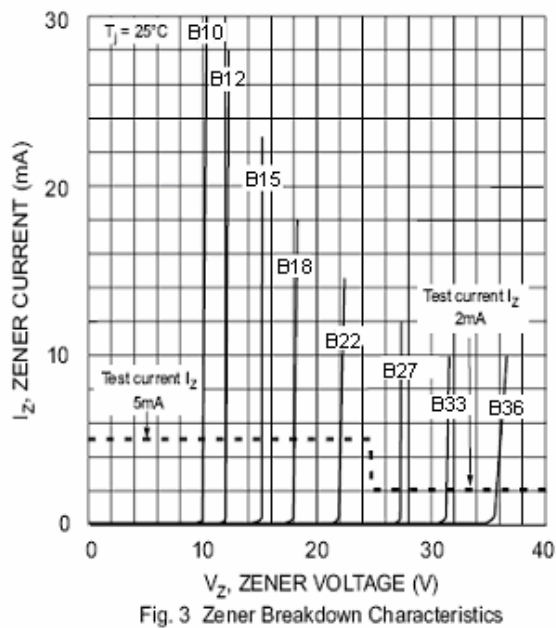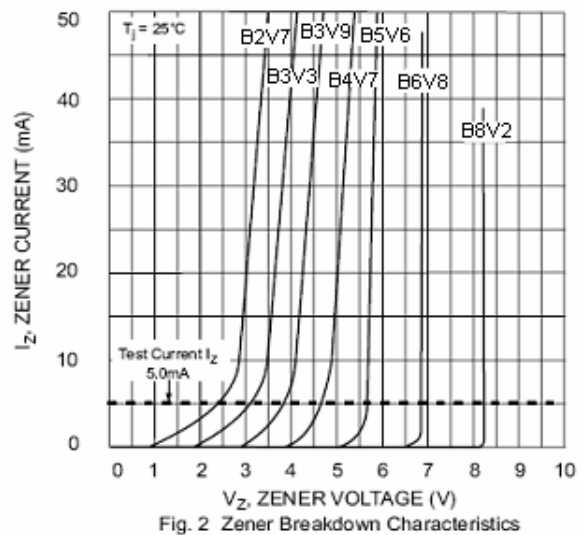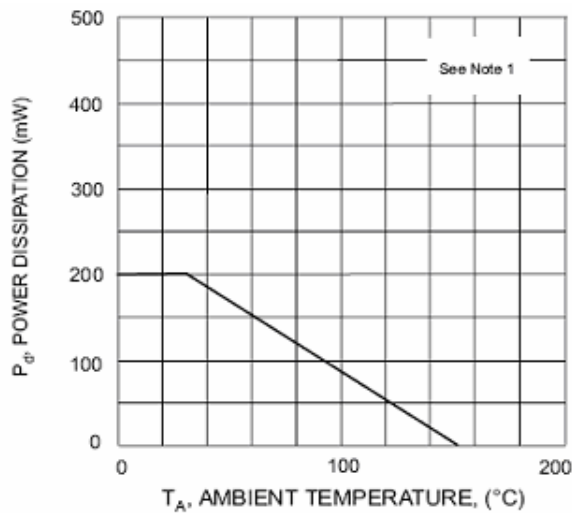


Surface mount zener diode

BZT52B2V4S-BZT52B75S


PACKAGE OUTLINE

Plastic surface mounted package

SOD-323

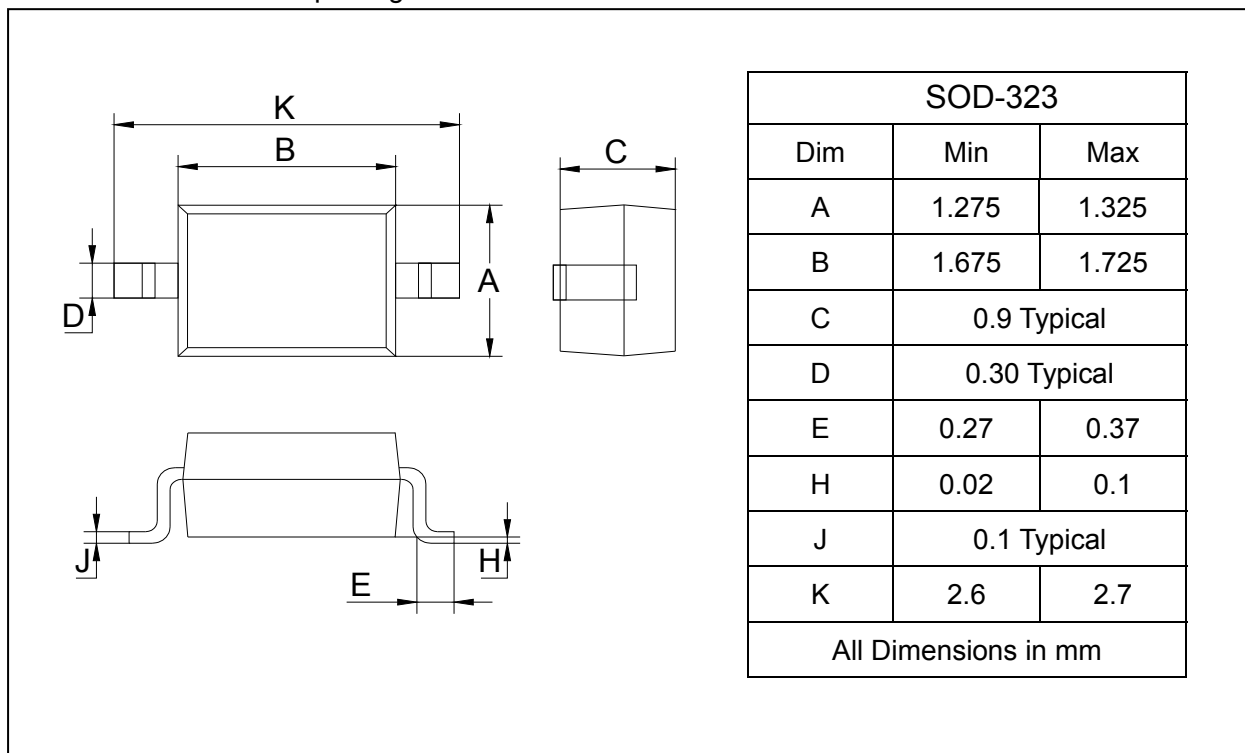

SOLDERING FOOTPRINT

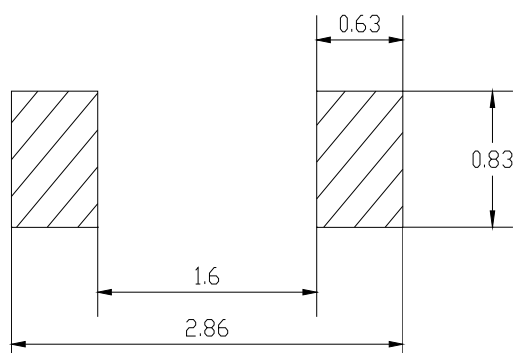

Unit : mm

PACKAGE INFORMATION

Device	Package	Shipping
BZT52B2V4S-BZT52B75S	SOD-323	3000/Tape&Reel