



Z80 CPU Central Process Unit

- The instruction set contains 158 instructions. The 78 instructions of the 8080A are included as a subset; 8080A and Z80* software compatibility is maintained.
- 8MHz, 6MHz, 4MHz and 2.5 MHz clocks for the Z80H, Z80B, Z80A and Z80 CPU result in rapid instruction execution with consequent high data throughput.
- The extensive instruction set includes string, bit, byte, and word operations. Block searches and block transfers together with indexed and relative addressing result in the most powerful data handling capabilities in the microcomputer industry.
- The Z80 microprocessors and associated family of peripheral controllers are linked by a vectored interrupt system. This

- system may be daisy-chained to allow implementation of a priority interrupt scheme. Little, if any, additional logic is required for daisy-chaining.
- Duplicate sets of both general-purpose and flag registers are provided, easing the design and operation of system software through single context switching, background-foreground programming, and single-level interrupt processing. In addition, two 16-bit index registers facilitate program processing of tables and arrays.
- There are three modes of high speed interrupt processing: 8080 similar, non-Z80 peripheral device, and Z80 Family peripheral with or without daisy chain.
- On-chip dynamic memory refresh counter.

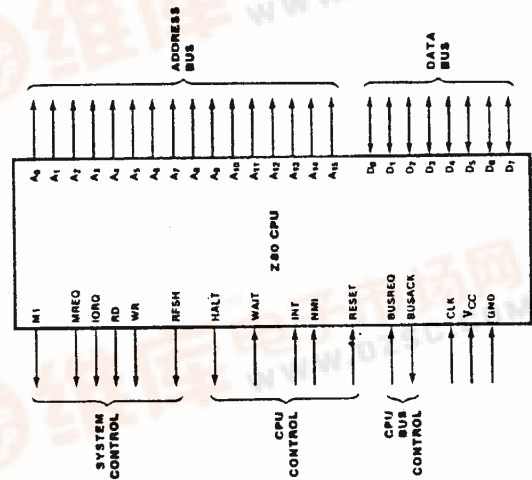


Figure 1. Logic Functions

General Description

The Z80, Z80A, Z80B and Z80H CPUs are third-generation single-chip microprocessors with exceptional computational power. They offer higher system throughput and more efficient memory utilization than comparable second- and third-generation microprocessors. The internal registers contain 208 bits of read/write memory that are accessible to the programmer. These registers include two sets of six general-purpose registers which may be used individually as either 8-bit registers or as 16-bit register pairs. In addition, there are two sets of accumulator and flag registers. A group of "exchange" instructions makes either set of main or alternate registers accessible to the programmer. The alternate set allows operation in foreground.

background mode or it may be reserved for very fast interrupt response.

The Z80 also contains a Stack Pointer, Program Counter, two index registers, a Refresh register (counter), and an interrupt register.

The CPU is easy to incorporate into a system since it requires only a single +5 V power source. All output signals are fully decoded and timed to control standard memory or peripheral circuits, and it is supported by an extensive family of peripheral controllers. The internal block diagram (Figure 3) shows the primary functions of the Z80 processors. Subsequent text provides more detail on the Z80 I/O controller family, registers, instruction set, interrupts and daisy chaining, and CPU timing.

78-1862
766464

General Description (Continued)

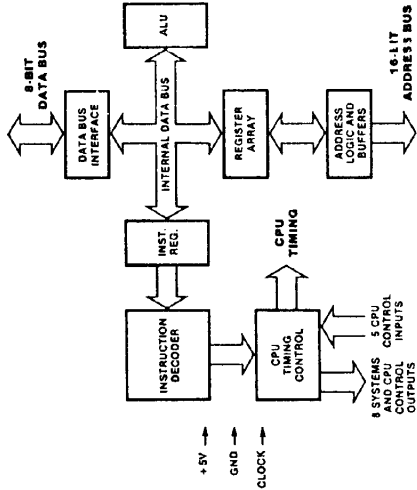


Figure 3. CPU Block Diagram

Z80 Microprocessor Family

The Z80, Z80A, Z80B and Z80H microprocessor is the central element of a comprehensive microprocessor product family. This family works together in most applications with minimum requirements for additional logic, facilitating the design of efficient and cost-effective microcomputer-base systems.

Five components to provide extensive support for the Z80 microprocessor. These are:

- The CTC (Counter/Timer Circuit) features four programmable 8-bit counter/timers, each of which has an 8-bit prescaler. Each of the four channels may be configured to operate in either counter or timer mode.
- The PIO (Parallel Input/Output) operates in both data-byte I/O transfer mode (with handshaking) and in bit mode (without handshaking). The PIO may be

configured to interface with standard parallel peripheral devices such as printers, tape punches, and keyboards.

- The DMA (Direct Memory Access) controller provides dual port data transfer operations and the ability to terminate data transfer as a result of a pattern match.
- The SIO (Serial Input/Output) controller offers two channels. It is capable of operating in a variety of programmable modes for both synchronous and asynchronous communication, including Bi-Synch and SDLC.
- The DART (Dual Asynchronous Receiver/Transmitter) device provides low cost asynchronous serial communication. It has two channels and a full modem control interface.

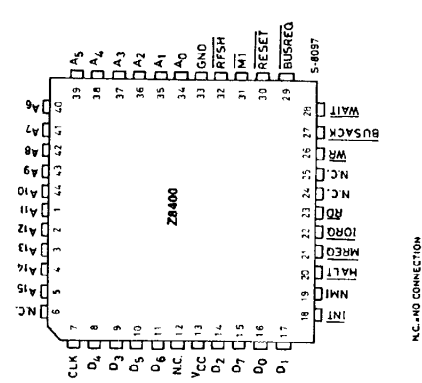


Figure 2a. Chip Carrier Pin Configuration

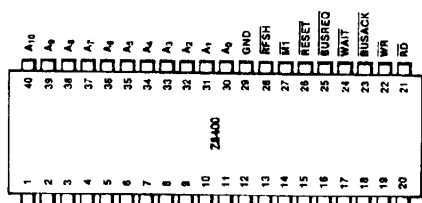


Figure 2. Pin Configuration

Z80 CPU Registers

Figure 4 shows three groups of registers within the Z80 CPU. The first group consists of duplicate sets of 8-bit registers: a principal set and an alternate set (designated by ' [prime], e.g., A'). Both sets consist of the Accumulator Register, the Flag Register, and six general-purpose registers. Transfer of data between these duplicate sets of registers is accomplished by use of "Exchange" instructions. The result is faster response to interrupts and easy, efficient implementation of such versatile programming techniques as background-

foreground data processing. The second set of registers consists of six registers with assigned functions. These are the I (Interrupt Register), the R (Refresh Register), the IX and IY (Index Registers), the SP (Stack Pointer), and the PC (Program Counter). The third group consists of two interrupt status flip-flops, plus an additional pair of flip-flops which assists in identifying the interrupt mode at any particular time. Table 1 provides further information on these registers.

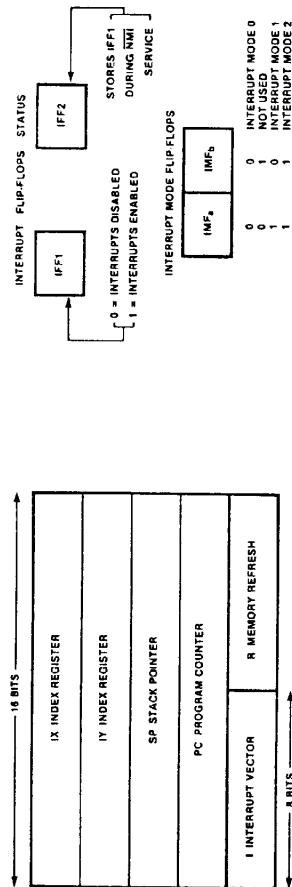
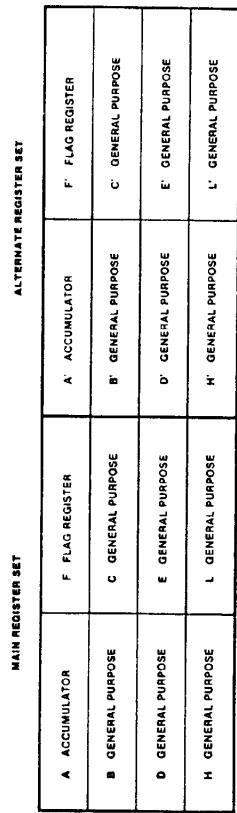


Fig. 4. CPU Registers

CPU Registers (Continued)

Register	Size (Bits)	Remarks
A, A'	8	Stores an operand or the results of an operation
F, F'	8	See Instruction Set.
B, B'	8	Can be used separately or as a 16-bit register with C
C, C'	8	See B, above.
D, D'	8	Can be used separately or as a 16-bit register with E.
E, E'	8	See D, above
H, H'	8	Can be used separately or as a 16-bit register with L.
L, L'	8	See H, above.
Note: The (B,C), (D,E), and (H,L) sets are combined as follows: B-High byte C-Low byte D-High byte E-Low byte H-High byte L-Low byte		
I	8	Stores upper eight bits of memory address for vectored interrupt processing.
R	8	Provides user-transparent dynamic memory refresh. Lower seven bits are automatically incremented and all eight are placed on the address bus during each instruction fetch cycle refresh time.
IX	16	Used for indexed addressing.
IY	16	Same as IX, above.
SP	16	Holds address of the top of the stack. See Push or Pop in instruction set.
PC	16	Holds address of next instruction.
IFF ₁ -IFF ₂	Flip-Flops	Set or reset to indicate interrupt status (see Figure 4).
IMFa-IMFb	Flip-Flops	Reflect Interrupt mode (see Figure 4).

Table 1. CPU Registers

Interrupts: General Operation

The CPU accepts two interrupt input signals: $\overline{\text{NMI}}$ and $\overline{\text{INT}}$. The $\overline{\text{NMI}}$ is a non-maskable interrupt and has the highest priority. $\overline{\text{INT}}$ is a lower priority interrupt and it requires that interrupts be enabled in software in order to operate. $\overline{\text{INT}}$ can be connected to multiple peripheral devices in a wired-OR configuration.

The Z80 has a single response mode for interrupt service for the non-maskable interrupt. The maskable interrupt, $\overline{\text{INT}}$, has three programmable response modes available.

- These are:
- Mode 0 — similar with the 8080 microprocessor.
 - Mode 1 — Peripheral Interrupt service, for use with non-8080/Z80 systems.
 - Mode 2 — a vectored interrupt scheme, usually daisy-chained, for use with Z80 family and compatible peripheral devices.

The CPU services interrupts by sampling the $\overline{\text{NMI}}$ and $\overline{\text{INT}}$ signals at the rising edge of the last clock of an instruction. Further interrupt service processing depends upon the type of interrupt that was detected. Details on interrupt responses are shown in the CPU Timing Section.

Non-Maskable Interrupt ($\overline{\text{NMI}}$). The non-maskable interrupt cannot be disabled by program control and therefore will be accepted at all times by the CPU. $\overline{\text{NMI}}$ is usually reserved for servicing only the highest priority type interrupts, such as that for orderly shut-down after power failure has been detected.

After recognition of the $\overline{\text{NMI}}$ signal (providing BUSREQ is not active), the CPU jumps to restart location 0066H. Normally, software starting at this address contains the interrupt service routine.

Maskable Interrupt ($\overline{\text{INT}}$). Regardless of the interrupt mode set by the user, the Z80 response to a maskable interrupt input follows a common timing cycle. After the interrupt has been detected by the CPU (provided that interrupts are enabled and BUSREQ is not active) a special interrupt

processing cycle begins. This is a special fetch ($\overline{\text{MI}}$) cycle in which $\overline{\text{IORQ}}$ becomes active rather than $\overline{\text{MREQ}}$, as in normal $\overline{\text{MI}}$ cycle. In addition, this special $\overline{\text{MI}}$ cycle is automatically extended by two $\overline{\text{WAIT}}$ states, to allow for the time required to acknowledge the interrupt request.

Mode 0 Interrupt Operation. This mode is similar to the 8080 microprocessor interrupt service procedures. The interrupting device places an instruction on the data bus. This is normally a Restart Instruction, which will initiate a call to the selected one of eight restart locations in page zero of memory. Unlike the 8080, the Z80 CPU responds to the Call instruction with only one interrupt acknowledge cycle followed by two memory read cycles.

Mode 1 Interrupt Operation. Mode 1 operation is very similar to that for the $\overline{\text{NMI}}$. The principal difference is that the Mode 1 interrupt has a restart location of 0038H only.

Mode 2 Interrupt Operation. This interrupt mode has been designed to utilize most effectively the capabilities of the Z80 microprocessor and its associated peripheral family. The interrupting peripheral device selects the starting address of the interrupt service routine. It does this by placing an 8-bit vector on the data bus during the interrupt acknowledge cycle. The CPU forms a pointer using this byte as the lower 8-bits and the contents of the I register as the upper 8-bits. This points to an entry in a table of addresses for interrupt service routines. The CPU then jumps to the routine at that address. This flexibility in selecting the interrupt service routine address allows the peripheral device to use several different types of service routines. These routines may be located at any available location in memory. Since the interrupting device supplies the low-order byte of the 2-byte vector, bit 0 (A_0) must be a zero.

Interrupt Priority (Daisy Chaining and Nested Interrupts). The interrupt priority of each peripheral device is determined by its physical location within a daisy-chain

Interrupts: General Operation (Continued)

configuration. Each device in the chain has an interrupt enable input line ($\overline{\text{IEI}}$) and an interrupt enable output line ($\overline{\text{IEO}}$), which is tied to the next lower priority device. The first device in the daisy chain has its $\overline{\text{IEI}}$ input hardwired to a High level. The first device has highest priority, while each succeeding device has a corresponding lower priority. This arrangement permits the CPU to select the highest priority interrupt from several simultaneously interrupting peripherals.

The interrupting device disables its $\overline{\text{IEO}}$ line to the next lower priority peripheral until it has been serviced. After servicing, its $\overline{\text{IEO}}$ line is raised, allowing lower priority peripherals to demand interrupt servicing.

The Z80 CPU will nest (queue) any pending interrupts or interrupts received while a selected peripheral is being serviced.

Interrupt Enable/Disable Operation. Two flip-flops, IFF_1 and IFF_2 , referred to in the register description are used to signal the

CPU interrupt status. Operation of the two flip-flops is described in Table 2. For more details, refer to the Z80 CPU Technical Manual.

Action	IFF_2	IFF_1	Comments
CPU Reset	0	0	Maskable interrupt $\overline{\text{INT}}$ disabled
DI instruction execution	0	0	Maskable interrupt $\overline{\text{INT}}$ disabled
EI instruction execution	1	1	Maskable interrupt $\overline{\text{INT}}$ enabled
LD A, I instruction execution	•	•	$\text{IFF}_2 \rightarrow \text{Parity flag}$
LD A, R instruction execution	•	•	$\text{IFF}_2 \rightarrow \text{Parity flag}$
Accept $\overline{\text{NMI}}$	0	IFF_1	$\text{IFF}_1 \rightarrow \text{IFF}_2$ (Maskable interrupt $\overline{\text{INT}}$ disabled)
RETN instruction execution	IFF_2	•	$\text{IFF}_2 \rightarrow \text{IFF}_1$ at completion of an $\overline{\text{NMI}}$ service routine.

Table 2. State of Flip-Flops



Z8400



Z8400

Instruction Set

The Z80 microprocessor has one of the most powerful and versatile instruction sets available in any 8-bit microprocessor. It includes such unique operations as a block move for fast, efficient data transfers within memory or between memory and I/O. It also allows operations on any bit in any location in memory.

The following is a summary of the Z80 instruction set and shows the assembly language mnemonic, the operation, the flag status, and gives comments on each instruction. The *Z80 CPU Technical Manual* and *Z80 CPU Programming Manual* contain significantly more details for programming use.

The instructions are divided into the following categories:

- 8-bit loads
- 16-bit loads
- Exchanges, block transfers, and searches
- 8-bit arithmetic and logic operations
- General-purpose arithmetic and CPU control

- 16-bit arithmetic operations
- Rotates and shift
- Bit set, reset, and test operations
- Jumps
- Calls, returns, and restarts
- Input and output operations

A variety of addressing modes are implemented to permit efficient and fast data transfer between various registers, memory locations, and input/output devices. These addressing modes include:

- Immediate
- Immediate extended
- Modified page zero
- Relative
- Extended
- Indexed
- Register
- Register indirect
- Implied
- Bit

8-Bit Load Group

Mnemonic	Symbolic Operation	S	Z	H	Flags	P/V	M	C	Opcode	Hex	No. of Bytes	No. of M Cycles	No. of T States	Comments
									78 543 210					
LD r, r'	r - r'	.	.	X	X	.	.	.	01 r' r'		1	1	4	r', Reg.
LD r, n	r - n	.	.	X	X	.	.	.	00 r' 110		2	2	7	000 B
LD r, (HL)	r - (HL)	.	.	X	X	.	.	.	01 r' 110		1	2	7	010 D
LD r, (X+d)	r - (X+d)	.	.	X	X	.	.	.	11 011 101	DD	3	5	19	011 E
									01 r' 101					100 H
LD r, (Y+d)	r - (Y+d)	.	.	X	X	.	.	.	11 111 101	FD	3	5	19	101 L
									01 r' 110					111 A
LD (HL), r	(HL) - r	.	.	X	X	.	.	.	01 110 r		1	2	7	
LD (X+d), r	(X+d) - r	.	.	X	X	.	.	.	11 011 101	DD	3	5	19	
									01 110 r					
LD (Y+d), r	(Y+d) - r	.	.	X	X	.	.	.	11 111 101	FD	3	5	19	
									01 110 r					
LD (HL), n	(HL) - n	.	.	X	X	.	.	.	00 110 110	36	2	3	10	
LD (X+d), n	(X+d) - n	.	.	X	X	.	.	.	11 011 101	DD	4	5	19	
									00 110 110	36				
LD (Y+d), n	(Y+d) - n	.	.	X	X	.	.	.	11 111 101	FD	4	5	19	
									00 110 110	36				
LD A, (BC)	A - (BC)	.	.	X	X	.	.	.	00 001 010	0A	1	2	7	
LD A, (DE)	A - (DE)	.	.	X	X	.	.	.	00 011 010	1A	1	2	7	
LD A, (HI)	A - (HI)	.	.	X	X	.	.	.	00 111 010	3A	3	4	13	
									00 000 010	02	1	2	7	
LD (BC), A	(BC) - A	.	.	X	X	.	.	.	00 010 010	12	1	2	7	
LD (DE), A	(DE) - A	.	.	X	X	.	.	.	00 110 010	32	3	4	13	
LD (HI), A	(HI) - A	.	.	X	X	.	.	.	00 001 010	0A	2	2	9	
									01 010 111	57				
LD A, R	A - R	1	1	X	0	X	IFF	0	11 101 101	ED	2	2	9	
LD I, A	I - A	.	.	X	X	.	.	.	01 011 111	5F	2	2	9	
LD R, A	R - A	.	.	X	X	.	.	.	01 000 111	47	2	2	9	
									11 101 101	ED	2	2	9	
									01 001 111	4F				

NOTES: r, r' means any of the registers A, B, C, D, E, H, L.
 IFF the content of the interrupt enable flip-flop. (IEP) is
 high, interrupt is pending.
 For an explanation of the flags, positions, and symbols for
 mnemonic tables, see Symbolic Notation section
 following tables.



Z8400

Z8400

16-Bit Load Group

Mnemonic	Symbolic Operation	S	Z	Flags	P/V	M	C	7#	5#	3#	2#	1#	0#	No. of M. Bytes	No. of M. Cycles	No. of M. States	Comments
LD dd, nn	dd ← nn	.	.	X	.	.	.	00	dd0	001	.	.	.	3	10	10	dd BC
LD IX, nn	IX ← nn	.	.	X	.	.	.	01	101	DD	.	.	.	4	4	14	01 DE HL SP
LD IY, nn	IY ← nn	.	.	X	.	.	.	00	100	001	21	.	.	4	4	14	11 SP
LD HL, (nn)	H ← (nn+1) L ← (nn)	.	.	X	.	.	.	00	101	010	2A	.	.	3	5	16	
LD dd, (nn)	dd ← (nn+1) dd ← (nn)	.	.	X	.	.	.	11	101	101	ED	.	.	4	6	20	01 dd1 011
LD IX, (nn)	IX ← (nn+1) IX ← (nn)	.	.	X	.	.	.	11	011	101	DD	.	.	4	6	20	
LD IY, (nn)	IY ← (nn+1) IY ← (nn)	.	.	X	.	.	.	11	111	101	FD	.	.	4	6	20	
D (nn), HL	(nn+1) ← H (nn) ← L	.	.	X	.	.	.	00	100	010	2A	.	.	3	5	16	
D (nn), dd	(nn+1) ← ddH (nn) ← ddL	.	.	X	.	.	.	11	101	101	ED	.	.	4	6	20	
D (nn), IX	(nn+1) ← IXH (nn) ← IXL	.	.	X	.	.	.	11	011	101	DD	.	.	4	6	20	
D (nn), IY	(nn+1) ← IYH (nn) ← IYL	.	.	X	.	.	.	00	100	010	22	.	.	4	6	20	
D SP, HL	SP ← HL	.	.	X	.	.	.	11	111	001	F9	.	.	1	1	6	
D SP, IX	SP ← IX	.	.	X	.	.	.	11	011	101	DD	.	.	2	2	10	
D SP, IY	SP ← IY	.	.	X	.	.	.	11	111	001	F9	.	.	2	2	10	
JSH qq	(SP-2) ← qqH (SP-1) ← qqH SP ← SP-2	.	.	X	.	.	.	11	011	101	DD	.	.	2	4	15	qq BC
JSH IX	(SP-2) ← IXL (SP-1) ← IXH SP ← SP-2	.	.	X	.	.	.	11	100	101	ES	.	.	2	4	15	01 DE HL AF
JSH IY	(SP-2) ← IYL (SP-1) ← IYH SP ← SP-2	.	.	X	.	.	.	11	111	001	F9	.	.	1	3	11	
JP qq	qq ← (SP+1) qq ← (SP) SP ← SP+2	.	.	X	.	.	.	11	011	101	DD	.	.	2	4	15	
JP IX	IX ← (SP+1) IX ← (SP) SP ← SP+2	.	.	X	.	.	.	11	100	001	E1	.	.	2	4	14	
JP IY	IY ← (SP+1) IY ← (SP) SP ← SP+2	.	.	X	.	.	.	11	111	101	FD	.	.	2	4	14	

NOTES: dd = any of the register pairs BC, DE, HL, SP, or (PAIR); qq = any of the register pairs BC, DE, HL, SP, or (PAIR); (PAIR) refers to high order and low order eight bits of the register pair respectively.
e.g., BCL = C, AFH = A.

Exchange, Block Transfer, Block Search Groups

Mnemonic	Symbolic Operation	S	Z	Flags	P/V	M	C	7#	5#	3#	2#	1#	0#	No. of M. Bytes	No. of M. Cycles	No. of M. States	Comments
EX DE, HL EX AF, AF EXX	DE ← HL AF ← AF BC ← BC DE ← DE HL ← HL L ← (SP)	.	.	X	.	.	.	11	101	011	EB	.	.	1	1	4	00 001 000 08
EX (SP), HL	H ← (SP+1) L ← (SP)	.	.	X	.	.	.	11	100	011	E3	.	.	1	5	19	
EX (SP), IX	IX ← (SP+1) IX ← (SP)	.	.	X	.	.	.	11	011	101	DD	.	.	2	6	23	
EX (SP), IY	IY ← (SP+1) IY ← (SP)	.	.	X	.	.	.	11	111	101	FD	.	.	2	6	23	
LDI	(DE) ← (HL) DE ← DE+1 HL ← HL+1 BC ← BC-1	.	.	X	.	.	.	11	101	101	ED	.	.	2	4	16	10 100 000 A0
LDR	(DE) ← (HL) DE ← DE+1 HL ← HL+1 BC ← BC-1 Repeat until BC = 0	.	.	X	.	.	.	11	101	101	ED	.	.	2	5	21	10 110 000 B0
LDD	(DE) ← (HL) DE ← DE-1 HL ← HL-1 BC ← BC-1	.	.	X	.	.	.	11	101	101	ED	.	.	2	4	16	10 101 000 A8
LDDR	(DE) ← (HL) DE ← DE-1 HL ← HL-1 BC ← BC-1 Repeat until BC = 0	.	.	X	.	.	.	11	101	101	ED	.	.	2	5	21	10 111 000 B8
CPI	A ← (HL) HL ← HL+1 HL ← HL-1 BC ← BC-1	.	.	X	.	.	.	11	101	101	ED	.	.	2	4	16	10 100 001 A1
CPRI	A ← (HL) HL ← HL+1 HL ← HL-1 BC ← BC-1 Repeat until BC = 0	.	.	X	.	.	.	11	101	101	ED	.	.	2	5	21	10 110 001 B1
CPD	A ← (HL) HL ← HL-1 HL ← HL-1 BC ← BC-1	.	.	X	.	.	.	11	101	101	ED	.	.	2	4	16	10 101 001 A9
CPDR	A ← (HL) HL ← HL-1 HL ← HL-1 BC ← BC-1 Repeat until BC = 0	.	.	X	.	.	.	11	101	101	ED	.	.	2	5	21	10 111 001 B9

NOTES: ① If the result of B-1 is zero the Z flag is set, otherwise it is reset.
② Z flag is set upon instruction completion only.



8-Bit Arithmetic and Logical Group

Mnemonic	Symbolic Operation	S	Z	H	P	V	N	C	Opcode 78 540 210 Hex	No. of Bytes	No. of Cycles	No. of States	Comments	
ADD A, r	A ← A + r	1	1	X	1	X	V	0	1	10 000 r	1	1	4	r, Reg.
ADD A, n	A ← A + n	1	1	X	1	X	V	0	1	11 000 110	2	2	7	001 C 010 D 011 E
ADD A, (HL)	A ← A + (HL)	1	1	X	1	X	V	0	1	10 000 110	1	2	7	
ADD A, (IX+d)	A ← A + (IX+d)	1	1	X	1	X	V	0	1	11 011 101 DD	3	5	19	100 H 101 L 111 A
ADD A, (IY+d)	A ← A + (IY+d)	1	1	X	1	X	V	0	1	11 111 101 FD	3	5	19	
ADC A, s	A ← A + s + CY	1	1	X	1	X	V	0	1	10 000 110	1	1	4	s is any of r, n, (HL), (IX+d), (IY+d) as shown.
SUB s	A ← A - s	1	1	X	1	X	V	1	1	010	1	1	4	for ADD instruction, replace the 000 in the ADD set above.
SBC A, s	A ← A - s - CY	1	1	X	1	X	V	1	1	011	1	1	4	
AND s	A ← A & s	1	1	X	1	X	P	0	0	100	1	1	4	
OR s	A ← A s	1	1	X	1	X	P	0	0	101	1	1	4	
XOR s	A ← A ⊕ s	1	1	X	1	X	P	0	0	110	1	1	4	
CP s	A ← s	1	1	X	1	X	V	1	1	111	1	1	4	
INC r	r ← r + 1	1	1	X	1	X	V	0	0	00 r 000	1	1	4	
INC (HL)	(HL) ← (HL) + 1	1	1	X	1	X	V	0	0	00 110 000	1	3	11	
INC (IX+d)	(IX+d) ← (IX+d) + 1	1	1	X	1	X	V	0	0	11 011 101 DD	3	6	23	
INC (IY+d)	(IY+d) ← (IY+d) + 1	1	1	X	1	X	V	0	0	11 111 101 FD	3	6	23	
DEC m	m ← m - 1	1	1	X	1	X	V	1	0	00 110 000	1	1	4	

m is any of r, (HL), (IX+d), (IY+d) as shown for INC. DEC same format and status as INC. Replace 000 with 101 in opcodes.

General-Purpose Arithmetic and CPU Control Groups

Mnemonic	Symbolic Operation	S	Z	H	P	V	N	C	Opcode 78 540 210 Hex	No. of Bytes	No. of Cycles	No. of States	Comments	
DAA	Converts acc. content into packed BCD following add or subtract with packed BCD operands.	1	1	X	1	X	P	0	1	00 100 111 Z7	1	1	4	Decimal adjust accumulator.
CPL	A ← \bar{A}	0	0	X	1	X	0	0	1	00 101 111 2F	1	1	4	Complement accumulator (one's complement). Negate acc. (two's complement). Complement carry flag.
NEG	A ← 0 - A	1	1	X	1	X	V	1	1	11 101 101 ED	2	2	8	
CCF	CY ← \bar{CY}	0	0	X	X	X	0	0	1	00 111 111 3F	1	1	4	
SCF	CY ← 1	0	0	X	0	X	0	1	1	00 110 111 37	1	1	4	
NOP	No operation	0	0	X	0	X	0	0	1	00 000 000 00	1	1	4	
HALT	CPU halted	0	0	X	0	X	0	0	1	01 110 110 76	1	1	4	
DI*	IFF ← 0	0	0	X	0	X	0	0	1	11 110 011 F3	1	1	4	
E*	IFF ← 1	0	0	X	0	X	0	0	1	11 111 011 FB	1	1	4	
IMJ	Set interrupt mode 0	0	0	X	0	X	0	0	1	11 101 101 ED	2	2	8	
IMI	Set interrupt mode 1	0	0	X	0	X	0	0	1	01 010 110 56	2	2	8	
IMI2	Set interrupt mode 2	0	0	X	0	X	0	0	1	11 101 101 ED	2	2	8	

NOTES: IFF indicates the interrupt enable flip-flop.
CY indicates the carry flip-flop.
* indicates interrupts are not sampled at the end of EI or DI.

16-Bit Arithmetic Group

ADD HL, ss	HL ← HL + ss	0	0	X	X	X	0	1	00 ss1 001	1	3	11	ss: Reg. 00 BC 01 DE 10 HL 11 SP	
ADC HL, ss	HL ← HL + ss + CY	1	1	X	X	X	V	0	1	11 101 101 ED 01 ss1 010	2	4	15	
SBC HL, ss	HL ← HL - ss - CY	1	1	X	X	X	V	1	1	11 101 101 ED 01 ss0 010	2	4	15	
ADD IX, pp	IX ← IX + pp	0	0	X	X	X	0	1	01 pp1 001	1	4	15	pp: Reg. 00 BC 01 DE 10 IX 11 SP	
ADD IY, rr	IY ← IY + rr	0	0	X	X	X	0	1	11 111 101 FD 00 rr1 001	2	4	15		
INC ss	ss ← ss + 1	0	0	X	0	X	0	0	00 ss0 011	1	1	6		
INC IX	IX ← IX + 1	0	0	X	0	X	0	0	11 101 101 DD 00 100 011 23	2	2	10		
INC IY	IY ← IY + 1	0	0	X	0	X	0	0	11 111 101 FD 00 100 011 23	2	2	10		
DEC ss	ss ← ss - 1	0	0	X	0	X	0	0	00 ss1 011	1	1	6		
DEC IX	IX ← IX - 1	0	0	X	0	X	0	0	11 011 101 DD 00 101 011 2B	2	2	10		
DEC IY	IY ← IY - 1	0	0	X	0	X	0	0	11 111 101 FD 00 101 011 2B	2	2	10		

NOTES: ss is any of the register pairs BC, DE, HL, SP.
pp is any of the register pairs BC, DE, IX, SP.
rr is any of the register pairs BC, DE, IY, SP.



Rotate and Shift Group

Mnemonic	Symbolic Operation	Flags S Z H P/V N C	Opcode 78 543 210 Hex	No. of Bytes	No. of Cycles	No. of States	Comments
RLCA		• • X 0 X • 0 • 0 • 1	00 000 111 07	1	1	4	Rotate left circular accumulator.
RLA		• • X 0 X • 0 • 0 • 1	00 010 111 17	1	1	4	Rotate left accumulator.
RRCA		• • X 0 X • 0 • 0 • 1	00 001 111 0F	1	1	4	Rotate right circular accumulator.
RRA		• • X 0 X • 0 • 0 • 1	00 011 111 1F	1	1	4	Rotate right accumulator.
RLC r		1 1 X 0 X P 0 1	11 001 011 CB	2	2	8	Rotate left circular register r.
RLC (HL)		1 1 X 0 X P 0 1	00 000 110	2	4	15	Rotate left circular register r.
RLC (IX+d)		1 1 X 0 X P 0 1	11 011 101 DD - d - 00 000 110	4	6	23	Rotate left circular register r.
RLC (Y+d)		1 1 X 0 X P 0 1	11 111 101 FD - d - 00 000 110	4	6	23	Rotate left circular register r.
RL m		1 1 X 0 X P 0 1	00 000 110	1	1	4	Rotate left circular register m.
RRC m		1 1 X 0 X P 0 1	00 001 110	1	1	4	Rotate right circular register m.
RR m		1 1 X 0 X P 0 1	00 011 110	1	1	4	Rotate right circular register m.
SLA m		1 1 X 0 X P 0 1	00 000 110	1	1	4	Shift left arithmetic register m.
SRA m		1 1 X 0 X P 0 1	00 001 110	1	1	4	Shift right arithmetic register m.
SRL m		1 1 X 0 X P 0 1	00 011 110	1	1	4	Shift right logical register m.
RLD		1 1 X 0 X P 0 •	11 101 101 ED 01 101 111 6F	2	5	18	Rotate digit left and right: between the accumulator and location (HL). The content of the upper half of the accumulator is unaffected.
RRD		1 1 X 0 X P 0 •	11 101 101 ED 01 100 111 67	2	5	18	Rotate digit left and right: between the accumulator and location (HL). The content of the upper half of the accumulator is unaffected.

Instruction format and states are as shown for RLC's. To form new opcodes replace (HL) or RLC's with shown code.

Bit Set, Reset and Test Group

Mnemonic	Symbolic Operation	Flags S Z H P/V N C	Opcode 78 543 210 Hex	No. of Bytes	No. of Cycles	No. of States	Comments
BIT b, r	Z = r _b	X 1 X 1 X X 0 •	11 001 011 CB 01 b r	2	2	8	Test bit b of register r.
BIT b, (HL)	Z = (HL) _b	X 1 X 1 X X 0 •	11 001 011 CB 01 b 110	2	3	12	Test bit b of HL register.
BIT b, (IX+d)	Z = ((IX+d)) _b	X 1 X 1 X X 0 •	11 011 101 DD - d - 01 b 110	4	5	20	Test bit b of IX register.
BIT b, (Y+d)	Z = ((Y+d)) _b	X 1 X 1 X X 0 •	11 111 101 FD - d - 01 b 110	4	5	20	Test bit b of Y register.
SET b, r	r _b = 1	• • X • X • • •	11 001 011 CB 01 b r	2	2	8	Set bit b of register r.
SET b, (HL)	(HL) _b = 1	• • X • X • • •	11 001 011 CB 01 b 110	2	4	15	Set bit b of HL register.
SET b, (IX+d)	((IX+d)) _b = 1	• • X • X • • •	11 011 101 DD - d - 01 b 110	4	6	23	Set bit b of IX register.
SET b, (Y+d)	((Y+d)) _b = 1	• • X • X • • •	11 111 101 FD - d - 01 b 110	4	6	23	Set bit b of Y register.
RES b, m	m _b = 0	• • X • X • • •	11 001 011 CB 01 b 110	1	1	4	Reset bit b of register m.
Jump Group		• • X • X • • •	11 000 011 CB - n - - n - 11 cc 010 - n - - n -	3	3	10	Jump instructions.
JP nn	PC = nn	• • X • X • • •	11 000 011 CB - n - - n -	3	3	10	Jump to nn.
JP cc, nn	If condition cc is true PC = nn, otherwise continue	• • X • X • • •	11 cc 010 - n - - n -	3	3	10	Jump to nn if condition cc is true.
JR e	PC = PC + e	• • X • X • • •	00 011 000 18 - e-2 - - e-2 -	2	3	12	Jump register indirect.
JR C, e	If C = 0, continue	• • X • X • • •	00 111 000 38 - e-2 - - e-2 -	2	2	7	Jump register indirect if carry flag is clear.
JR NC, e	If C = 1, continue	• • X • X • • •	00 110 000 30 - e-2 - - e-2 -	2	2	7	Jump register indirect if carry flag is not set.
JR Z, e	If Z = 0, continue	• • X • X • • •	00 101 000 28 - e-2 - - e-2 -	2	2	7	Jump register indirect if zero flag is clear.
JR NZ, e	If Z = 1, continue	• • X • X • • •	00 100 000 20 - e-2 - - e-2 -	2	2	7	Jump register indirect if zero flag is set.

NOTES: The notation m_b indicates bit b (0 to 7) or location m.

To form new opcodes replace (HL) or RLC's with shown code.

Jump Group

Condition: 000 NZ non-zero, 001 Z zero, 010 NC non-carry, 011 C carry, 100 PE parity odd, 101 PE parity even, 110 P sign positive, 111 M sign negative.



Jump Group (Continued)

Mnemonic	Symbolic Operation	S	Z	Flags H	P/V	N	C	Opcode 76 543 210 Hex	No. of Bytes	No. of M Cycles	No. of T States	Comments
JP (HL)	PC ← PC + e PC ← HL	•	•	X	•	•	•	11 101 001 E9	1	1	4	If condition is met.
JP (IX)	PC ← IX	•	•	X	•	•	•	11 011 101 DD	2	2	8	
JP (IY)	PC ← IY	•	•	X	•	•	•	11 111 101 FD	2	2	8	
DJNZ, e	B ← B - 1 If B = 0, continue. If B ≠ 0, PC ← PC + e	•	•	X	•	•	•	00 010 000 10 - e-2 -	2	2	8	If B = 0.
									2	3	13	If B ≠ 0.

NOTES: e represents the extension in the relative addressing mode.
 • is a signed two's complement number in the range -128..128.
 •-2 in the opcode provides an effective address of PC+e at PC is incremented by 2 prior to the addition of e.

Call and Return Group

CALL mn	(SP-1) ← PCH (SP-2) ← PCL PC ← mn	•	•	X	•	•	•	11 001 101 CD	3	5	17	
CALL cc, nn	If condition cc is false, continue. otherwise same as CALL mn	•	•	X	•	•	•	11 cc 100	3	3	10	If cc is false.
RET	PC ← (SP) PCH ← (SP+1)	•	•	X	•	•	•	11 001 001 CS	1	3	10	
RET cc	If condition cc is false, continue. otherwise same as RET	•	•	X	•	•	•	11 cc 000	1	1	5	If cc is false.
RETI	Return from interrupt	•	•	X	•	•	•	11 101 101 ED	2	4	14	cc Condition 000 NZ non-zero 001 Z zero 010 NC non-carry 011 C carry 100 PO parity odd 101 PE parity even 110 P sign positive 111 M sign negative
RST P	(SP-1) ← PCH (SP-2) ← PCL PCH ← P	•	•	X	•	•	•	11 t 111	1	3	11	t P 000 00H 001 08H 010 10H 011 18H 100 20H 101 28H 110 30H 111 38H

NOTE: RETN loads IF2 - IF7

Input and Output Group

Mnemonic	Symbolic Operation	S	Z	Flags H	P/V	N	C	Opcode 76 543 210 Hex	No. of Bytes	No. of M Cycles	No. of T States	Comments
IN A, (n)	A ← (n)	•	•	X	•	•	•	11 011 011 DB	2	3	11	n to A0 - A7
IN r, (C)	r ← (C) If r = 110 only the flags will be affected	1	1	X	1	X	P 0 •	11 101 101 ED 01 r 000	2	3	12	Acc. to A0 - A7 C to A0 - A7 B to A0 - A15
IN r	(HL) ← (C) B ← B - 1	X	1	X	X	X	1 X	10 100 010 A2	2	4	16	C to A0 - A7 B to A0 - A15
INR	(HL) ← (HL) + 1 B ← B - 1 Repeat until B = 0	X	1	X	X	X	1 X	11 101 101 ED 10 110 010 B2	2	5 4 16	21 4 16	C to A0 - A7 B to A0 - A15 (If B ≠ 0)
IND	(HL) ← (HL) - 1 B ← B - 1 Repeat until B = 0	X	1	X	X	X	1 X	11 101 101 ED 10 101 010 AA	2	4	16	C to A0 - A7 B to A0 - A15
INR	(HL) ← (HL) + 1 B ← B - 1 Repeat until B = 0	X	1	X	X	X	1 X	11 101 101 ED 10 111 010 BA	2	5 4 16	21 4 16	C to A0 - A7 B to A0 - A15 (If B ≠ 0)
OUT (n), A	(n) ← A	•	•	X	•	•	•	11 010 011 D3	2	3	11	n to A0 - A7 Acc. to A0 - A15
OUT (C), r	(C) ← r	•	•	X	•	•	•	11 101 101 ED 01 r 001	2	3	12	C to A0 - A7 B to A0 - A15
OUT r	(C) ← (HL) B ← B - 1	X	1	X	X	X	1 X	11 101 101 ED 10 100 011 A3	2	4	16	C to A0 - A7 B to A0 - A15
OTR	(C) ← (HL) + 1 B ← B - 1 Repeat until B = 0	X	1	X	X	X	1 X	11 101 101 ED 10 110 011 B3	2	5 4 16	21 4 16	C to A0 - A7 B to A0 - A15 (If B ≠ 0)
OUTD	(C) ← (HL) B ← B - 1 HL ← HL - 1	X	1	X	X	X	1 X	11 101 101 ED 10 101 011 AB	2	4	16	C to A0 - A7 B to A0 - A15
OTDR	(C) ← (HL) B ← B - 1 HL ← HL - 1 Repeat until B = 0	X	1	X	X	X	1 X	11 101 101 ED 10 111 011 C1	2	5 4 16	21 4 16	C to A0 - A7 B to A0 - A15 (If B ≠ 0)

NOTE: ① If the result of B - 1 is zero the Z flag is set, otherwise it is reset.

Summary of Flag Operation

Instruction	D ₇	S	Z	H	P/V	N	C	Comments
ADD A, #; ADC A, #	1	1	1	1	X	0	1	8-bit add or add with carry.
SUB S; SBC A, #; CP #; NEG	1	1	1	1	X	0	1	8-bit subtract; subtract with carry; compare and negate accumulator.
AND S; XOR #	1	1	1	1	X	0	0	Logical operations.
INC #	1	1	1	1	X	0	0	8-bit increment.
DEC #	1	1	1	1	X	0	0	8-bit decrement.
ADJ #; D; #	1	1	1	1	X	0	1	16-bit add.
ADJ #; S; #	1	1	1	1	X	0	1	16-bit add with carry.
SBC #; HL; #	1	1	1	1	X	0	1	16-bit subtract with carry.
RLA; RLC; RRA; RRC	1	1	1	1	X	0	0	Rotate accumulator.
RLA; RLC; RR; m;	1	1	1	1	X	0	0	Rotate and shift locations.
RRC; m; SLA; m;	1	1	1	1	X	0	0	Rotate and shift locations.
SRA; m; SRL; m	1	1	1	1	X	0	0	Rotate and shift locations.
RLD; RRD	1	1	1	1	X	0	0	Rotate digit left and right.
DAA	1	1	1	1	X	0	0	Decimal adjust accumulator.
CPL	1	1	1	1	X	0	0	Complement accumulator.
CFI	1	1	1	1	X	0	0	Set carry.
CCF	1	1	1	1	X	0	0	Complement carry.
IN f(C)	1	1	1	1	X	0	0	Input register indirect.
OUT f(C)	1	1	1	1	X	0	0	Block input and output. Z = 0 if B ≠ 0 otherwise Z = 0.
IN; IND; OUT; OIND	1	1	1	1	X	0	0	Block transfer instructions. P/V = 1 if BC ≠ 0, otherwise P/V = 0.
INR; INDR; OTIR; OTDR	1	1	1	1	X	0	0	Block transfer instructions. Z = 1 if A = (HL), otherwise Z = 0. P/V = 1 if BC ≠ 0, otherwise P/V = 0.
LDI; LDDR	1	1	1	1	X	0	0	The content of the interrupt enable flip-flop (IFF) is copied into the P/V flag.
LDD; LDDR	1	1	1	1	X	0	0	The state of bit b of location s is copied into the Z flag.
CPI; CPDR; CPDR	1	1	1	1	X	0	0	
LD A, I; LD A, R	1	1	1	1	X	0	0	
BIT b, s	1	1	1	1	X	0	0	

Symbol	Operation
S	Sign flag. S = 1 if the MSB of the result is 1.
Z	Zero flag. Z = 1 if the result of the operation is 0.
P/V	Parity or overflow flag. Parity (P) and overflow (V) share the same flag. Logical operations affect this flag with the parity of the result while arithmetic operations affect this flag with the overflow of the result. If P/V holds parity, P/V = 1 if the result of the operation is even, P/V = 0 if result is odd. If P/V holds overflow, P/V = 1 if the result of the operation produced an overflow.
H	Half-carry flag. H = 1 if the add or subtract operation produced a carry into or borrow from bit 4 of the accumulator.
N	Add/Subtract flag. N = 1 if the previous operation was a subtract.
H & N	H and N flags are used in conjunction with the decimal adjust instruction (DAA) to properly correct the result into packed BCD format following addition or subtraction using operands with packed BCD format.
C	Carry/Link flag. C = 1 if the operation produced a carry from the MSB of the operand or result.

Symbol	Operation
I	The flag is affected according to the result of the operation.
0	The flag is unchanged by the operation.
1	The flag is reset by the operation.
X	The flag is set by the operation.
V	P/V flag affected according to the overflow result of the operation.
P	P/V flag affected according to the parity result of the operation.
r	Any one of the CPU registers A, B, C, D, E, H, L.
s	Any 8-bit location for all the addressing modes allowed for the particular instruction.
ss	Any 16-bit location for all the addressing modes allowed for that instruction.
ii	Refresh counter.
n	8-bit value in range < 0, 255 >.
nn	16-bit value in range < 0, 65535 >.

Pin Descriptions

A₀-A₁₅. Address Bus (output, active High, 3-state). A₉-A₁₅ form a 16-bit address bus. The Address Bus provides the address for memory data bus exchanges (up to 64K bytes) and for I/O device exchanges.

BUSACK. Bus Acknowledge (output, active Low). Bus Acknowledge indicates to the requesting device that the CPU address bus, data bus, and control signals MREQ, IORQ, RD, and WR have entered their high-impedance states. The external circuitry can now control these lines.

BUSREQ. Bus Request (input, active Low). Bus Request has a higher priority than NMI and is always recognized at the end of the current machine cycle. BUSREQ forces the CPU address bus, data bus, and control signals MREQ, IORQ, RL, and WR to go to a high-impedance state so that other devices can control these lines. BUSREQ is normally wire-ORed and requires an external pullup for these applications. Extended BUSREQ periods due to extensive DMA operations can prevent the CPU from properly refreshing dynamic RAMs.

D₀-D₇. Data Bus (input/output, active High, 3-state). D₀-D₇ constitute an 8-bit bidirectional data bus, used for data exchanges with memory and I/O.

HALT. Halt State (output, active Low). HALT indicates that the CPU has executed a Halt instruction and is awaiting either a non-maskable or a maskable interrupt (with the mask enabled) before operation can resume. While halted, the CPU executes NOPs to maintain memory refresh.

INT. Interrupt Request (input, active Low). Interrupt Request is generated by I/O devices. The CPU honors a request at the end of the current instruction if the internal software-controlled interrupt enable flip-flop (IFF) is enabled. INT is normally wire-ORed and requires an external pullup for these applications.

IORQ. Input/Output Request (output, active Low, 3-state). IORQ indicates that the lower half of the address bus holds a valid I/O address for an I/O read or write operation. IORQ is also generated concurrently with MI during an interrupt acknowledge cycle to indicate that an interrupt response vector

can be placed on the data bus.

MI. Machine Cycle One (output, active Low). MI, together with MREQ, indicates that the current machine cycle is the opcode fetch cycle of an instruction execution. MI, together with IORQ, indicates an interrupt acknowledge cycle.

MREQ. Memory Request (output, active Low, 3-state). MREQ indicates that the address bus holds a valid address for a memory read or memory write operation.

NMI. Non-Maskable Interrupt (input, negative edge-triggered). NMI has a higher priority than INT. NMI is always recognized at the end of the current instruction, independent of the status of the interrupt enable flip-flop, and automatically forces the CPU to restart at location 0066H.

RD. Read (output, active Low, 3-state). RD indicates that the CPU wants to read data from memory or an I/O device. The addressed I/O device or memory should use this signal to gate data onto the CPU data bus.

RESET. Reset (input, active Low). RESET initializes the CPU as follows: it resets the interrupt enable flip-flop, clears the PC and Registers I and R, and sets the interrupt status to Mode 0. During reset time, the address and data bus go to a high-impedance state, and all control output signals go to the inactive state. Note that RESET must be active for a minimum of three full clock cycles before the reset operation is complete.

RFSH. Refresh (output, active Low). RFSH, together with MREQ, indicates that the lower seven bits of the system's address bus can be used as a refresh address to the system's dynamic memories.

WAIT. Wait (input, active Low). WAIT indicates to the CPU that the addressed memory or I/O devices are not ready for a data transfer. The CPU continues to enter a Wait state as long as this signal is active. Extended WAIT periods can prevent the CPU from refreshing dynamic memory properly.

WR. Write (output, active Low, 3-state). WR indicates that the CPU data bus holds valid data to be stored at the addressed memory or I/O location.

CPU Timing


The Z80 CPU executes instructions by proceeding through a specific sequence of operations:

- Memory read or write
- I/O device read or write
- Interrupt acknowledge

The basic clock period is referred to as a T time or cycle, and three or more T cycles make up a machine cycle (M1, M2 or M3 for instance). Machine cycles can be extended either by the CPU automatically inserting one or more Wait states or by the insertion of one or more Wait states by the user.

Instruction Opcode Fetch. The CPU places the contents of the Program Counter (PC) on the address bus at the start of the cycle (Figure 5). Approximately one-half clock cycle later, MREQ goes active. When active, RD indicates that the memory data can be enabled onto the CPU data bus.

The CPU samples the WAIT input with the falling edge of clock state T₂. During clock states T₃ and T₄ of an M1 cycle dynamic RAM refresh can occur while the CPU starts decoding and executing the instruction. When the Refresh Control signal becomes active, refreshing of dynamic memory can take place.

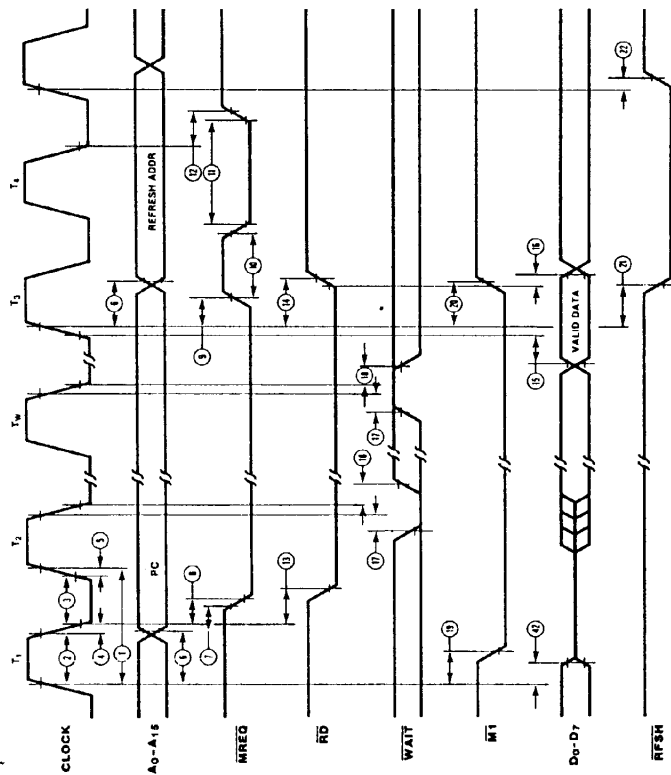

NOTE: T_w-Wait cycle added when necessary for slow ancillary devices.

Figure 5. Instruction Opcode Fetch

CPU Timing (Continued)

Memory Read or Write Cycles. Figure 6 shows the timing of memory read or write cycles other than an opcode fetch (M1) cycle. The MREQ and RD signals function exactly as in the fetch cycle. In a memory write

cycle, MREQ also becomes active when the address bus is stable. The WR line is active when the data bus is stable, so that it can be used directly as an R/W pulse to most semiconductor memories.


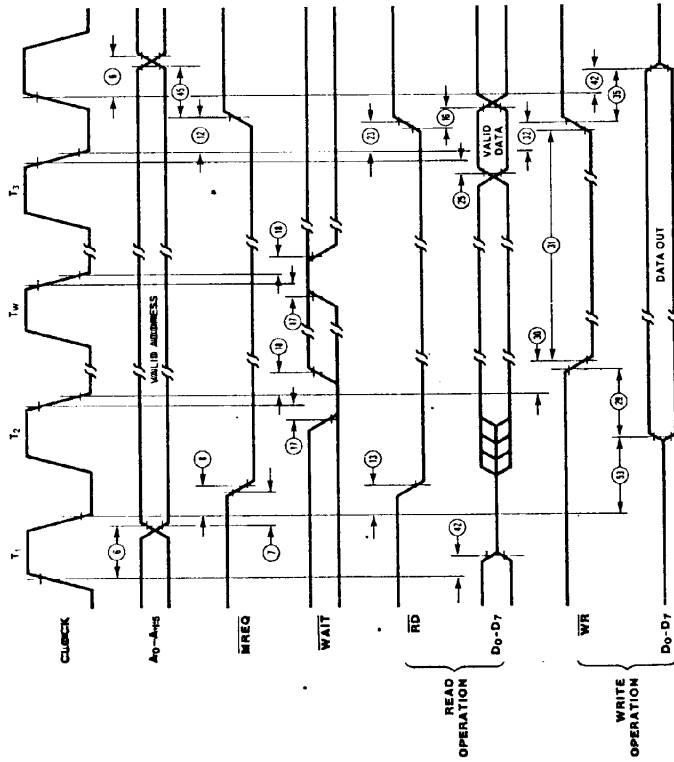


Figure 6. Memory Read or Write Cycles

CPU Timing (Continued)

Input or Output Cycles. Figure 7 shows the timing for an I/O read or I/O write operation. During I/O operations, the CPU automatically inserts a single Wait state (T_w).

This extra Wait state allows sufficient time for an I/O port to decode the address from the port address lines.

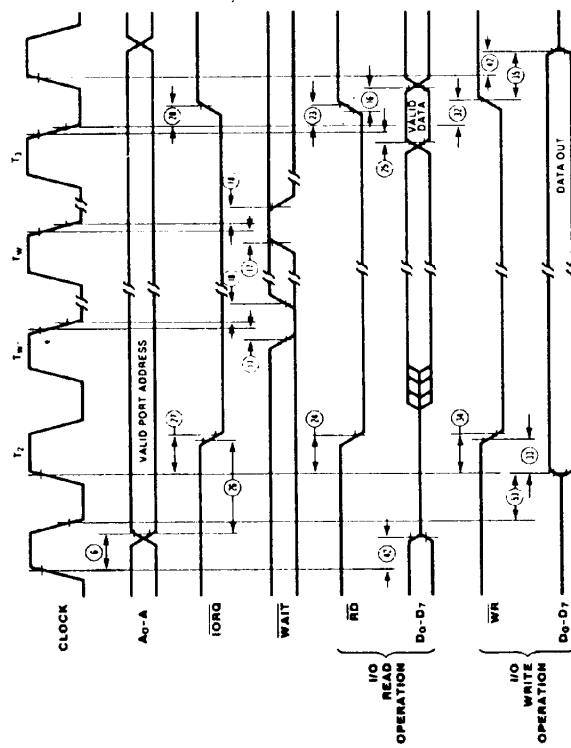


NOTE: T_w = One Wait cycle automatically inserted by CPU.

Figure 7. Input or Output Cycles

CPU Timing (Continued)

Interrupt Request/Acknowledge Cycle. The CPU samples the interrupt signal with the rising edge of the last clock cycle at the end of any instruction (Figure 8). When an interrupt is accepted, a special MI cycle is generated.

During this MI cycle, \overline{IORQ} becomes active (instead of \overline{MREQ}) to indicate that the interrupting device can place an 8-bit vector on the data bus. The CPU automatically adds two Wait states to this cycle.

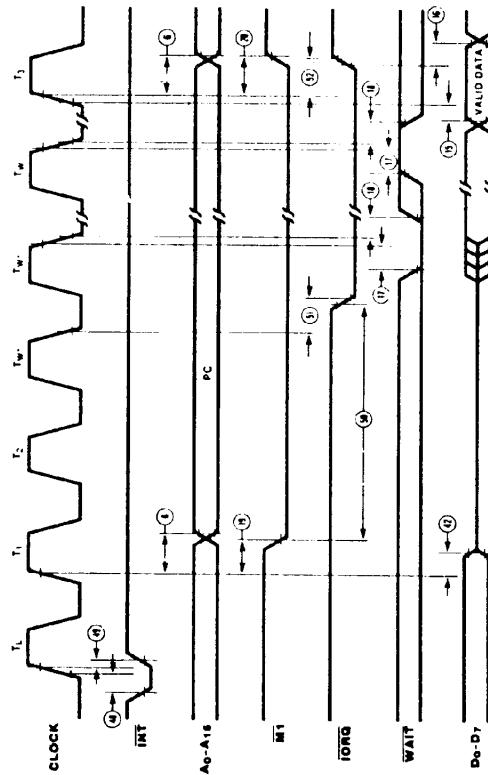

NOTE: 1) T_L = Last state of previous instruction.


2) Two Wait cycles automatically inserted by CPU(*).

Figure 8. Interrupt Request/Acknowledge Cycle

CPU Timing (Continued)

Non-Maskable Interrupt Request Cycle. NMI is sampled at the same time as the maskable interrupt input INT but has higher priority and cannot be disabled under software control. The subsequent timing is similar to that of a normal instruction fetch

except that data put on the bus by the memory is ignored. The CPU instead executes a restart (RST) operation and jumps to the NMI service routine located at address 0066H (Figure 9).

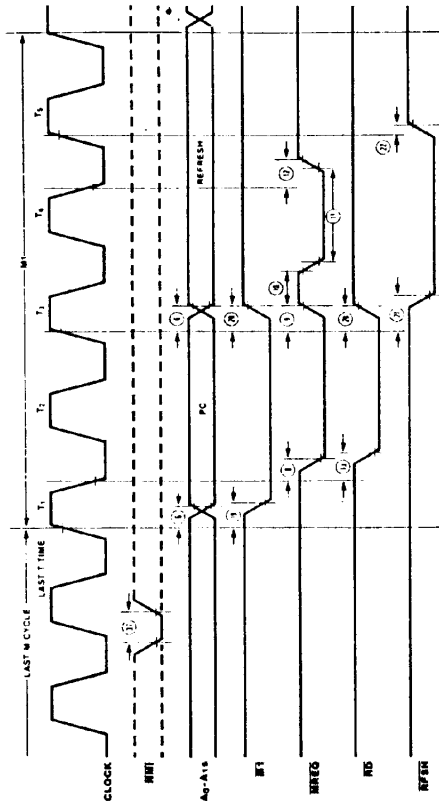


* Although NMI is an asynchronous input, to guarantee its being recognized on the following machine cycle, NMI's falling edge must occur no later than the rising edge of the clock cycle preceding T_{LAST}.

Figure 9. Non-Maskable Interrupt Request Operation

CPU Timing (Continued)

Bus Request/Acknowledge Cycle. The CPU samples BUSREQ with the rising edge of the last clock period of any machine cycle (Figure 10). If BUSREQ is active, the CPU sets its address, data, and MREQ, IORQ, RD,

and WR lines to a high-impedance state with the rising edge of the next clock pulse. At that time, any external device can take control of these lines, usually to transfer data between memory and I/O devices.

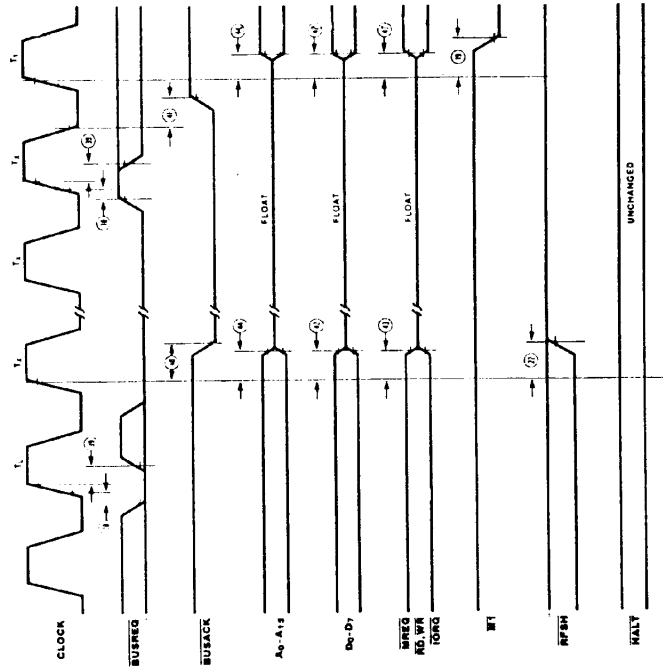

NOTE: T₁ = Last state of any M cycle.

T_x = An arbitrary clock cycle used by requesting device.


Figure 10. Z-Bus Request/Acknowledge Cycle

CPU Timing (Continued)

Halt Acknowledge Cycle. When the CPU receives an Halt instruction, it executes NOP states until either an INT or NMI input is received. When in the Halt state, the HALT output is active and remains so until an interrupt is received (Figure 11).

Reset Cycle. RESET must be active for at least three clock cycles for the CPU to

properly accept it. As long as RESET remains active, the address and data buses float, and the control outputs are inactive. Once RESET goes inactive, three internal I cycles are consumed before the CPU resumes normal processing operation. RESET clears the PC register, so the first opcode fetch will be to location 0000 (Figure 12).

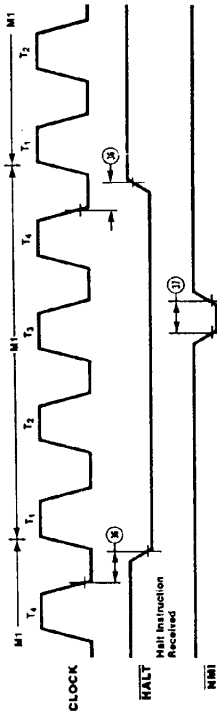

* See note, Figure 9.

Figure 11. Halt Acknowledge Cycle

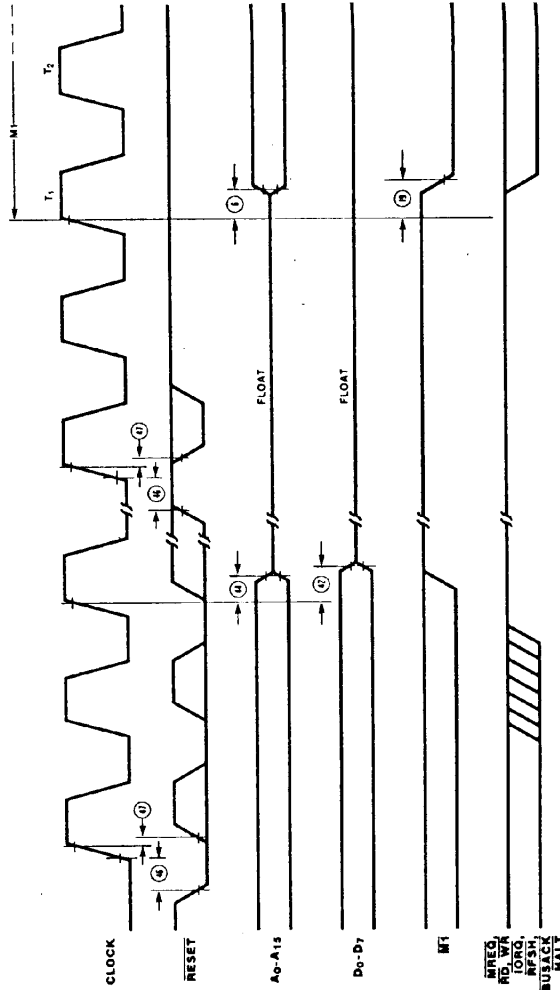



Figure 12. Reset Cycle

NOTE: INT will also force a Halt exit.

AC Characteristics

Number	Symbol	Parameter	Z8400		Z8400A		Z8400B		Z8400H	
			Min (ns)	Max (ns)	Min (ns)	Max (ns)	Min (ns)	Max (ns)	Min (ns)	Max (ns)
1	T _c	Clock Cycle Time	400*	250*	250*	165*	165*	125*	125*	
2	T _{wCh}	Clock Pulse Width (High)	180*	110*	110*	65*	65*	55*	55*	
3	T _{wCl}	Clock Pulse Width (Low)	180	2000	110	2000	65	2000	55	2000
4	T _{fC}	Clock Fall Time	—	30	—	30	—	20	—	10
5	T _{rC}	Clock Rise Time	—	30	—	30	—	20	—	10
6	T _{dCr(A)}	Clock ↑ to Address Valid Delay	—	145	—	110	—	90	—	80
7	T _{dA(MREQ)}	Address Valid to MREQ ↓ Delay	125*	—	65*	—	35*	—	20*	—
8	T _{dC(MREQ)}	Clock ↓ to MREQ ↓ Delay	—	100	—	85	—	70	—	60
9	T _{dC(MREQ)}	Clock ↑ to MREQ ↑ Delay	—	100	—	85	—	70	—	60
10	T _{wMREQh}	MREQ Pulse Width (High)	170*	110*	110*	65*	65*	45*	45*	
11	T _{wMREQl}	MREQ Pulse Width (Low)	360*	220*	220*	135*	135*	100*	100*	
12	T _{dC(MREQ)}	Clock ↓ to MREQ ↑ Delay	—	100	—	85	—	70	—	60
13	T _{dC(RD)}	Clock ↓ to RD ↓ Delay	—	130	—	95	—	80	—	70
14	T _{dC(RD)}	Clock ↑ to RD ↑ Delay	—	100	—	85	—	70	—	60
15	T _{sD(Cr)}	Data Setup Time to Clock ↑	50	35	35	30	30	30	30	
16	T _{dH(RD)}	Data Hold Time to RD ↑	—	0	—	0	—	0	—	0
17	T _{sWAIT(C)}	WAIT Setup Time to Clock ↓	70	70	70	60	60	50	50	
18	T _{hWAIT(C)}	WAIT Hold Time after Clock ↓	—	0	—	0	—	0	—	0
19	T _{dCr(MI)}	Clock ↑ to MI ↓ Delay	—	130	—	100	—	80	—	70
20	T _{dCr(MI)}	Clock ↑ to MI ↑ Delay	—	130	—	100	—	80	—	70
21	T _{dCr(RFSH)}	Clock ↑ to RFSH ↓ Delay	—	180	—	130	—	110	—	95
22	T _{dCr(RFSH)}	Clock ↑ to RFSH ↑ Delay	—	150	—	120	—	100	—	85
23	T _{dC(RD)}	Clock ↓ to RD ↑ Delay	—	110	—	85	—	70	—	60
24	T _{dC(RD)}	Clock ↑ to RD ↓ Delay	—	110	—	85	—	70	—	60
25	T _{sD(Cr)}	Data Setup to Clock ↓ during M ₂ , M ₃ , M ₄ or M ₅ Cycles	60	50	50	40	40	30	30	
26	T _{dA(IORQ)}	Address Stable prior to IORQ ↓	320*	180*	180*	110*	110*	75*	75*	
27	T _{dC(IORQ)}	Clock ↑ to IORQ ↓ Delay	—	90	—	75	—	65	—	55
28	T _{dC(IORQ)}	Clock ↓ to IORQ ↑ Delay	—	110	—	85	—	70	—	60
29	T _{dC(WR)}	Data Stable prior to WR ↓	190*	80*	80*	25*	25*	5*	5*	
30	T _{dC(WR)}	Clock ↓ to WR ↓ Delay	—	90	—	80	—	70	—	60
31	T _{wWF}	WR Pulse Width	360*	220*	220*	135*	135*	100*	100*	
32	T _{dC(WR)}	Clock ↓ to WR ↑ Delay	—	100	—	80	—	70	—	60
33	T _{dD(WR)}	Data Stable prior to WR ↑	20*	-10*	-10*	-55*	-55*	55*	55*	
34	T _{dC(WR)}	Clock ↑ to WR ↓ Delay	—	80	—	65	—	60	—	55
35	T _{dWR(D)}	Data Stable from WR ↑	120*	60*	60*	30*	30*	15*	15*	

* For clock periods other than the minimums shown in the table, calculate parameters using the expressions in the table on the following page. All timings are preliminary and subject to change.



AC Characteristics (Continued)

Number	Symbol	Parameter	Z8400		Z8400A		Z8400B		Z8400H	
			Min (ns)	Max (ns)	Min (ns)	Max (ns)	Min (ns)	Max (ns)	Min (ns)	Max (ns)
36	TdC(HALT)	Clock ↓ to HALT ↑ or ↓	—	300	—	300	—	260	—	225
37	TwNMI	NMI Pulse Width	80	—	80	—	70	—	60*	—
38	TaBUSEQ(Cr)	BUSEQ Setup Time to Clock ↑	80	—	50	—	50	—	40	—
39	TaBUSEQ(Cr)	BUSEQ Hold Time after Clock ↑	0	—	0	—	0	—	0	—
40	TdC(BUSACKf)	Clock ↑ to BUSACK ↓ Delay	—	120	—	100	—	90	—	80
41	TdC(BUSACKr)	Clock ↓ to BUSACK ↑ Delay	—	110	—	100	—	90	—	80
42	TdC(Tz)	Clock ↑ to Data Float Delay	—	90	—	90	—	80	—	70
43	TdC(CTz)	Clock ↑ to Control Outputs Float Delay (MREQ, IORQ, RD, and WR)	—	110	—	80	—	70	—	60
44	TdC(Az)	Clock ↑ to Address Float Delay	—	110	—	90	—	80	—	70
45	TdC(Tr(A))	MREQ ↑, IORQ ↑, RD ↑, and WR ↑ to Address Hold Time	160*	—	80*	—	35*	—	20*	—
46	TsRESET(Cr)	RESET to Clock ↑ Setup Time	90	—	60	—	60	—	45	—
47	ThRESET(Cr)	RESET to Clock ↑ Hold Time	—	0	—	0	—	0	—	0
48	TsINT(Cr)	INT to Clock ↑ Setup Time	80	—	80	—	70	—	55	—
49	ThINT(Cr)	INT to Clock ↑ Hold Time	—	0	—	0	—	0	—	0
50	TdMHI(IORQf)	MHI ↓ to IORQ ↓ Delay	920*	—	565*	—	365*	—	270*	—
51	TdC(IORQf)	Clock ↓ to IORQ ↓ Delay	—	110	—	85	—	70	—	60
52	TdC(IORQr)	Clock ↑ to IORQ ↑ Delay	—	100	—	85	—	70	—	60
53	TdC(D)	Clock ↓ to Data Valid Delay	—	230	—	150	—	130	—	115

* For clock periods other than the minimums shown in the table, calculate parameters using the expressions in the table on the following page.
All timings are preliminary and subject to change.

Footnotes to AC Characteristics

Number	Symbol	Z8400	Z8400A	Z8400B
1	TcC	TwCh + TwCl + TrC + TIC	TwCh + TwCl + TrC + TIC	TwCh + TwCl + TrC + TIC
2	TwCh	Although static by design, TwCh of greater than 200 μs is not guaranteed	Although static by design, TwCh of greater than 200 μs is not guaranteed	Although static by design, TwCh of greater than 200 μs is not guaranteed
7	TdA(MREQf)	TwCh + TIC - 75	TwCh + TIC - 65	TwCh + TIC - 50
10	TwMREQf	TwCh + TIC - 30	TwCh + TIC - 20	TwCh + TIC - 20
11	TwMREQr	TcC - 40	TcC - 30	TcC - 30
26	TdA(IORQf)	TcC - 80	TcC - 70	TcC - 55
29	TdD(WRf)	TcC - 210	TcC - 170	TcC - 140
31	TwWR	TcC - 40	TcC - 30	TcC - 30
33	TdD(WRf)	TwCl + TrC - 180	TwCl + TrC - 140	TwCl + TrC - 140
35	TdWRr(D)	TwCl + TrC - 80	TwCl + TrC - 70	TwCl + TrC - 55
45	TdC(Tr(A))	TwCl + TrC - 40	TwCl + TrC - 50	TwCl + TrC - 50
50	TdMHI(IORQf)	2TcC + TwCh + TIC - 80	2TcC + TwCh + TIC - 65	2TcC + TwCh + TIC - 50

AC Test Conditions:
V_{IL} = 2.0 V
V_{IH} = 0.8 V
V_{OL} = 0.8 V
V_{OHC} = V_{CC} - 0.6 V
V_{ILC} = 0.45 V
V_{OH} = 2.0 V
V_{OL} = 0.8 V
F_{LOAD} = ±0.5 V

Absolute Maximum Ratings

Storage Temperature ... -65°C to +150°C
Temperature Under Bias ... Specified operating range
Voltages on all inputs and outputs with respect to GND ... -0.3 V to +7.0 V
Power Dissipation 1.5 W


Stresses greater than those listed under Absolute Maximum stress rating may cause permanent damage to the device. This is a stress rating only; operation of the device at any condition above those indicated in the operational sections of these specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Standard Test Conditions

The characteristics below apply for the following standard test conditions, unless otherwise noted. All voltages are referenced to GND (0 V). Positive current flows into the referenced pin. Available operating temperature ranges are:

- 0°C to +70°C, +4.75 V ≤ V_{CC} ≤ +5.25 V
- -40°C to +85°C, +4.75 V ≤ V_{CC} ≤ +5.25 V
- -55°C to +125°C, +4.75 V ≤ V_{CC} ≤ +5.25 V

All ac parameters assume a load capacitance of 50 pF. Add 10 ns delay for each 50 pF increase in load up to a maximum of 200 pF for the data bus and 100 pF for address and control lines.





DC Characteristics

Symbol	Parameter	Min.	Max	Unit	Test Condition
V _{IL}	Clock Input Low Voltage	-0.3	0.45	V	
V _{IHC}	Clock Input High Voltage	V _{CC} - 0.6	V _{CC} + 0.3	V	
V _{IL}	Input Low Voltage	-0.3	0.8	V	
V _{IH}	Input High Voltage	2.0	V _{CC}	V	
V _{OL}	Output Low Voltage		0.4	V	I _{OL} = 1.8 mA
V _{OH}	Output High Voltage	2.4		V	I _{OH} = -250 μA
I _{CC}	Power Supply Current				
	Z80		150	mA	
	Z80A		200	mA	
	Z80B		200	mA	
	Z80H		200	mA	
I _{LI}	Input Leakage Current	-	10	μA	V _{IN} = 0 to V _{CC}
I _{LO}	3-State Output Leakage Current in Float	-10	10	μA	V _{OUT} = 0.4 to V _{CC}

1. For military grade parts, I_{CC} is 200 mA.
2. Typical rate for Z8400A is 90 mA.
3. A15-A0, D7-D0, MREQ, IORC, RD, and WR.

Capacitance

Symbol	Parameter	Min.	Max	Unit	Note
C _{CLOCK}	Clock Capacitance		35	pF	
C _{IN}	Input Capacitance		5	pf	Unmeasured pins returned to ground
C _{OUT}	Output Capacitance		10	pF	

T_A = 25°C, f = 1 MHz

Ordering Information

Type	Package	Temp.	Clock	Description
Z8400 B1	Plastic	0/ +70°C	2.5 MHz	Z80 Central Processing Unit
Z8400 B6	Plastic	-40/ +85°C		
Z8400 F1	Frit Seal	0/ +70°C		
Z8400 F6	Frit Seal	-40/ +85°C		
Z8400 D1	Ceramic	0/ +70°C		
Z8400 D6	Ceramic	-40/ +85°C		
Z8400 D2	Ceramic	-55/ +125°C		
Z8400 C1	Plastic Chip-Carrier	0/ +70°C		
Z8400 C6	Plastic Chip-Carrier	-40/ +85°C		
Z8400 K1	Ceramic Chip-Carrier	0/ +70°C		
Z8400 K6	Ceramic Chip-Carrier	-40/ +85°C		
Z8400 K2	Ceramic Chip-Carrier	-55/ +125°C		
Z8400A B1	Plastic	0/ +70°C	4.0 MHz	
Z8400A B6	Plastic	-40/ +85°C		
Z8400A F1	Frit Seal	0/ +70°C		
Z8400A F6	Frit Seal	-40/ +85°C		
Z8400A D1	Ceramic	0/ +70°C		
Z8400A D6	Ceramic	-40/ +85°C		
Z8400A D2	Ceramic	-55/ +125°C		
Z8400A C1	Plastic Chip-Carrier	0/ +70°C		
Z8400A C6	Plastic Chip-Carrier	-40/ +85°C		
Z8400A K1	Ceramic Chip-Carrier	0/ +70°C		
Z8400A K6	Ceramic Chip-Carrier	-40/ +85°C		
Z8400A K2	Ceramic Chip-Carrier	-55/ +125°C		
Z8400B B1	Plastic	0/ +70°C	6.0 MHz	
Z8400B B6	Plastic	-40/ +85°C		
Z8400B F1	Frit Seal	0/ +70°C		
Z8400B F6	Frit Seal	-40/ +85°C		
Z8400B D1	Ceramic	0/ +70°C		
Z8400B D6	Ceramic	-40/ +85°C		
Z8400B D2	Ceramic	-55/ +125°C		
Z8400B C1	Plastic Chip-Carrier	0/ +70°C		
Z8400B C6	Plastic Chip-Carrier	-40/ +85°C		
Z8400B K1	Ceramic Chip-Carrier	0/ +70°C		
Z8400B K6	Ceramic Chip-Carrier	-40/ +85°C		
Z8400B K2	Ceramic Chip-Carrier	-55/ +125°C		
Z8400H B1	Plastic	0/ +70°C	8.0 MHz	
Z8400H B6	Plastic	-40/ +85°C		
Z8400H F1	Frit Seal	0/ +70°C		
Z8400H F6	Frit Seal	-40/ +85°C		
Z8400H D1	Ceramic	0/ +70°C		
Z8400H D6	Ceramic	-40/ +85°C		
Z8400H C1	Plastic Chip-Carrier	0/ +70°C		
Z8400H C6	Plastic Chip-Carrier	-40/ +85°C		
Z8400H K1	Ceramic Chip-Carrier	0/ +70°C		
Z8400H K6	Ceramic Chip-Carrier	-40/ +85°C		