






查询"0916"供应商

## 0916 SERIES

This series of filters has been designed to meet tempest and other requirements where high insertion loss is necessary. This series is designed with feedthru Capacitors to provide attenuation to RF noise at frequencies from below 10 KHz to above 1 GHz

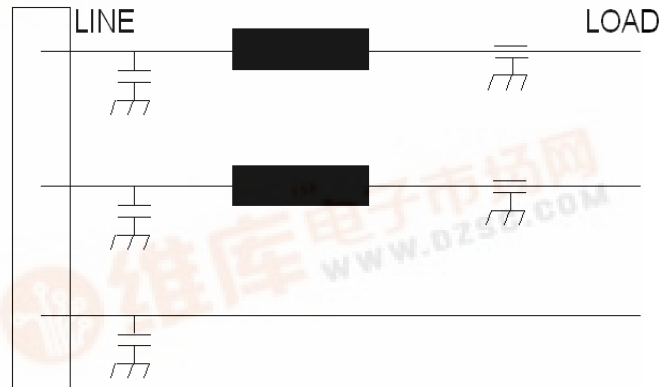

Operating Voltage = 125VAC  
Operating Current = 1,3,5 & 10 amperes  
Operating Frequency = 50—400 Hz  
Operating Temperature = -20 to 50 deg. C  
Dielectric Withstanding (Line-Ground) = 800 VDC for 1 minute  
Dielectric Withstanding (Line to Line) = 800 VDC for 1 minutes  
Leakage Current = 56 mA @ 125 VAC, 60Hz  
Residual Voltage (Max after 5 sec.) = 35 Volts

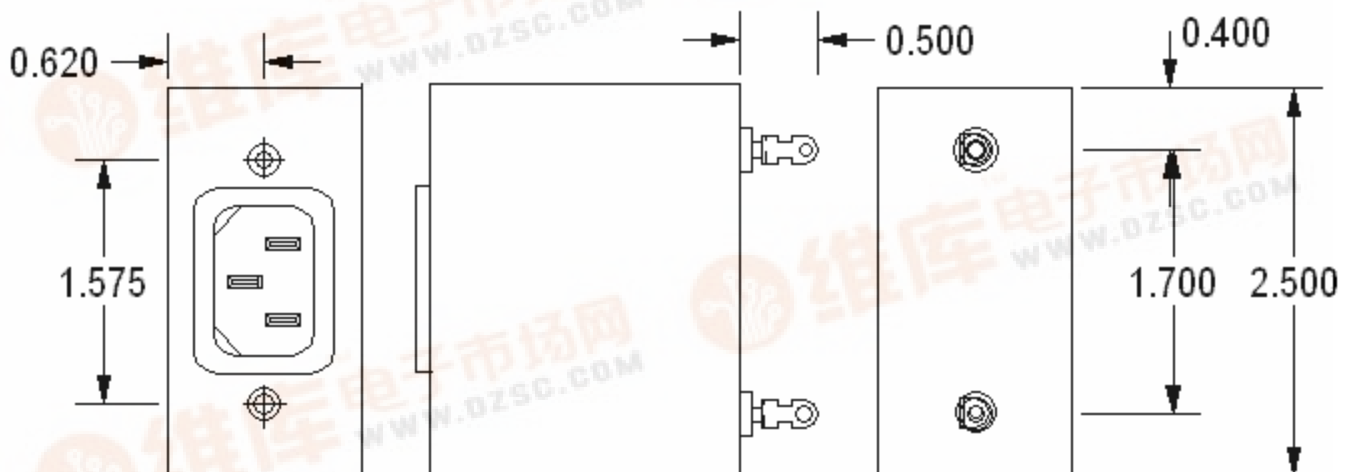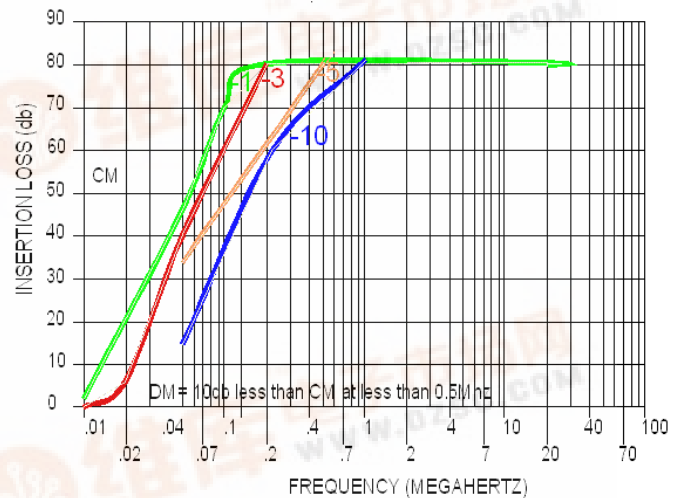

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115  
email: info@jmkfilters.com  
EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 Fax: 44-(0) 141 589 1884

