

**DESCRIPTION AND RATING**

The 6BS8 is a miniature, medium-mu twin triode designed for use as a VHF cascode amplifier. In this application, section two (pins 1, 2, and 3) is intended for the input section.

Except for heater ratings, the 4BS8 is identical to the 6BS8. In addition, the 4BS8 incorporates a controlled heater-warm-up characteristic which makes it especially suited for use in television receivers that employ series-connected heaters.

**GENERAL**

**ELECTRICAL**

|                                     |                  |                  |         |
|-------------------------------------|------------------|------------------|---------|
| Cathode—Coated Unipotential         | <b>4BS8</b>      | <b>6BS8</b>      |         |
| Heater Voltage, AC or DC            | 4.2              | 6.3              | Volts   |
| Heater Current                      | 0.6              | 0.4              | Amperes |
| Heater Warm-up Time*                | 11               | ...              | Seconds |
| Direct Interelectrode Capacitances† | <b>Section 1</b> | <b>Section 2</b> |         |
| Grid to Plate                       | 1.15             | 1.15             | μμf     |
| Input                               | 2.6              | ...              | μμf     |
| Output                              | 1.35             | ...              | μμf     |
| Heater to Cathode                   | 2.6              | 2.7              | μμf     |
| Plate Section 2, to Plate and Grid, |                  |                  |         |
| Section 1, maximum                  | 0.024            | ...              | μμf     |
| Plate to Plate, maximum             | 0.01             | ...              | μμf     |
| Plate to Cathode, maximum           | 0.15             | 0.15             | μμf     |
| Grounded-Grid Input                 | ...              | 4.95             | μμf     |
| Grounded-Grid Output                | ...              | 2.27             | μμf     |

**MECHANICAL**


Mounting Position—Any  
 Envelope—T-6½, Glass  
 Base—E9-1, Small Button 9-Pin

**MAXIMUM RATINGS**

**DESIGN-CENTER VALUES EACH SECTION**

|                                         |     |              |
|-----------------------------------------|-----|--------------|
| Plate Voltage                           | 150 | Volts        |
| Plate Dissipation                       | 2.0 | Watts        |
| DC Cathode Current                      | 20  | Milliamperes |
| Heater-Cathode Voltage                  |     |              |
| Heater Positive with Respect to Cathode |     |              |
| Total DC and Peak                       | 200 | Volts        |
| Heater Negative with Respect to Cathode |     |              |
| Total DC and Peak                       | 200 | Volts        |
| Grid Circuit Resistance                 | 0.5 | Megohms      |


**BASING DIAGRAM**



**TERMINAL CONNECTIONS**

- Pin 1—Plate (Section 2)
- Pin 2—Grid (Section 2)
- Pin 3—Cathode (Section 2)
- Pin 4—Heater
- Pin 5—Heater
- Pin 6—Plate (Section 1)
- Pin 7—Grid (Section 1)
- Pin 8—Cathode (Section 1)
- Pin 9—Internal Shield

**PHYSICAL DIMENSIONS**

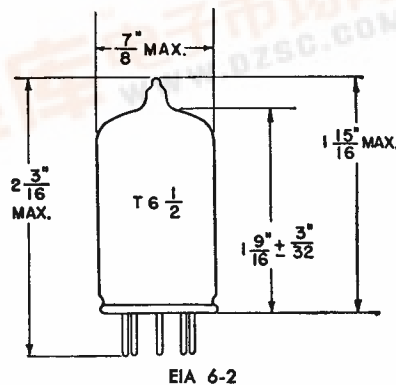

查询"4BS8"供应商
 **CHARACTERISTICS AND TYPICAL OPERATION**

**CLASS A<sub>1</sub> AMPLIFIER, EACH SECTION**

|                                       |      |              |
|---------------------------------------|------|--------------|
| Plate Voltage.....                    | 150  | Volts        |
| Cathode-Bias Resistor.....            | 220  | Ohms         |
| Amplification Factor.....             | 36   |              |
| Plate Resistance, approximate.....    | 5000 | Ohms         |
| Transconductance.....                 | 7200 | Micromhos    |
| Plate Current.....                    | 10   | Milliamperes |
| Grid Voltage, approximate†            |      |              |
| I <sub>b</sub> = 10 Microamperes..... | -7   | Volts        |

**CASCODE AMPLIFIER**


|                                    |       |              |
|------------------------------------|-------|--------------|
| Plate-Supply Voltage.....          | 250   | Volts        |
| Grid Voltage.....                  | -1.0  | Volts        |
| Transconductance.....              | 10000 | Micromhos    |
| Plate Current.....                 | 16    | Milliamperes |
| Grid Voltage, approximate          |       |              |
| G <sub>m</sub> = 50 Micromhos..... | -6    | Volts        |

\* The time required for the voltage across the heater to reach 80 percent of its rated value after applying 4 times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to 3 times the rated heater voltage divided by the rated heater current.


† With external shield (EIA-315) connected to pin 9.

‡ Section two only.

**AVERAGE PLATE CHARACTERISTICS**

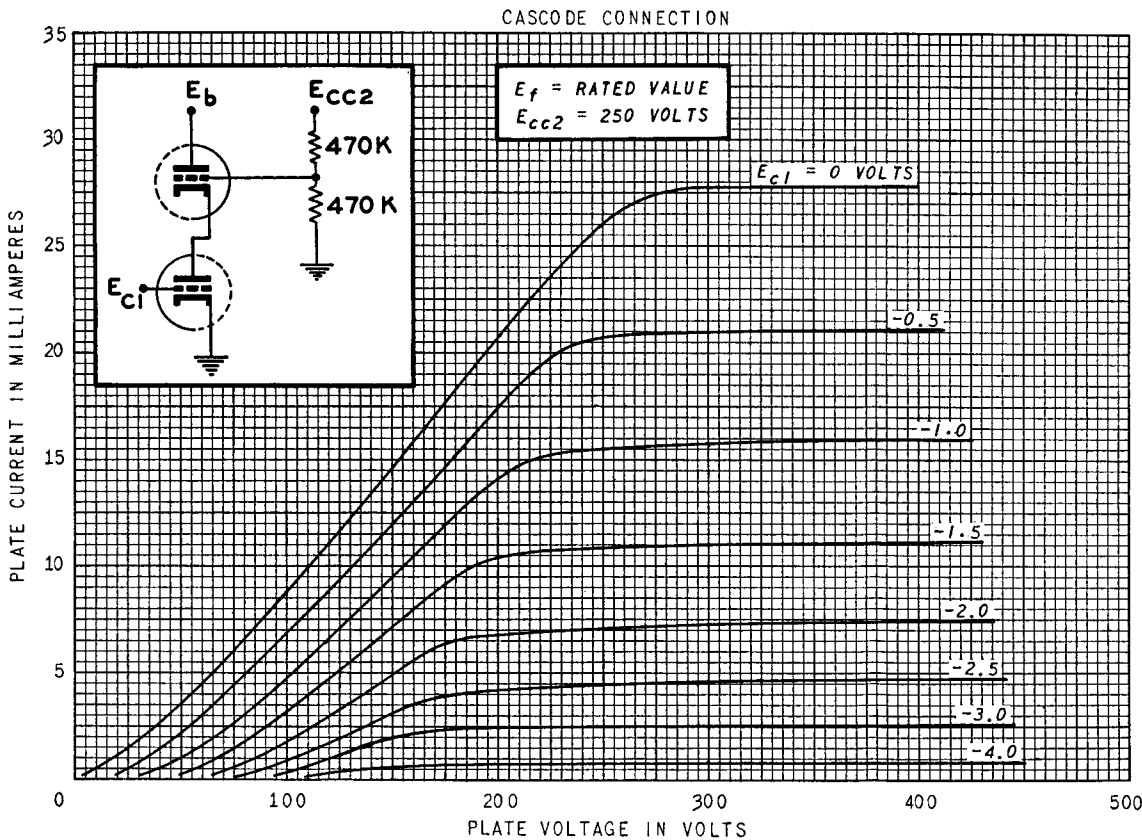


AVERAGE PLATE CHARACTERISTICS

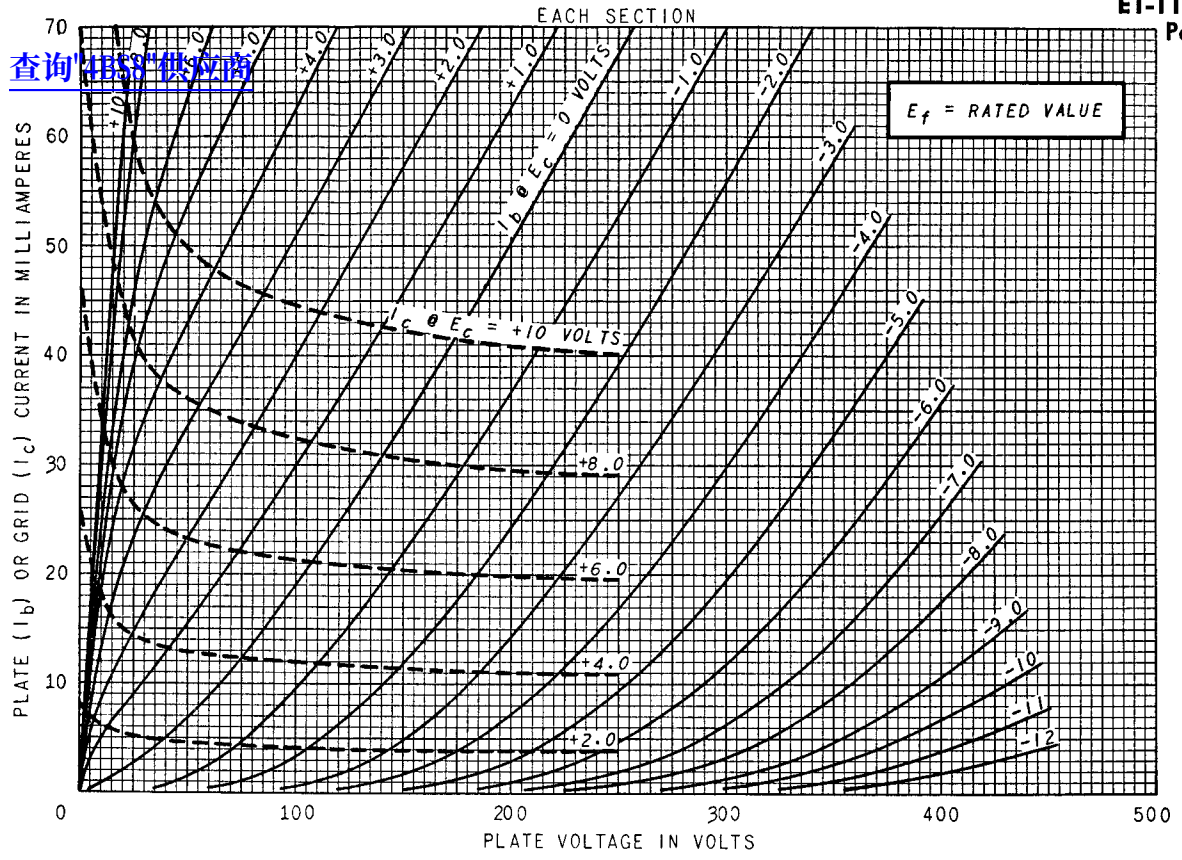

查询"4BS8"供应商


AVERAGE CHARACTERISTICS

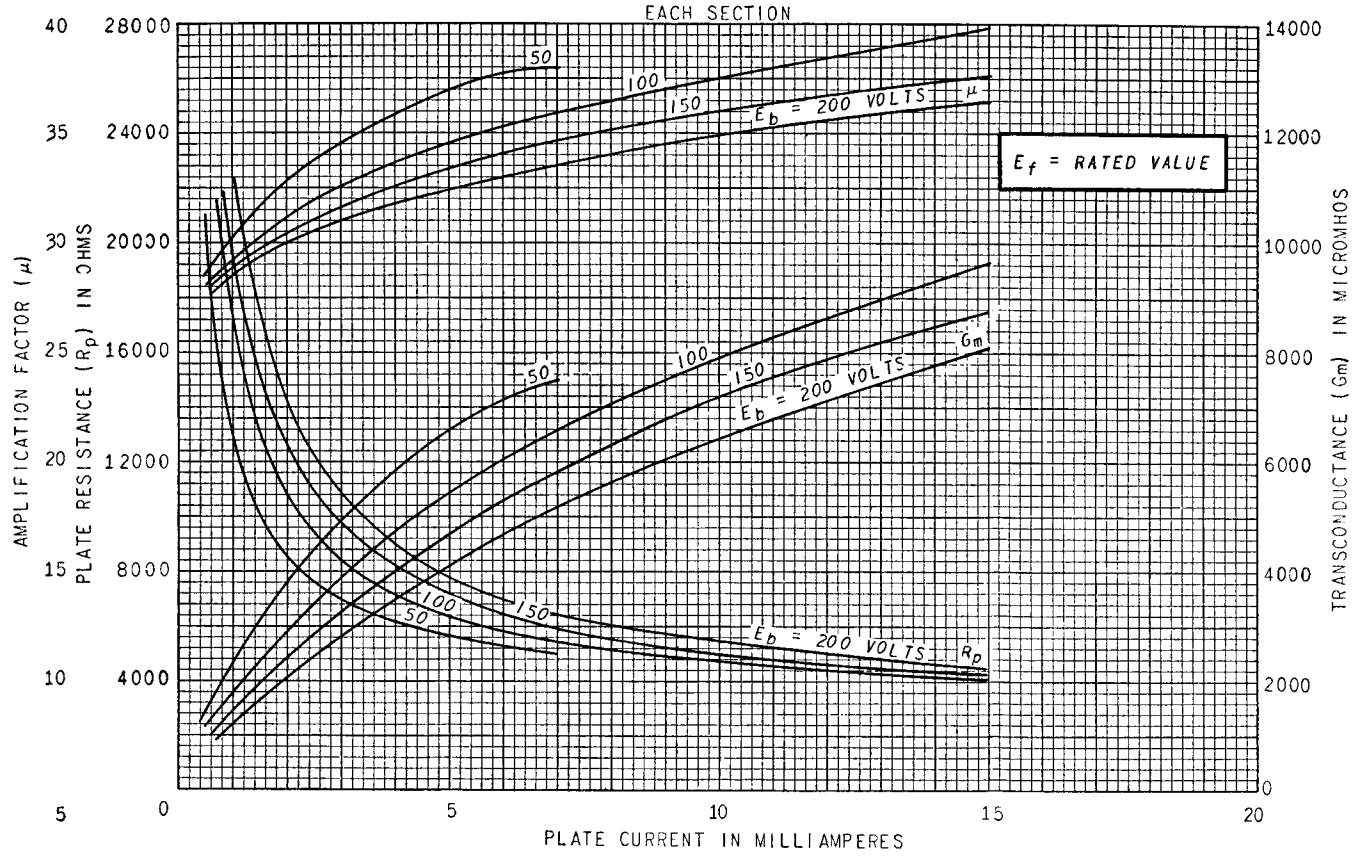

查询"4BS8"供应商


## AVERAGE TRANSFER CHARACTERISTICS

CASCODE CONNECTION

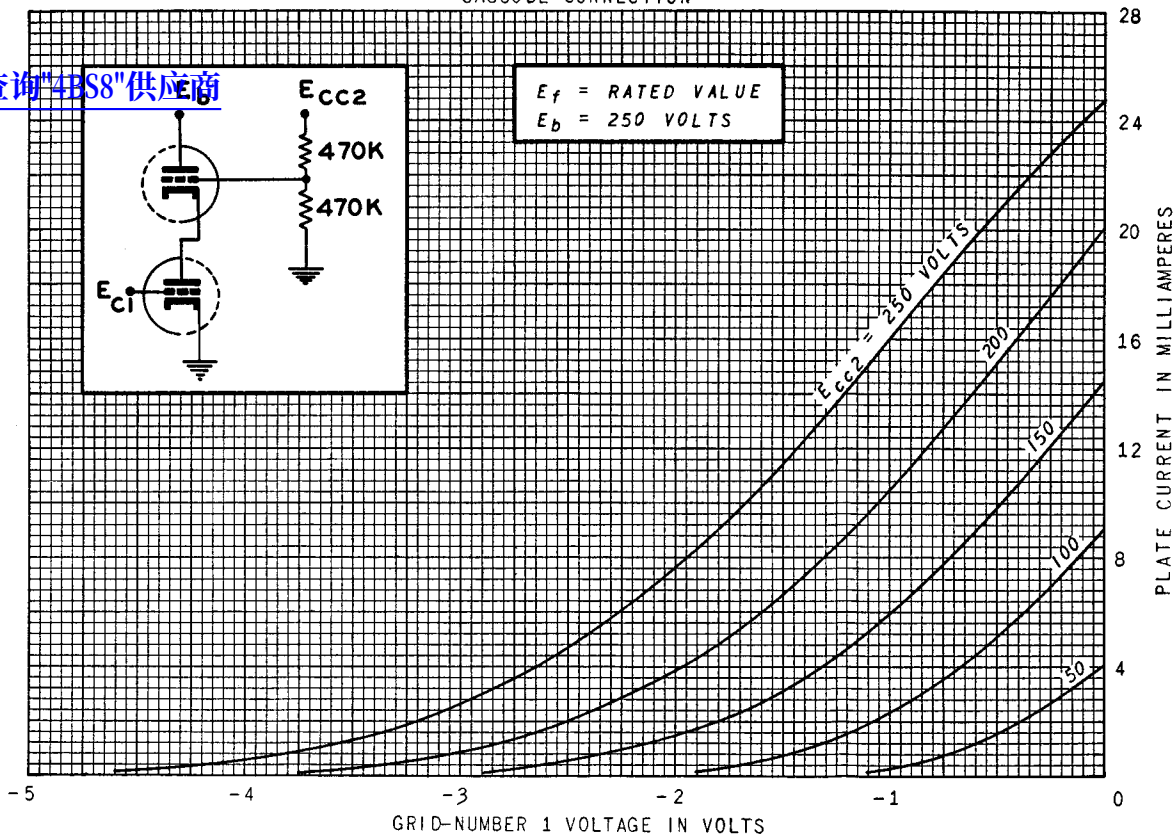

## AVERAGE TRANSFER CHARACTERISTICS

CASCODE CONNECTION

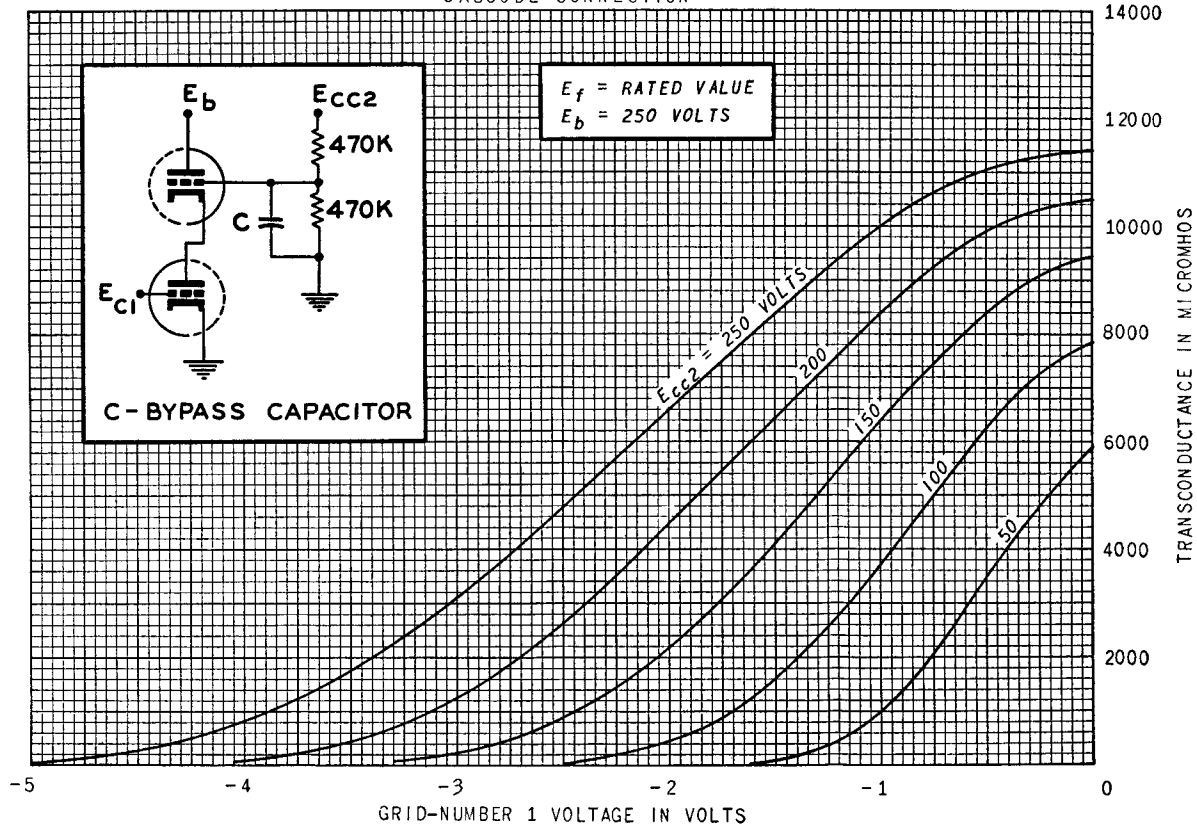

[查询"4BS8"供应商](#)

**AVERAGE TRANSFER CHARACTERISTICS**

EACH SECTION

