


## PBSS5140U

## FEATURES

- Low collector-emitter saturation voltage
- High current capability
- Improved device reliability due to reduced heat generation



## SOT-323

## APPLICATIONS

- General purpose switching and muting
- LCD back lighting
- Supply line switching circuits
- Battery driven equipment (mobile phones, video cameras and hand-held devices).

## ORDERING INFORMATION

| Type No.  | Marking | Package Code |
|-----------|---------|--------------|
| PBSS5140U | 51t     | SOT-323      |

MAXIMUM RATING @ Ta=25°C unless otherwise specified

| Symbol           | Parameter                                                                                     | Value       | Units |
|------------------|-----------------------------------------------------------------------------------------------|-------------|-------|
| V <sub>CBO</sub> | Collector-Base Voltage                                                                        | -40         | V     |
| V <sub>CEO</sub> | Collector-Emitter Voltage                                                                     | -40         | V     |
| V <sub>EBO</sub> | Emitter-Base Voltage                                                                          | -5          | V     |
| I <sub>C</sub>   | Collector Current -Continuous                                                                 | -1          | A     |
| P <sub>tot</sub> | total power dissipation    T <sub>amb</sub> ≤ 25°C; note 1<br>T <sub>amb</sub> ≤ 25°C; note 2 | 250         | mW    |
|                  |                                                                                               | 350         | mW    |
| T <sub>stg</sub> | Storage Temperature                                                                           | -65 to +150 | °C    |
| T <sub>j</sub>   | Junction Temperature                                                                          | 150         | °C    |
| T <sub>amp</sub> | operating ambient temperature                                                                 | -65 to +150 | °C    |

## Notes

1. Device mounted on a printed-circuit board, single sided copper, tinplated and standard footprint.
2. Device mounted on a printed-circuit board, single sided copper, tinplated and mounting pad for collector  $1\text{ cm}^2$ .



**40 V Low PNP Transistor**

**PBSS5140U**





**ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified**

| Parameter                            | Symbol        | Test conditions                                                                                                                | MIN                      | TYP | MAX                  | UNIT    |
|--------------------------------------|---------------|--------------------------------------------------------------------------------------------------------------------------------|--------------------------|-----|----------------------|---------|
| Collector cut-off current            | $I_{CBO}$     | $V_{CB}=-40V, I_E=0$                                                                                                           |                          |     | -0.1                 | $\mu A$ |
| Collector- Emitter cut-off current   | $I_{CEO}$     | $V_{CB}=-30V, I_E=0$                                                                                                           |                          |     | -0.1                 | $\mu A$ |
| Emitter cut-off current              | $I_{EBO}$     | $V_{EB}=-5V, I_C=0$                                                                                                            |                          |     | -0.1                 | $\mu A$ |
| DC current gain                      | $h_{FE}$      | $V_{CE}=-5V, I_C=-1\text{ mA}$<br>$V_{CE}=-5V, I_C=-100\text{mA}$<br>$V_{CE}=-5V, I_C=-500\text{ mA}$<br>$V_{CE}=-5V, I_C=-1A$ | 300<br>300<br>250<br>160 |     | 800                  |         |
| Collector-emitter saturation voltage | $V_{CE(sat)}$ | $I_C=-100\text{mA}, I_B=-1\text{mA}$<br>$I_C=-500\text{mA}, I_B=-50\text{mA}$<br>$I_C=-1A, I_B=-100\text{mA}$                  |                          |     | -200<br>-250<br>-500 | mV      |
| Base-emitter saturation voltage      | $V_{BE(sat)}$ | $I_C=-1A, I_B=-50\text{mA}$                                                                                                    |                          |     | -1.1                 | V       |
| base-emitter turn-on voltage         | $V_{BEon}$    | $V_{CE}=-5V, I_C=-1\text{ A}$                                                                                                  |                          |     | -1                   | V       |
| Transition frequency                 | $f_T$         | $V_{CE}=-10V,$<br>$I_C=-50\text{mA}, f=100\text{MHz}$                                                                          | 150                      |     |                      | MHz     |
| Collector output capacitance         | $C_{ob}$      | $V_{CB}=-10V, f=1\text{MHz}$                                                                                                   |                          |     | 12                   | pF      |

## 40 V Low PNP Transistor


## PBSS5140U

### TYPICAL CHARACTERISTICS @ $T_a=25^\circ\text{C}$ unless otherwise specified

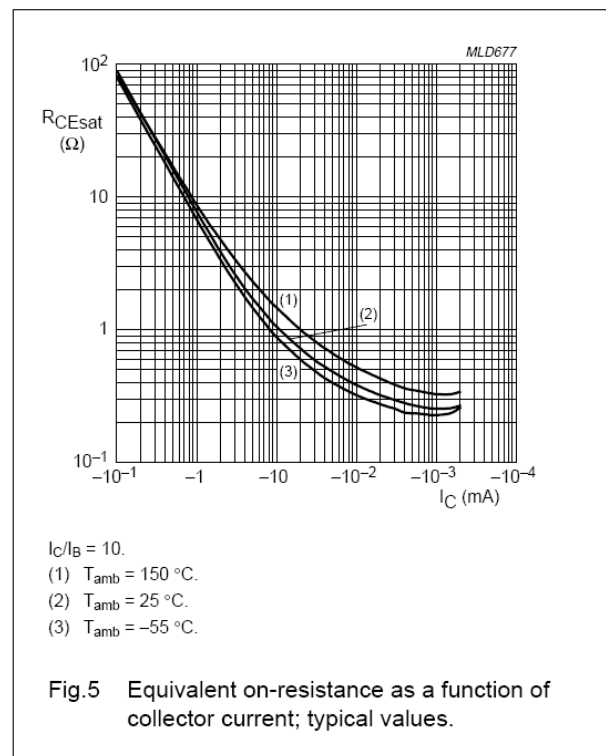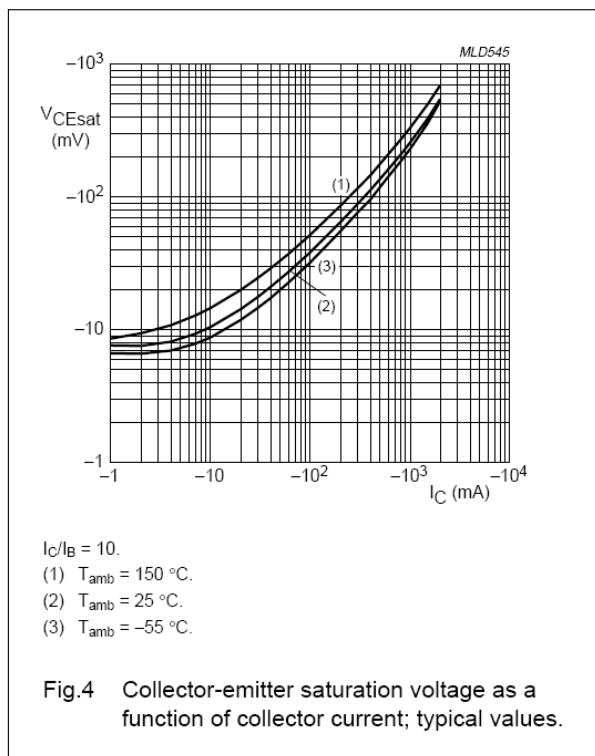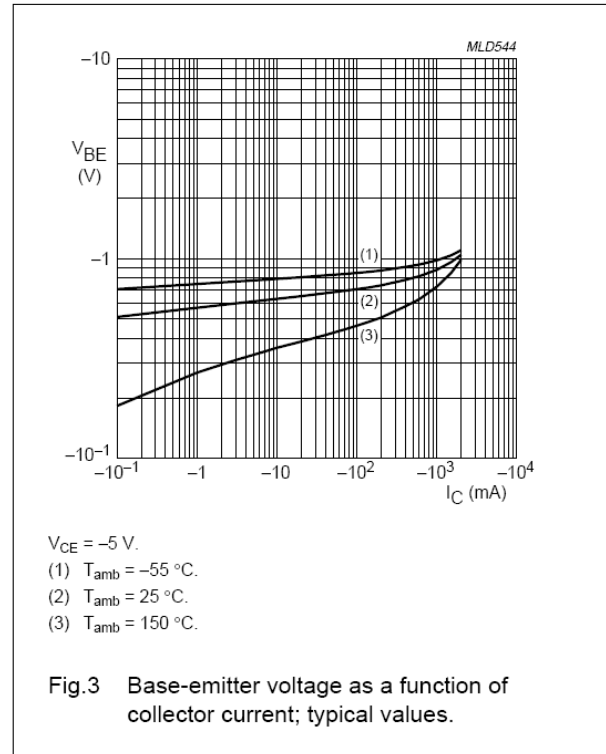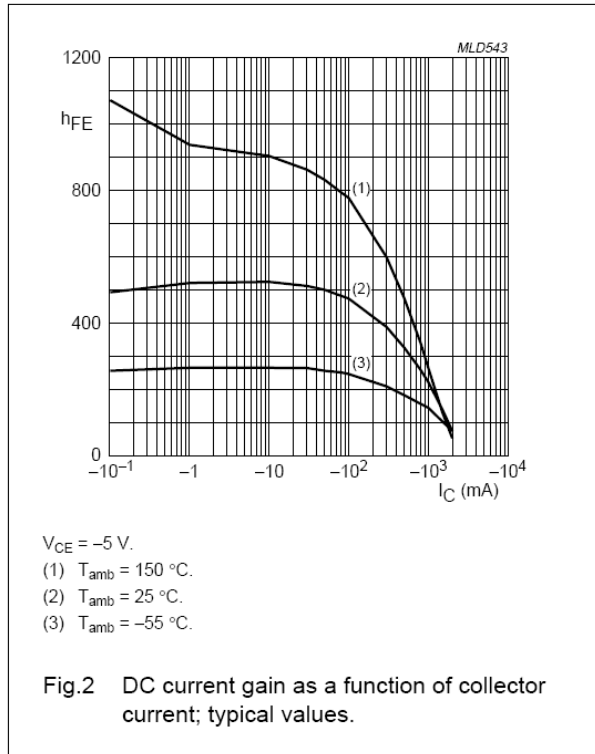

## 40 V Low PNP Transistor

## PBSS5140U

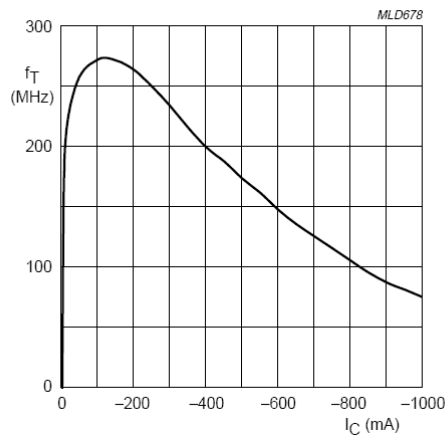

$V_{CE} = -10$  V.

- (1)  $T_{amb} = 150$  °C.
- (2)  $T_{amb} = 25$  °C.
- (3)  $T_{amb} = -55$  °C.

Fig.6 Transition frequency as a function of collector current; typical values.


## 40 V Low PNP Transistor

## PBSS5140U


### PACKAGE OUTLINE

Plastic surface mounted package

SOT-323

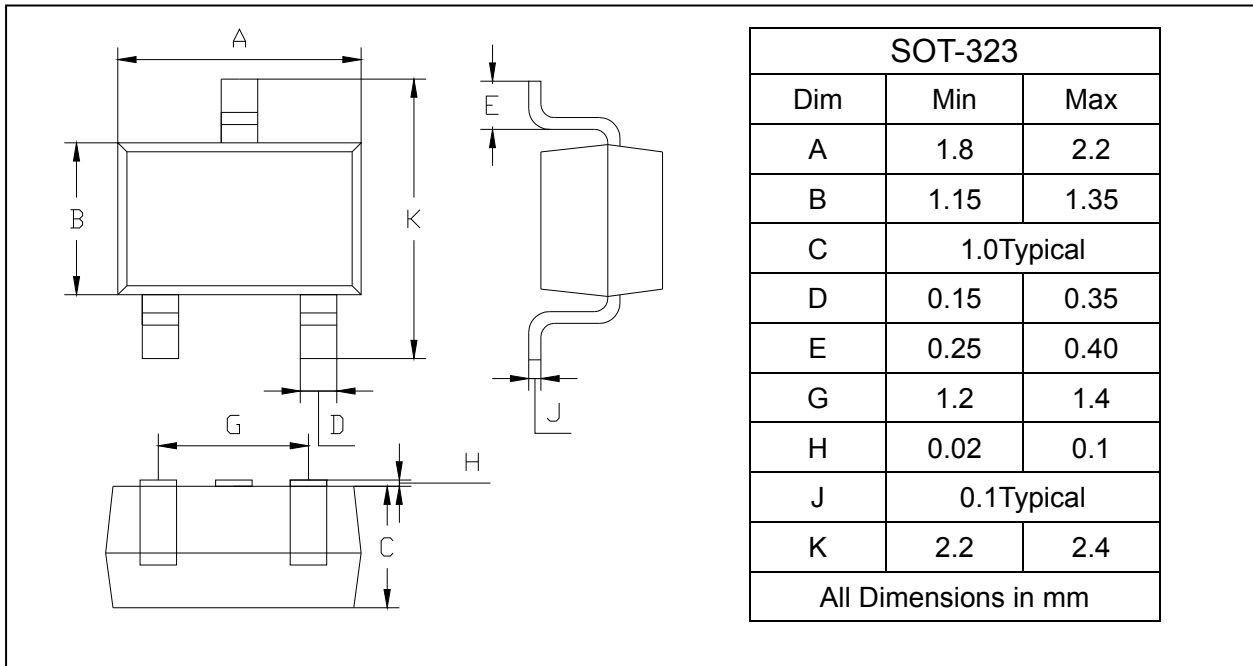

### SOLDERING FOOTPRINT

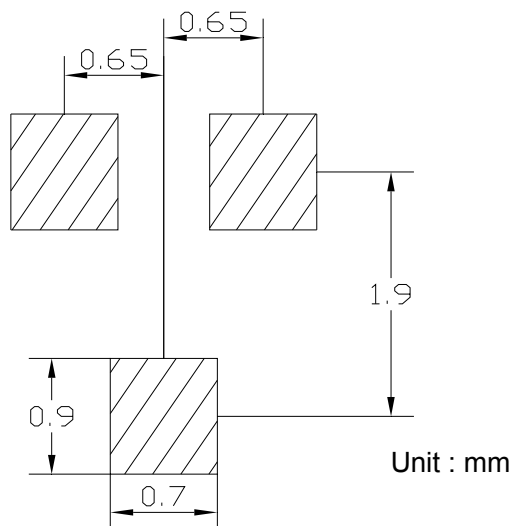

### PACKAGE INFORMATION

| Device    | Package | Shipping       |
|-----------|---------|----------------|
| PBSS5140U | SOT-323 | 3000/Tape&Reel |