


4. Pin Function Description


1. General Description

MDT7727 is a step-up DC/DC converter .
It has low start-up voltage and a high output voltage accuracy with low ripple.

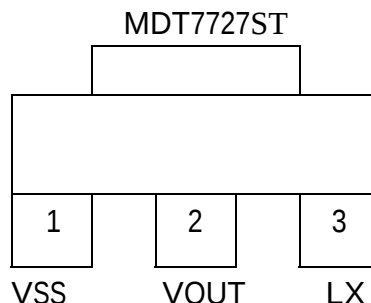

2. Features

- High output voltage accuracy : +/- 2.5%
- Low start-up voltage: 0.75V (Typ.)
- High efficiency: 85% (Typ.)

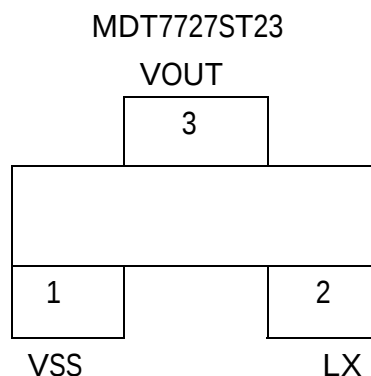

3. Applications

- Cellular phones, pagers, mcu
- Power failure detection
- Portable / Battery-Powered Equipment
- Palmtops
- RF Keyboard / Mouse

Pin Name	I/O	Function
VSS		Ground
LX	Open Drain	Switching pin
VOUT	Input	Output voltage monitor, IC internal power supply

ORDERING INFORMATION

Device	Package
MDT7727ST	SOT89
MDT7727ST23	SOT23

5. Electrical Characteristics

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Output Voltage	-----	2.6325	2.7	2.7675	V
Output Ripple	-----		±2.5	±3	%
V _{in}	-----			6	V
V _{start}	I _{out} =1mA		0.75	0.8	V
	I _{out} =30mA		1.1	1.2	V
V _{hold}	I _{out} =1mA	0.7			V
	I _{out} =30mA	1			V
I _{in}	Without loading		20	25	uA
Supply Current IDD1	V _{IN} =V _{OUT} × 0.95 Measured at VOUT pin without external component		45	52	uA
Supply Current IDD2	V _{IN} =V _{OUT} +0.5V Measured at VOUT pin without external component		8	12	uA
Shutdown Current	V _{CE} =0 , V _{IN} =V _{OUT} ×0.95			0.5	uA
LX Leakage Current	V _{IN} =6V			1	uA
Maximum Oscillator Frequency	V _{IN} =V _{OUT} 0.95 Measured at ETR pin		200	230	kHz
Oscillator Duty Cycle	V _{IN} =V _{OUT} _0.95 Measured at ETR pin	70	75	80	%
Efficiency	L , SD , CL etc. connected		85		%

+2.7V Output Type

V_{IN}=V_{OUT}×0.6 ; I_{OUT}=30mA ; T_a=25 (Unless otherwise specified)


Note:

" Supply current 1 " is the supply current while the oscillator is continuously oscillating. In actual operation the oscillator periodically operates. The current actually provided by an external V_{IN} source from VOUT pin.


" Supply current 2 " is the supply current while the oscillator stop oscillating. In actual operation the oscillator periodically operates. The current actually provided by an external V_{IN} source from VOUT pin

6.Application Circuit & Block Diagram


BLOCK DIAGRAM

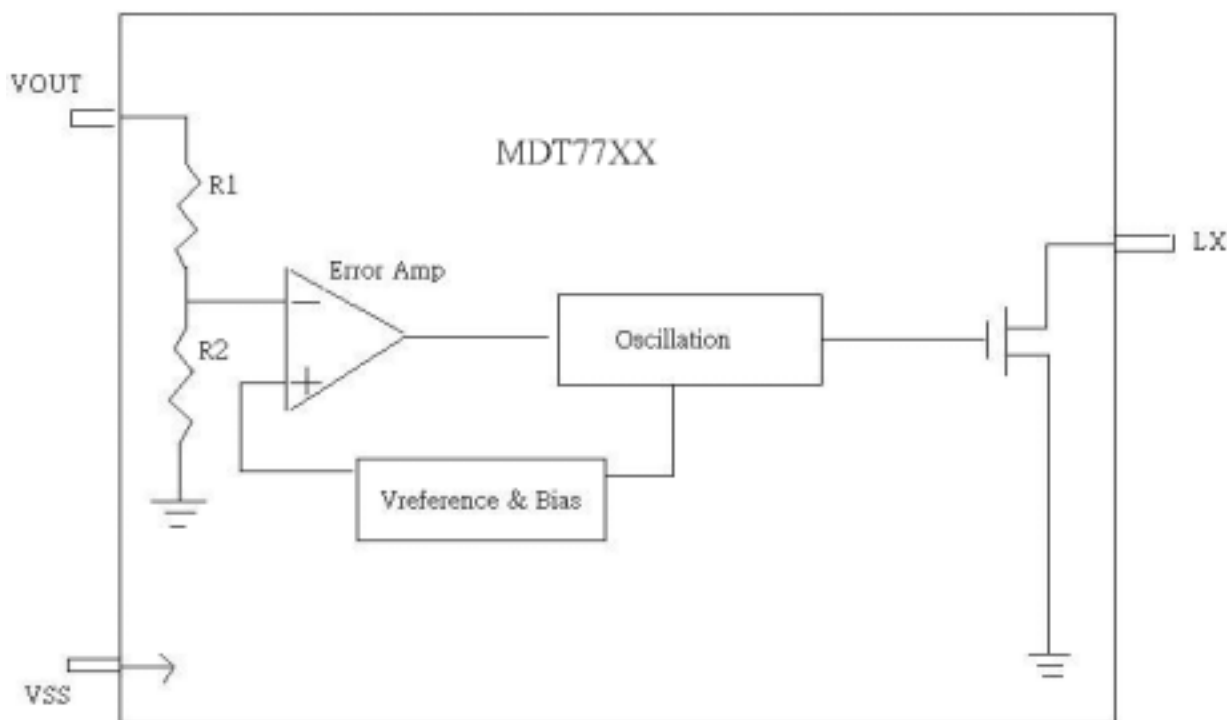

EXTERNAL COMPONENT : $C_{in}=100\mu F$; $C_L=100\mu F$; $C_b=0.1\mu F$
 $L=100\mu H$

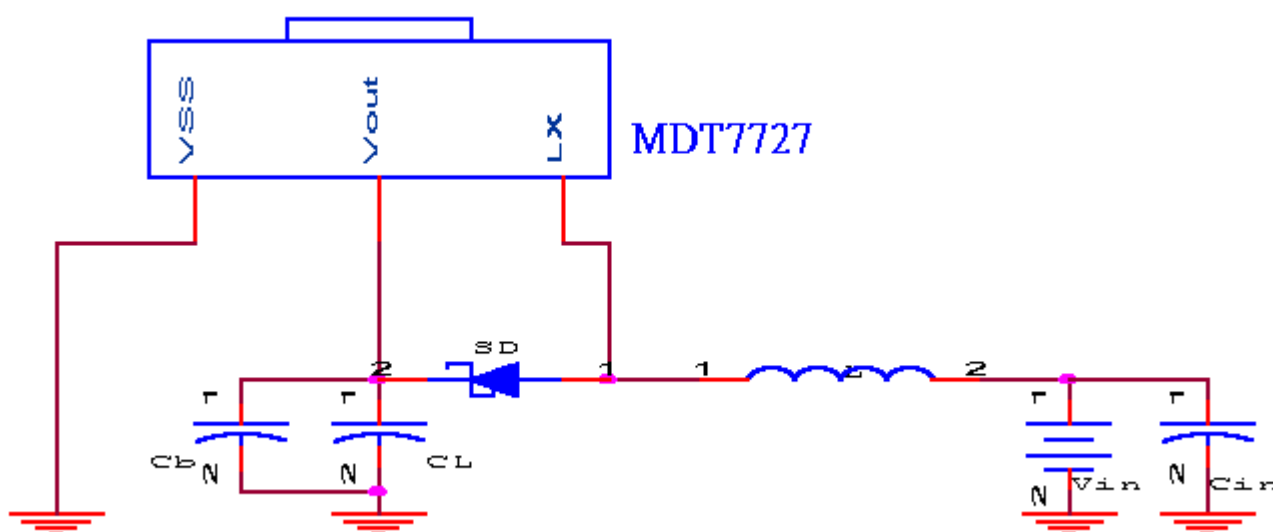

7. TYPICAL PERFORMANCE OF EFFICIENCY

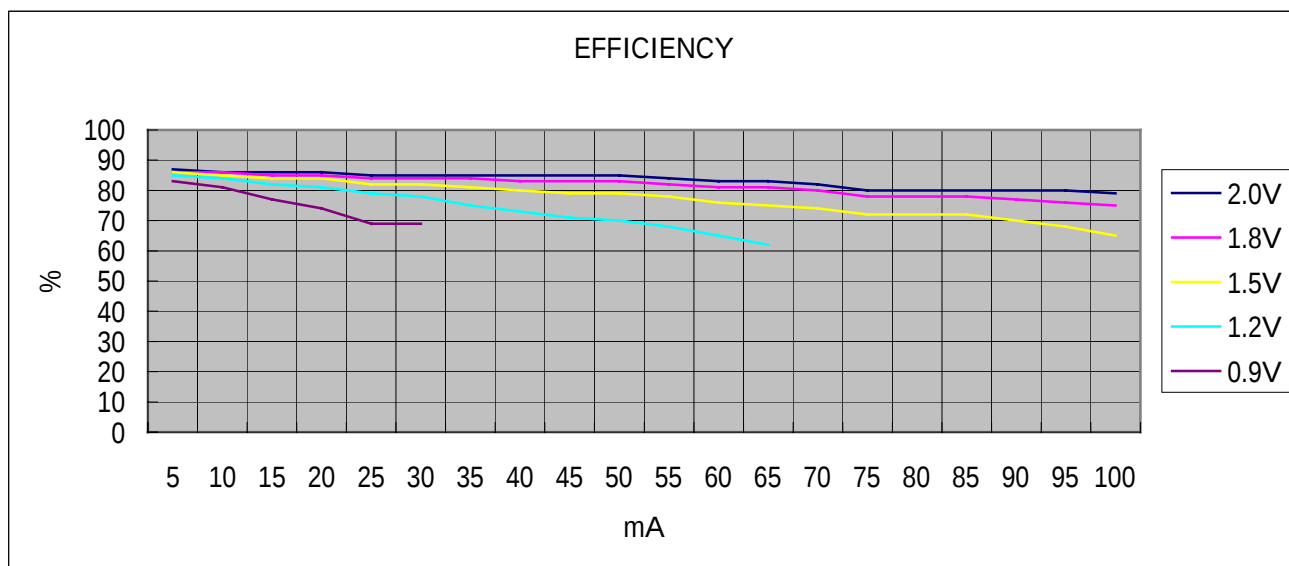

8. OUTPUT VOLTAGE V.S LOADING

