

Schottky barrier diode


RB495D

FEATURES

- Small mold type.
- Low I_R .
- High reliability.



Lead-free

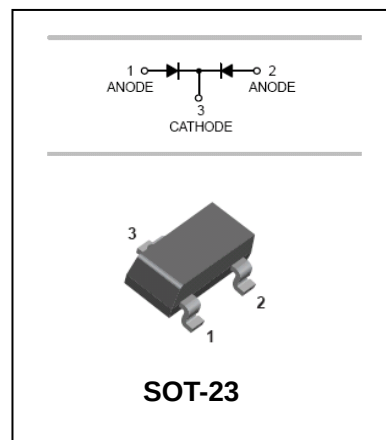

APPLICATIONS

- Schottky barrier diode.
- General rectification.

ORDERING INFORMATION

Type No.	Marking	Package Code
RB495D	D3Q	SOT-23

MAXIMUM RATING @ Ta=25°C unless otherwise specified

Characteristic	Symbol	Limits	Unit
Peak reverse voltage	V_{RM}	40	V
DC Reverse Voltage	V_R	25	V
Average rectified forward current(Note)	I_O	0.4	A
Peak forward Surge current	I_{FSM}	2	A
Operating Junction Temperature Range	T_j	125	°C
Storage Temperature Range	T_{STG}	-40 to +125	°C

Note: Rating of per diode: $I_O/2$.

ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified


Characteristic	Symbol	Min	MAX	UNIT	Test Condition
Forward Voltage	V_F		0.35 0.57	V	$I_F=10mA$ $I_F=200mA$
Reverse Leakage Current	I_R		70	μA	$V_R=25V$



Schottky barrier diode

RB495D

TYPICAL CHARACTERISTICS @ $T_a=25^\circ\text{C}$ unless otherwise specified

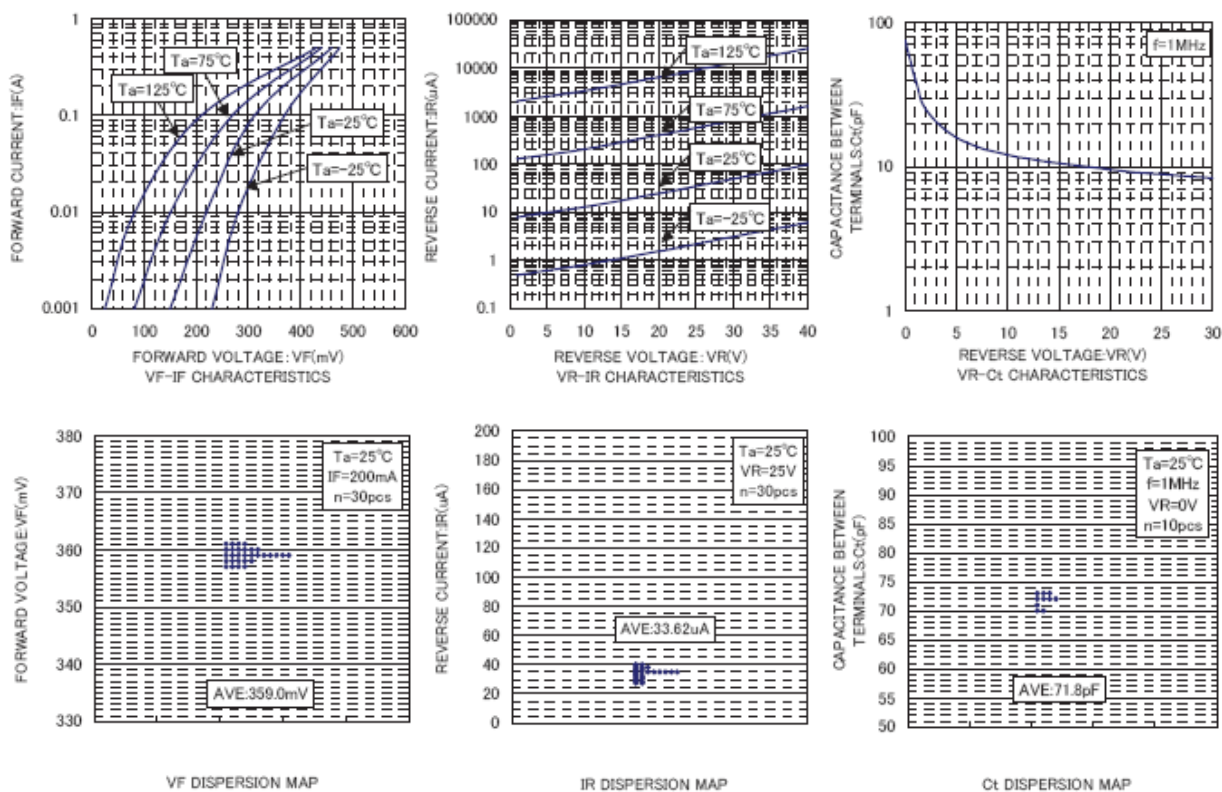


Schottky barrier diode

RB495D


PACKAGE OUTLINE

Plastic surface mounted package

SOT-23

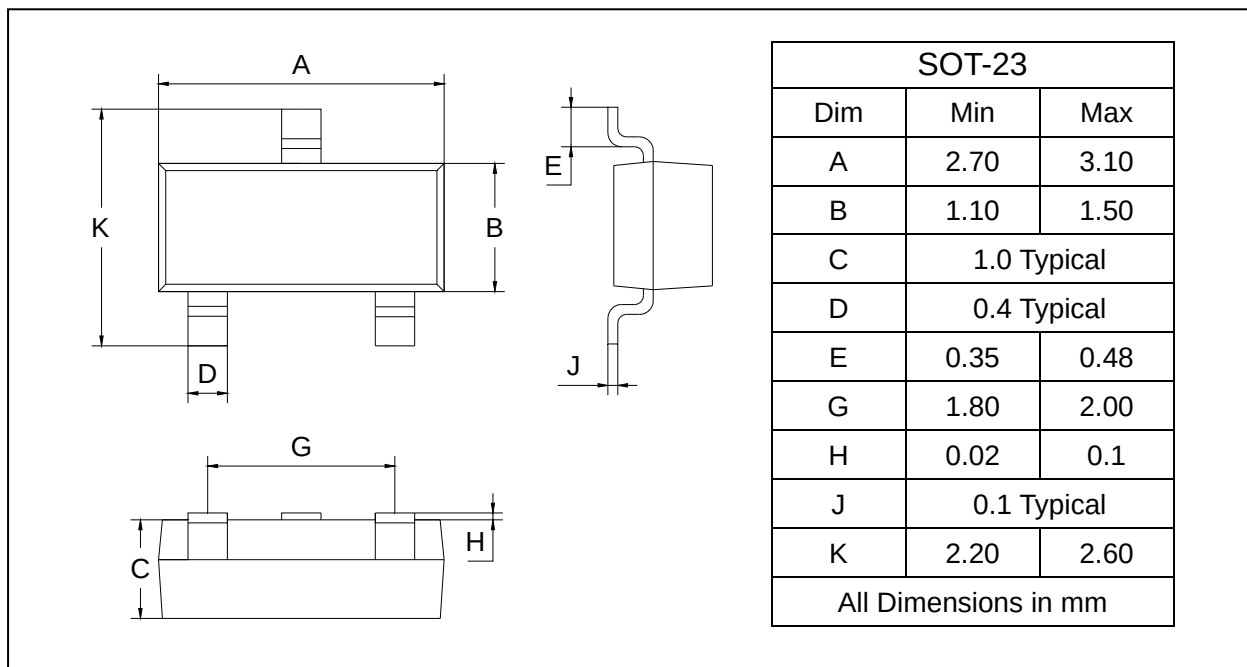

SOLDERING FOOTPRINT

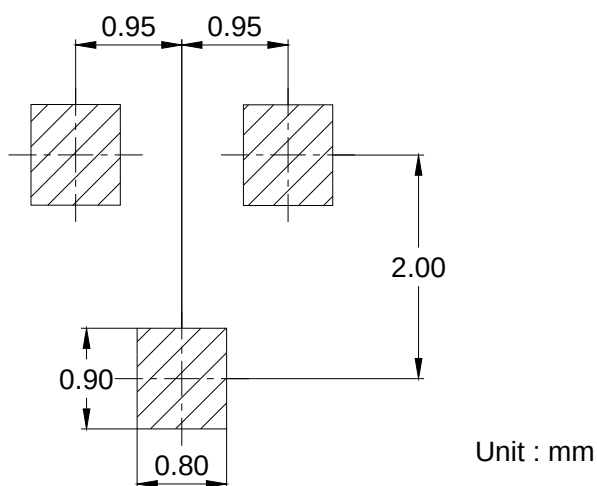

PACKAGE INFORMATION

Device	Package	Shipping
RB495D	SOT-23	3000/Tape&Reel