

## G\_S-1W & H\_S-1W Series

1W, FIXED INPUT, 6000V ISOLATED&UNREGULATED  
 DUAL/SINGLE OUTPUT DC-DC CONVERTER

multi-country patent protection **RoHS**

### FEATURES

- 6KVDC Isolation
- SIP Package
- Temperature Range: -40°C to +85°C
- No Heat sink Required
- Low Isolation Capacitance
- Internal SMD Construction
- Industry Standard Pinout
- RoHS Compliance

### APPLICATIONS


The G\_S-1W & H\_S-1W Series are specially designed for applications where a group of polar power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to:

- 1) Where the voltage of the input power supply is fixed (voltage variation  $\leq \pm 10\%$ );
- 2) Where isolation is necessary between input and output (isolation voltage  $\leq 6000\text{VDC}$ );
- 3) Where the regulation of the output voltage and the output ripple noise are not demanding.

Such as: purely digital circuits, ordinary low frequency analog circuits, and IGBT power device driving circuits.

### MODEL SELECTION

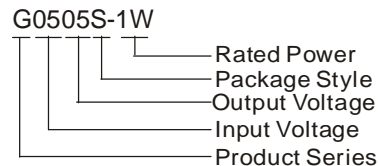

### MORNSUN Science & Technology co., Ltd.

Address: 2th floor 6th building, Hangzhou Industrial District, Guangzhou, China  
 Tel: 86-20-38601850  
 Fax: 86-20-38601272  
<http://www.mornsun-power.com>

### PRODUCT PROGRAM

Part Number	Input		Output			Efficiency (% Typ)		
	Voltage (VDC)		Voltage (VDC)	Current (mA)				
	Nominal	Range		Max	Min			
H0505S-1W	5	4.5-5.5	5	200	20	70		
H0509S-1W			9	111	12	72		
H0512S-1W			12	84	9	73		
H0515S-1W			15	67	7	74		
G0505S-1W			$\pm 5$	$\pm 100$	$\pm 10$	70		
G0509S-1W			$\pm 9$	$\pm 56$	$\pm 6$	72		
G0512S-1W			$\pm 12$	$\pm 42$	$\pm 5$	73		
G0515S-1W			$\pm 15$	$\pm 33$	$\pm 4$	75		
H1205S-1W			12	10.8-13.2	5	200	20	70
H1209S-1W					9	111	12	71
H1212S-1W	12	84			9	72		
H1215S-1W	15	67			7	74		
G1205S-1W	$\pm 5$	$\pm 100$			$\pm 10$	70		
G1209S-1W	$\pm 9$	$\pm 56$			$\pm 6$	71		
G1212S-1W	$\pm 12$	$\pm 42$			$\pm 5$	72		
G1215S-1W	$\pm 15$	$\pm 33$			$\pm 4$	75		

Note: G/H\_S-1W Series:UL-60950-1 Pending.

### ISOLATION SPECIFICATIONS

Item	Test Conditions	Min	Typ	Max	Units
Isolation voltage	Tested for 1 minute and 1mA max	6000			VDC
Isolation resistance	Test at 500VDC	1000			MΩ
Isolation capacitance				10	pF

### OUTPUT SPECIFICATIONS

Item	Test Conditions	Min	Typ	Max	Units
Output power		0.1		1	W
Line regulation	For Vin change of 1%			$\pm 1.2$	%
Load regulation	10% to 100% load (5V output)		12.8	15	%
	10% to 100% load (9V output)		8.3	15	
	10% to 100% load (12V output)		6.8	15	
	10% to 100% load (15V output)		6.3	15	
Output voltage accuracy	See tolerance envelope graph				
Temperature drift	100% full load			0.03	%/°C
Ripple & Noise*	20MHz Bandwidth		150	200	mVp-p
Switching frequency	Full load, nominal input	(5V input)	250		KHz
		(12V input)	50		

\*Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.

Note:



1. All specifications measured at TA=25°C, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
2. Dual output models unbalanced load:  $\pm 5\%$ .

## COMMON SPECIFICATIONS


Conditions	Min	Typ	Max	Units
Storage humidity range			95	%
Operating temperature	-40		85	°C
Storage temperature	-55		125	
Lead temperature	1.5mm from case for 10 seconds		300	
Temp. rise at full load		15	25	
Short circuit protection*	5V input voltage		1	second
	12V input voltage	Continuous		
Cooling	Free air convection			
Case material	Plastic(UL94-V0)			
MTBF	3500			K hours
Weigh		4.2		g

\*When input voltage (Nominal) is 5V, Supply voltage must be discontinued at the end of short circuit duration.

## TYPICAL CHARACTERISTICS

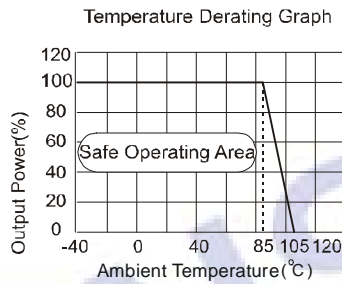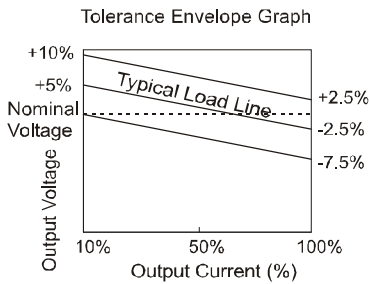


## OUTLINE DIMENSIONS & PIN CONNECTIONS

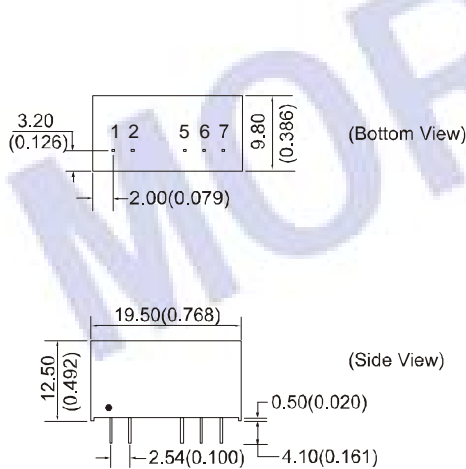

First Angle Projection

RECOMMENDED FOOTPRINT  
Top view, grid: 2.54mm (0.1 inch)  
diameter: 1.00mm (0.039 inch)



### FOOTPRINT DETAILS

Pin	Singles	Duals
1	Vin	Vin
2	GND	GND
5	0V	-Vo
6	No Pin	0V
7	+Vo	+Vo

Note:  
Unit:mm(inch)  
Pin section:0.50\*0.30mm(0.020\*0.012inch)  
Pin tolerances:±0.10mm(±0.004inch)  
General tolerances:±0.25mm(±0.010inch)


## APPLICATION NOTE

### Requirement on output load

To ensure this module can operate efficiently and reliably, During operation, the minimum output load is **not less than 10%** of the full load, and that **this product should never be operated under no load!** If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load, or use our company's products with a lower rated output power.

## Recommended testing and application circuit

If you want to further decrease the input/output ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, see (Figure 1).

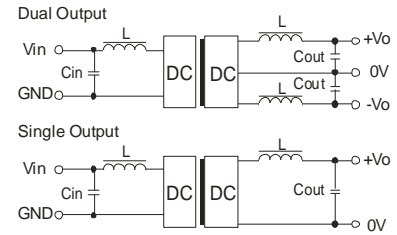

(Figure 1)

It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees (Table 1).


### EXTERNAL CAPACITOR TABLE (TABLE 1)

Vin (VDC)	Cin (uF)	Single Vout (VDC)	Cout (uF)	Dual Vout (VDC)	Cout (uF)
5	4.7	5	10	±5	4.7
12	2.2	9	4.7	±9	2.2
-	-	12	2.2	±12	2.2
-	-	15	1	±15	1

It's not recommended to connect any external capacitor in the application field with less than 0.5 watt output.

### Output Voltage Regulation and Over-voltage Protection Circuit

The simplest device for output voltage regulation, over-voltage and over-current protection is a linear voltage regulator with overheat protection that is connected to the input or output end in series (Figure 2).

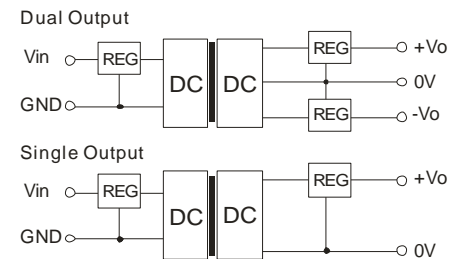

(Figure 2)

### Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against overload. The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.

**No parallel connection or plug and play.**