

Surface Mount Rectifiers

RS3AB--RS3MB

FEATURES

- Low profile package
- For surface mounted applications
- Built-in strain relief, ideal for automated placement
- Plastic package has underwriters, laborator flammability classification 94V-0
- High temperature soldering: 250°C/10 seconds at terminals



Lead-free



MECHANICAL DATA

- Case :JEDEC SMB, molded plastic over passivated chip
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: color band denotes cathode end
- Weight: 0.003 ounces, 0.093 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

		RS3AB	RS3BB	RS3DB	RS3GB	RS3JB	RS3KB	RS3MB	UNITS
Making code		RS3AB	RS3BB	RS3DB	RS3GB	RS3JB	RS3KB	RS3MB	
Maximum recurrent peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current T _L =90°C	I _{F(AV)}	3.0							A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load	I _{FSM}	100							A
Maximum instantaneous forward voltage at 3.0 A	V _F	1.30							V
Maximum reverse current @T _A =25°C at rated DC blocking voltage @T _A =125°C	I _R	5.0 200							μ A
Typical reverse recovery time (Note1)	t _{rr}	150				250	500		ns
Typical junction capacitance (Note2)	C _J	32							p F
Typical thermal resistance (Note3)	R _{ΘJA}	40.0							°C/W
Operating junction and storage temperature range	T _J T _{STG}	- 55 ----- + 150							°C

NOTE: 1.Reverse recovery time test conditions: I_F=0.5A, I_R=1.0A, I_{rr}=0.25A


2. Measured at 1.0MHz and applied reverse voltage of 4.0 Volts

3. Thermal resistance from junction to ambient and junction to lead P.C.B. mounted on 0.2"X0.2"(5.0X5.0mm²) copper pad areas


Surface Mount Rectifiers

RS3AB--RS3MB

PACKAGE OUTLINE DIMENSIONS

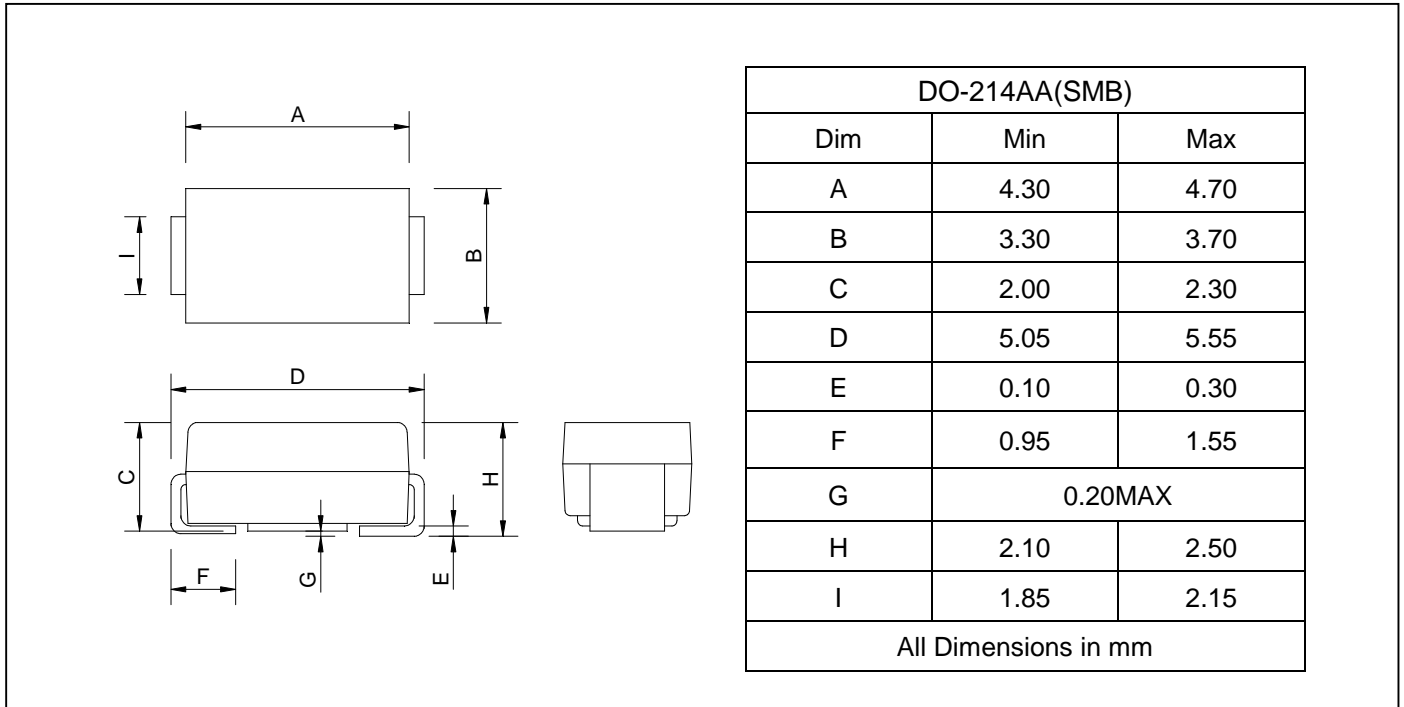

SOLDERING FOOTPRINT

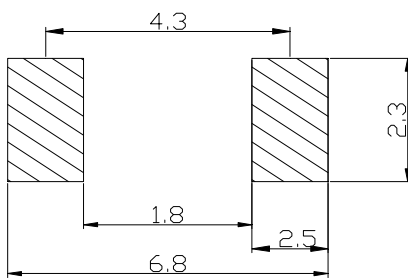

Unit : mm

PACKAGE INFORMATION

Device	Package	Shipping
RS3AB--RS3MB	DO-214AA(SMB)	3000/Tape&Reel

Surface Mount Rectifiers

RS3AB--RS3MB

FIG.1 -- FORWARD DERATING CURVE

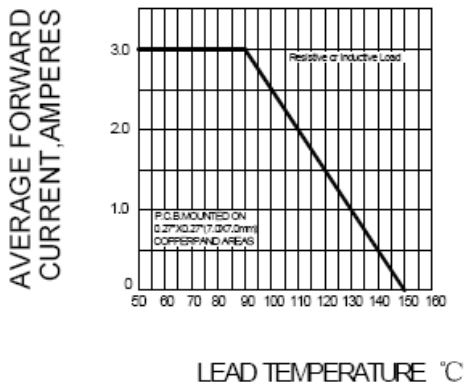


FIG.2 PEAK FORWARD SURGE CURRENT

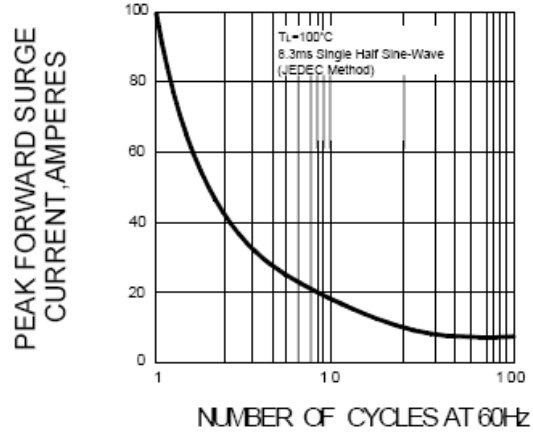


FIG.3 -- TYPICAL FORWARD CHARACTERISTICS

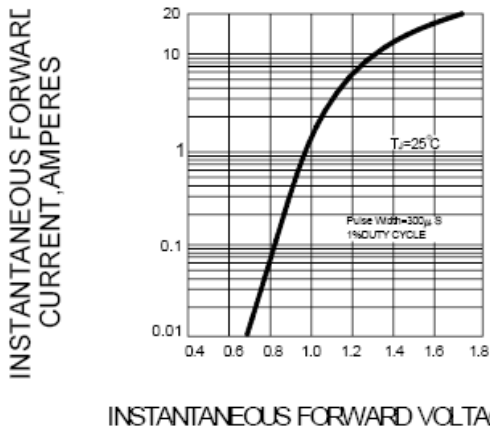


FIG.4 -- TYPICAL REVERSE CHARACTERISTICS

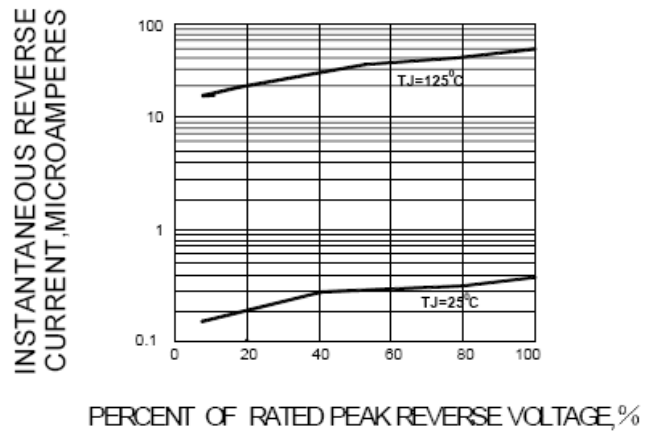


FIG.5-TYPICAL JUNCTION CAPACITANCE

