

*ASSP for Power Supply Applications (Secondary battery)*

# DC/DC Converter IC for Charging Li-ion Battery

## MB39A125/126

### ■ DESCRIPTION

MB39A125/126 is a DC/DC converter IC for charging Li-ion battery, which is suitable for down-conversion, and uses pulse width modulation (PWM) for controlling the output voltage and current independently. This IC integrates the built-in comparator for the voltage detection of the AC adapter, and selects the AC adapter or battery automatically for power supply to the system.

Provides a wide range of power supply voltage, low standby current, and high efficiency, which makes them ideal as a built-in charging device in products such as notebook PC.


### ■ FEATURES

- High efficiency : 97% (MAX)
- Built-in two constant current control circuits
- Analog control of the charging current value (+INE1, +INE2 terminal)
- Built-in AC adapter voltage detection function (ACOK, XACOK terminal)

(Continued)


### ■ PACKAGES

24-pin plastic SSOP



(FPT-24P-M03)

28-pin plastic QFN



(LCC-28P-M11)

# MB39A125/126


[查询"MB39A125"供应商](#)

(Continued)

- External output voltage setting resistor : MB39A125
- Built-in output voltage setting resistor : MB39A126
- Built-in charge stop function at low VCC
- Output voltage setting accuracy :  $\pm 0.74\%$  ( $T_a = -10\text{ }^{\circ}\text{C}$  to  $+85\text{ }^{\circ}\text{C}$ ) : MB39A125  
:  $12.6\text{ V}/16.8\text{ V} \pm 0.8\%$  ( $T_a = -10\text{ }^{\circ}\text{C}$  to  $+85\text{ }^{\circ}\text{C}$ ) : MB39A126
- Built-in high accuracy current detection amplifier ( $\pm 5\%$ ) (At input voltage difference 100 mV) ,  
( $\pm 15\%$ ) (At input voltage difference 20 mV)
- In IC standby mode ( $I_{cc} = 0\text{ }\mu\text{A}$  Typ) , make output voltage setting resistor open to prevent inefficient current loss
- Built-in soft-start circuit
- Standby current :  $0\text{ }\mu\text{A}$  (Typ)
- Totem-pole type output for Pch MOS FET

PIN ASSIGNMENTS

MB39A125

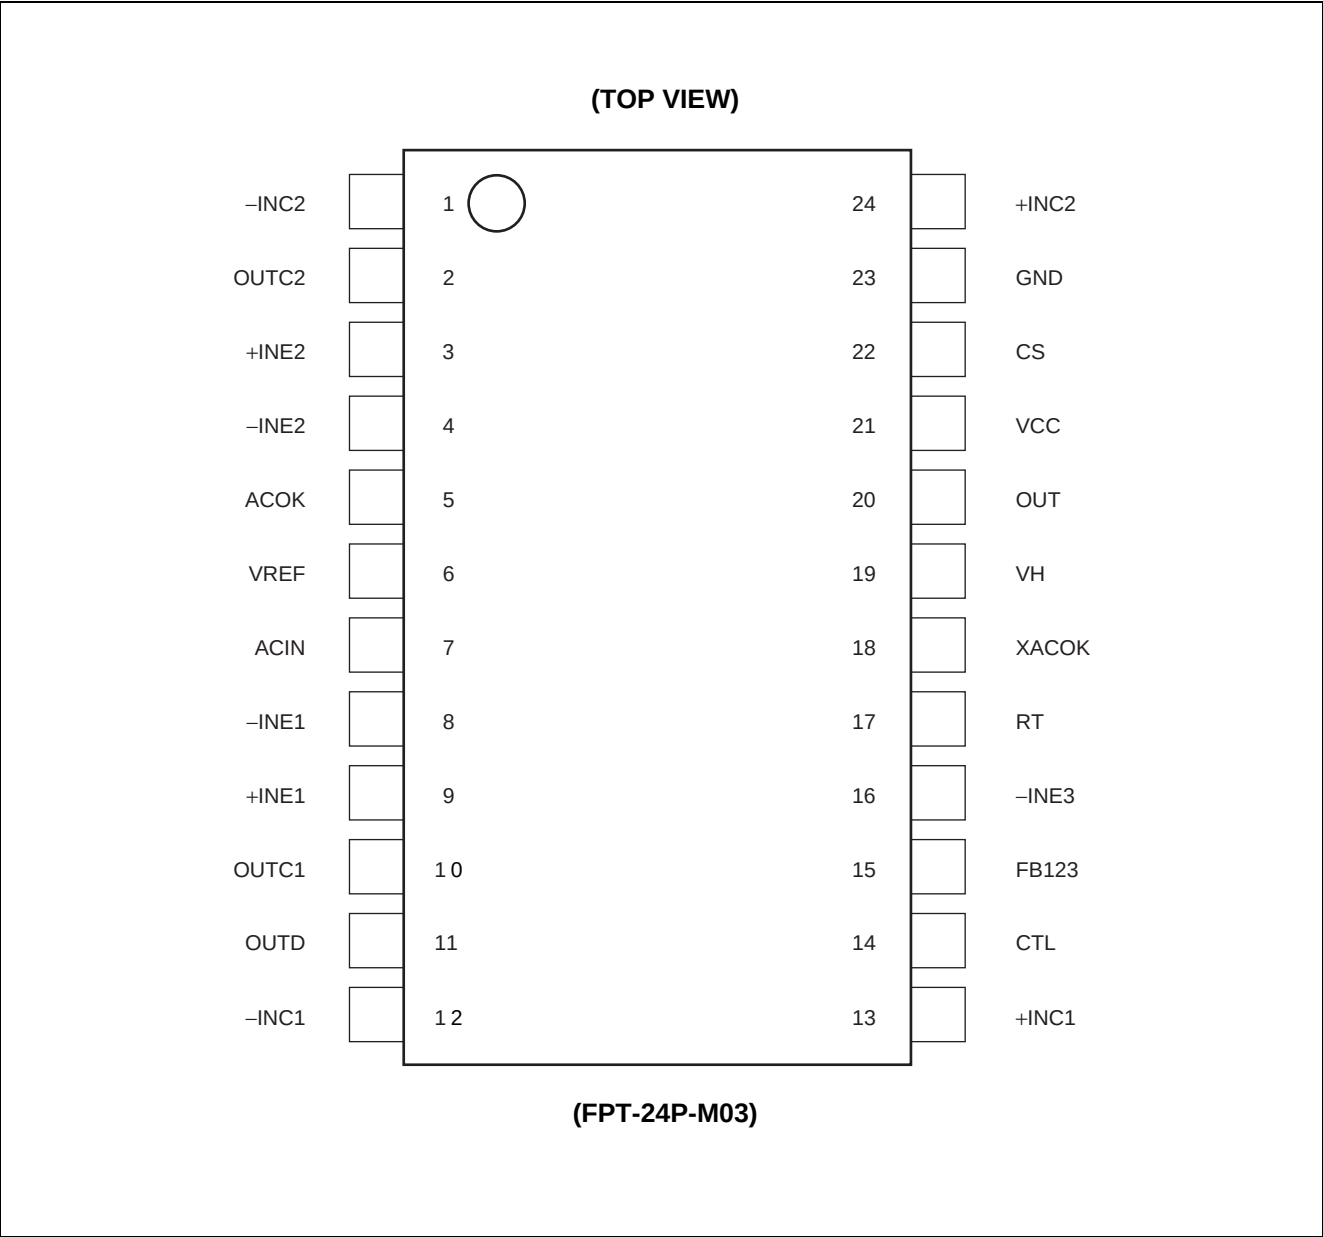


(Continued)

# MB39A125/126

[查询"MB39A125"供应商](#)


(Continued)

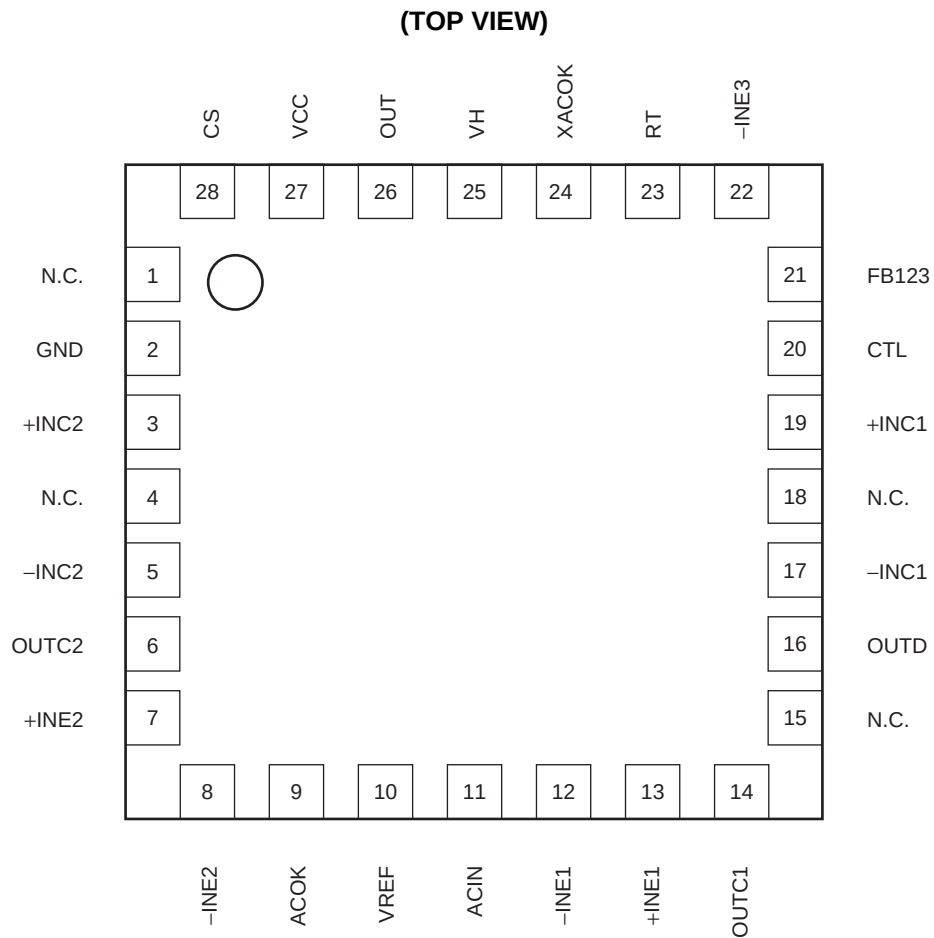

**(LCC-28P-M11)**

Note : Connect IC's radiation board at bottom side to potential of GND.

• MB39A126

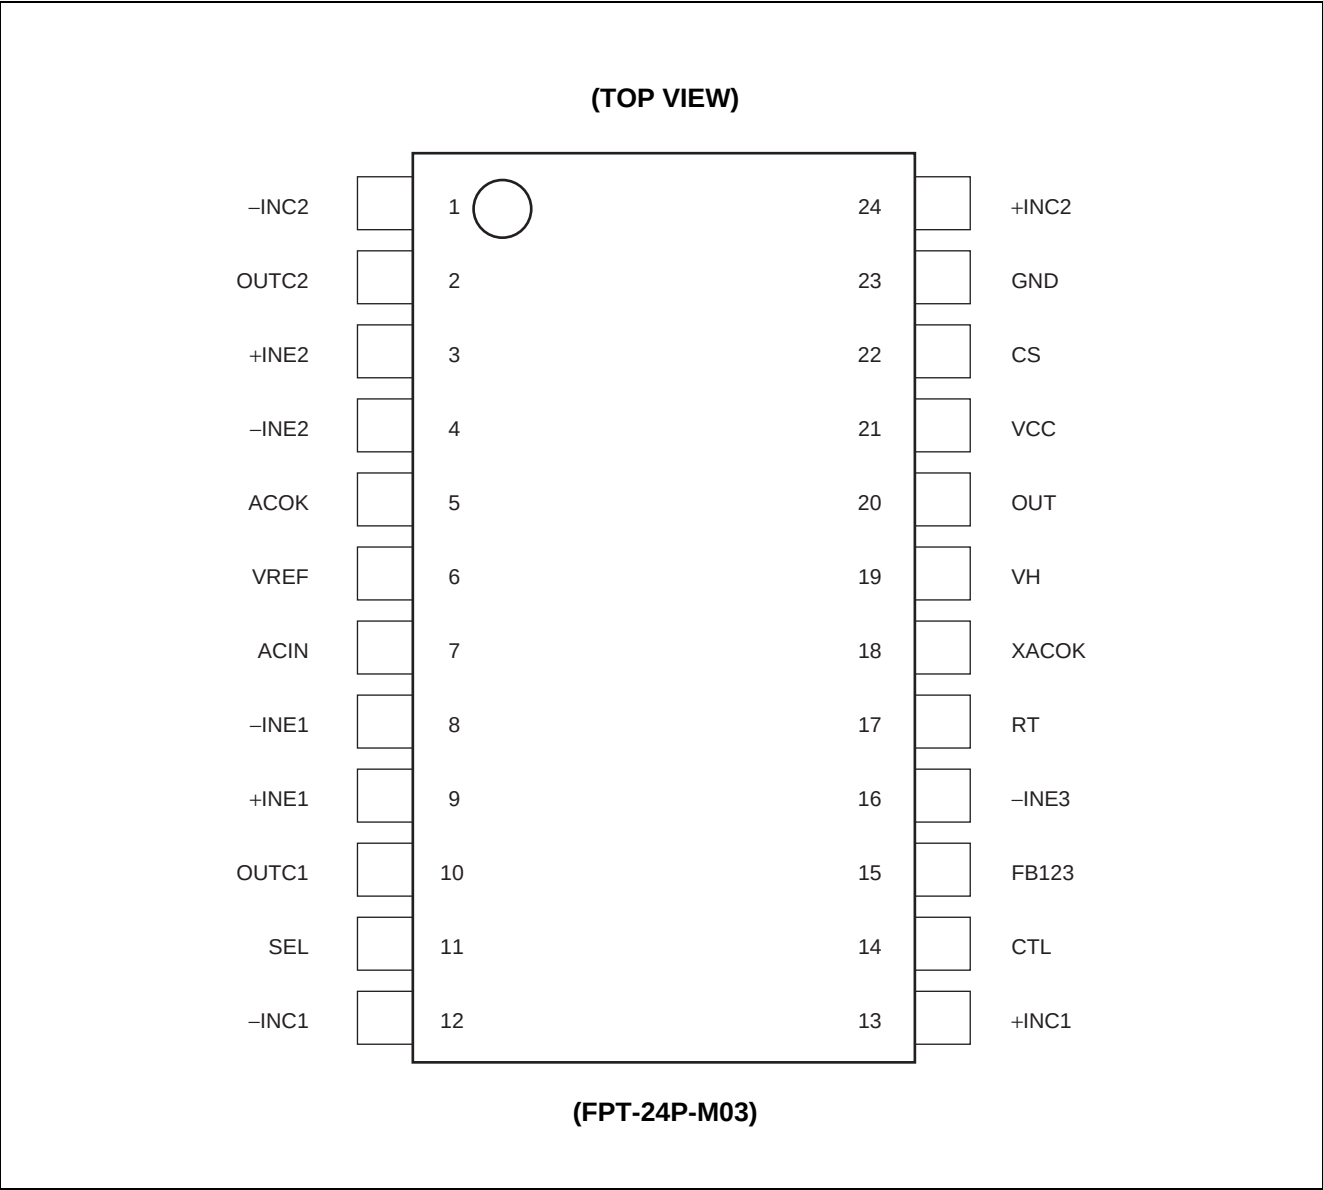


(Continued)

# MB39A125/126

[查询"MB39A125"供应商](#)

(Continued)

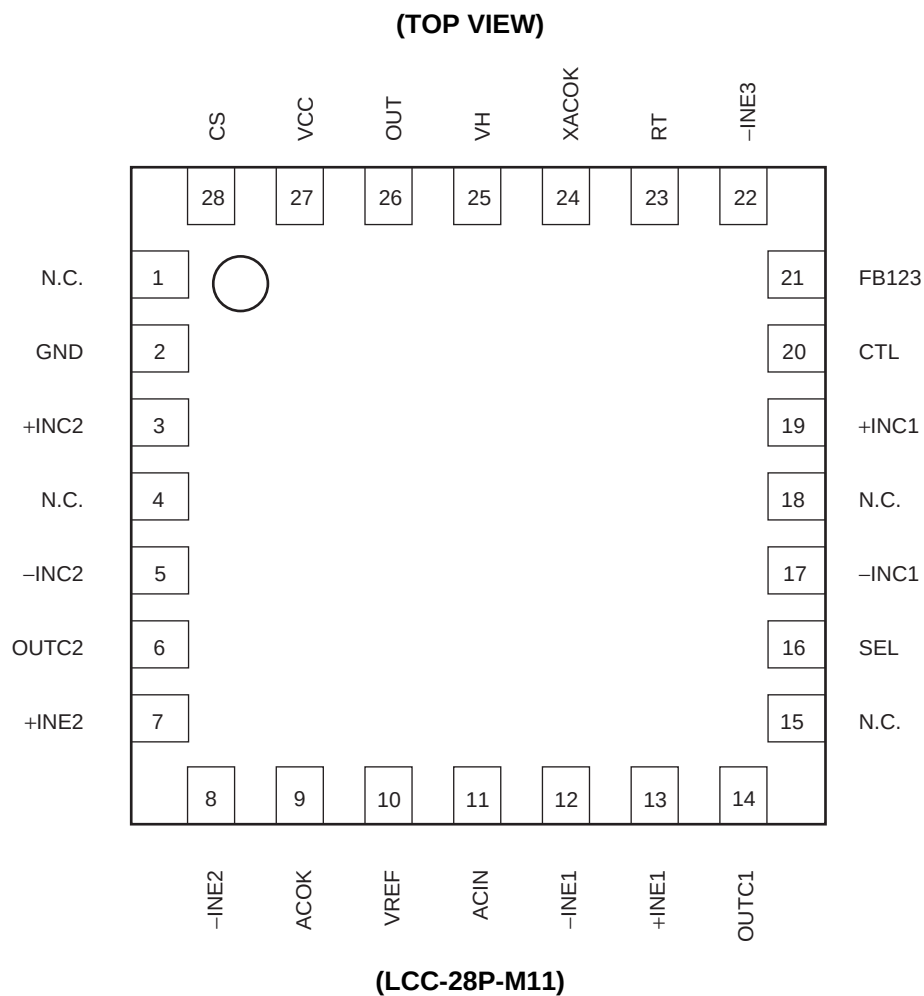

Note : Connect IC's radiation board at bottom side to potential of GND.

## ■ PIN DESCRIPTIONS

### • MB39A125 : SSOP-24

| Pin No. | Pin Name | I/O | Description                                                                                                                                                                                    |
|---------|----------|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1       | –INC2    | I   | Current detection amplifier (Current Amp2) inverted input terminal                                                                                                                             |
| 2       | OUTC2    | O   | Current detection amplifier (Current Amp2) output terminal                                                                                                                                     |
| 3       | +INE2    | I   | Error amplifier (Error Amp2) non-inverted input terminal                                                                                                                                       |
| 4       | –INE2    | I   | Error amplifier (Error Amp2) inverted input terminal                                                                                                                                           |
| 5       | ACOK     | O   | AC adapter voltage detection block (AC Comp.) output terminal<br>ACOK = L when ACIN = H, ACOK = Hi-Z when ACIN = L,<br>ACOK = Hi-Z when CTL = L                                                |
| 6       | VREF     | O   | Reference voltage output terminal                                                                                                                                                              |
| 7       | ACIN     | I   | AC adapter voltage detection block (AC Comp.) input terminal                                                                                                                                   |
| 8       | –INE1    | I   | Error amplifier (Error Amp1) inverted input terminal                                                                                                                                           |
| 9       | +INE1    | I   | Error amplifier (Error Amp1) non-inverted input terminal                                                                                                                                       |
| 10      | OUTC1    | O   | Current detection amplifier (Current Amp1) output terminal                                                                                                                                     |
| 11      | OUTD     | O   | When IC is standby mode, this terminal is set to “Hi-Z” to prevent loss of inefficient current through the output voltage setting resistor. Set CTL terminal to “H” level to output “L” level. |
| 12      | –INC1    | I   | Current detection amplifier (Current Amp1) inverted input terminal                                                                                                                             |
| 13      | +INC1    | I   | Current detection amplifier (Current Amp1) non-inverted input terminal                                                                                                                         |
| 14      | CTL      | I   | Power supply control terminal<br>Setting the CTL terminal at “L” level places the IC in the standby mode.                                                                                      |
| 15      | FB123    | O   | Error amplifier (Error Amp1, 2, 3) output terminal                                                                                                                                             |
| 16      | –INE3    | I   | Error amplifier (Error Amp3) inverted input terminal                                                                                                                                           |
| 17      | RT       | —   | Triangular wave oscillation frequency setting resistor connection terminal                                                                                                                     |
| 18      | XACOK    | O   | AC adapter voltage detection block ( AC Comp.) output terminal<br>XACOK = Hi-Z when ACIN = H, XACOK = L when ACIN = L,<br>XACOK = Hi-Z when CTL = L                                            |
| 19      | VH       | O   | Power supply terminal for FET drive circuit (VH = VCC – 6 V)                                                                                                                                   |
| 20      | OUT      | O   | External FET gate drive terminal                                                                                                                                                               |
| 21      | VCC      | —   | Power supply terminal for reference voltage, control circuit, and output circuit                                                                                                               |
| 22      | CS       | —   | Soft-start setting capacitor connection terminal                                                                                                                                               |
| 23      | GND      | —   | Ground terminal                                                                                                                                                                                |
| 24      | +INC2    | I   | Current detection amplifier (Current Amp2) non-inverted input terminal                                                                                                                         |

# MB39A125/126

[查询“MB39A125”供应商](#)

## • MB39A125 : QFN-28

| Pin No. | Pin Name | I/O | Description                                                                                                                                                                                       |
|---------|----------|-----|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1       | N.C.     | —   | No connection                                                                                                                                                                                     |
| 2       | GND      | —   | Ground terminal                                                                                                                                                                                   |
| 3       | +INC2    | I   | Current detection amplifier (Current Amp2) non-inverted input terminal                                                                                                                            |
| 4       | N.C.     | —   | No connection                                                                                                                                                                                     |
| 5       | –INC2    | I   | Current detection amplifier (Current Amp2) inverted input terminal                                                                                                                                |
| 6       | OUTC2    | O   | Current detection amplifier (Current Amp2) output terminal                                                                                                                                        |
| 7       | +INE2    | I   | Error amplifier (Error Amp2) non-inverted input terminal                                                                                                                                          |
| 8       | –INE2    | I   | Error amplifier (Error Amp2) inverted input terminal                                                                                                                                              |
| 9       | ACOK     | O   | AC adapter voltage detection block (AC Comp.) output terminal<br>ACOK = L when ACIN = H, ACOK = Hi-Z when ACIN = L,<br>ACOK = Hi-Z when CTL = L                                                   |
| 10      | VREF     | O   | Reference voltage output terminal                                                                                                                                                                 |
| 11      | ACIN     | I   | AC adapter voltage detection block (AC Comp.) input terminal                                                                                                                                      |
| 12      | –INE1    | I   | Error amplifier (Error Amp1) inverted input terminal                                                                                                                                              |
| 13      | +INE1    | I   | Error amplifier (Error Amp1) non-inverted input terminal                                                                                                                                          |
| 14      | OUTC1    | O   | Current detection amplifier (Current Amp1) output terminal                                                                                                                                        |
| 15      | N.C.     | —   | No connection                                                                                                                                                                                     |
| 16      | OUTD     | O   | When IC is standby mode, this terminal is set to “Hi-Z” to prevent loss of inefficient current through the output voltage setting resistor.<br>Set CTL terminal to “H” level to output “L” level. |
| 17      | –INC1    | I   | Current detection amplifier (Current Amp1) inverted input terminal                                                                                                                                |
| 18      | N.C.     | —   | No connection                                                                                                                                                                                     |
| 19      | +INC1    | I   | Current detection amplifier (Current Amp1) non-inverted input terminal                                                                                                                            |
| 20      | CTL      | I   | Power supply control terminal<br>Setting the CTL terminal at “L” level places the IC in the standby mode.                                                                                         |
| 21      | FB123    | O   | Error amplifier (Error Amp1, 2, 3) output terminal                                                                                                                                                |
| 22      | –INE3    | I   | Error amplifier (Error Amp3) inverted input terminal                                                                                                                                              |
| 23      | RT       | —   | Triangular wave oscillation frequency setting resistor connection terminal                                                                                                                        |
| 24      | XACOK    | O   | AC adapter voltage detection block ( AC Comp.) output terminal<br>XACOK = Hi-Z when ACIN = H, XACOK = L when ACIN = L,<br>XACOK = Hi-Z when CTL = L                                               |
| 25      | VH       | O   | Power supply terminal for FET drive circuit (VH = VCC - 6 V)                                                                                                                                      |
| 26      | OUT      | O   | External FET gate drive terminal                                                                                                                                                                  |
| 27      | VCC      | —   | Power supply terminal for reference voltage, control circuit, and output circuit                                                                                                                  |
| 28      | CS       | —   | Soft-start setting capacitor connection terminal                                                                                                                                                  |



## • MB39A126 : SSOP-24

| Pin No. | Pin Name | I/O | Description                                                                                                                                                                                     |
|---------|----------|-----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1       | -INC2    | I   | Current detection amplifier (Current Amp2) inverted input terminal                                                                                                                              |
| 2       | OUTC2    | O   | Current detection amplifier (Current Amp2) output terminal                                                                                                                                      |
| 3       | +INE2    | I   | Error amplifier (Error Amp2) non-inverted input terminal                                                                                                                                        |
| 4       | -INE2    | I   | Error amplifier (Error Amp2) inverted input terminal                                                                                                                                            |
| 5       | ACOK     | O   | AC adapter voltage detection block (AC Comp.) output terminal<br>ACOK = L when ACIN = H, ACOK = Hi-Z when ACIN = L,<br>ACOK = Hi-Z when CTL = L                                                 |
| 6       | VREF     | O   | Reference voltage output terminal                                                                                                                                                               |
| 7       | ACIN     | I   | AC adapter voltage detection block (AC Comp.) input terminal                                                                                                                                    |
| 8       | -INE1    | I   | Error amplifier (Error Amp1) inverted input terminal                                                                                                                                            |
| 9       | +INE1    | I   | Error amplifier (Error Amp1) non-inverted input terminal                                                                                                                                        |
| 10      | OUTC1    | O   | Current detection amplifier (Current Amp1) output terminal                                                                                                                                      |
| 11      | SEL      | I   | Charge voltage setting switch terminal (3cells or 4cells)<br>SEL terminal "H" level : Charge voltage setting 16.8 V (4cells)<br>SEL terminal "L" level : Charge voltage setting 12.6 V (3cells) |
| 12      | -INC1    | I   | Current detection amplifier (Current Amp1) inverted input terminal                                                                                                                              |
| 13      | +INC1    | I   | Current detection amplifier (Current Amp1) non-inverted input terminal                                                                                                                          |
| 14      | CTL      | I   | Power supply control terminal<br>Setting the CTL terminal at "L" level places the IC in the standby mode.                                                                                       |
| 15      | FB123    | O   | Error amplifier (Error Amp1, 2, 3) output terminal                                                                                                                                              |
| 16      | -INE3    | I   | Error amplifier (Error Amp3) inverted input terminal                                                                                                                                            |
| 17      | RT       | —   | Triangular wave oscillation frequency setting resistor connection terminal                                                                                                                      |
| 18      | XACOK    | O   | AC adapter voltage detection block ( AC Comp.) output terminal<br>XACOK = Hi-Z when ACIN = H, XACOK = L when ACIN = L,<br>XACOK = Hi-Z when CTL = L                                             |
| 19      | VH       | O   | Power supply terminal for FET drive circuit (VH = VCC - 6 V)                                                                                                                                    |
| 20      | OUT      | O   | External FET gate drive terminal                                                                                                                                                                |
| 21      | VCC      | —   | Power supply terminal for reference voltage, control circuit, and output circuit                                                                                                                |
| 22      | CS       | —   | Soft-start setting capacitor connection terminal                                                                                                                                                |
| 23      | GND      | —   | Ground terminal                                                                                                                                                                                 |
| 24      | +INC2    | I   | Current detection amplifier (Current Amp2) non-inverted input terminal                                                                                                                          |

# MB39A125/126


[查询“MB39A125”供应商](#)

## • MB39A126 : QFN-28

| Pin No. | Pin Name | I/O | Description                                                                                                                                                                                       |
|---------|----------|-----|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1       | N.C.     | —   | No connection                                                                                                                                                                                     |
| 2       | GND      | —   | Ground terminal                                                                                                                                                                                   |
| 3       | +INC2    | I   | Current detection amplifier (Current Amp2) non-inverted input terminal                                                                                                                            |
| 4       | N.C.     | —   | No connection                                                                                                                                                                                     |
| 5       | –INC2    | I   | Current detection amplifier (Current Amp2) inverted input terminal                                                                                                                                |
| 6       | OUTC2    | O   | Current detection amplifier (Current Amp2) output terminal                                                                                                                                        |
| 7       | +INE2    | I   | Error amplifier (Error Amp2) non-inverted input terminal                                                                                                                                          |
| 8       | –INE2    | I   | Error amplifier (Error Amp2) inverted input terminal                                                                                                                                              |
| 9       | ACOK     | O   | AC adapter voltage detection block (AC Comp.) output terminal<br>ACOK = L when ACIN = H, ACOK = Hi-Z when ACIN = L,<br>ACOK = Hi-Z when CTL = L                                                   |
| 10      | VREF     | O   | Reference voltage output terminal                                                                                                                                                                 |
| 11      | ACIN     | I   | AC adapter voltage detection block (AC Comp.) input terminal                                                                                                                                      |
| 12      | –INE1    | I   | Error amplifier (Error Amp1) inverted input terminal                                                                                                                                              |
| 13      | +INE1    | I   | Error amplifier (Error Amp1) non-inverted input terminal                                                                                                                                          |
| 14      | OUTC1    | O   | Current detection amplifier (Current Amp1) output terminal                                                                                                                                        |
| 15      | N.C.     | —   | No connection                                                                                                                                                                                     |
| 16      | SEL      | I   | Charge voltage setting switch terminal (3cells or 4cells) .<br>SEL terminal “H” level : Charge voltage setting 16.8 V (4cells)<br>SEL terminal “L” level : Charge voltage setting 12.6 V (3cells) |
| 17      | –INC1    | I   | Current detection amplifier (Current Amp1) inverted input terminal                                                                                                                                |
| 18      | N.C.     | —   | No connection                                                                                                                                                                                     |
| 19      | +INC1    | I   | Current detection amplifier (Current Amp1) non-inverted input terminal                                                                                                                            |
| 20      | CTL      | I   | Power supply control terminal<br>Setting the CTL terminal at “L” level places the IC in the standby mode.                                                                                         |
| 21      | FB123    | O   | Error amplifier (Error Amp1, 2, 3) output terminal                                                                                                                                                |
| 22      | –INE3    | I   | Error amplifier (Error Amp3) inverted input terminal                                                                                                                                              |
| 23      | RT       | —   | Triangular wave oscillation frequency setting resistor connection terminal                                                                                                                        |
| 24      | XACOK    | O   | AC adapter voltage detection block ( AC Comp.) output terminal<br>XACOK = Hi-Z when ACIN = H, XACOK = L when ACIN = L,<br>XACOK = Hi-Z when CTL = L                                               |
| 25      | VH       | O   | Power supply terminal for FET drive circuit (VH = VCC - 6 V)                                                                                                                                      |
| 26      | OUT      | O   | External FET gate drive terminal                                                                                                                                                                  |
| 27      | VCC      | —   | Power supply terminal for reference voltage, control circuit, and output circuit                                                                                                                  |
| 28      | CS       | —   | Soft-start setting capacitor connection terminal                                                                                                                                                  |

## ■ BLOCK DIAGRAMS


### • MB39A125

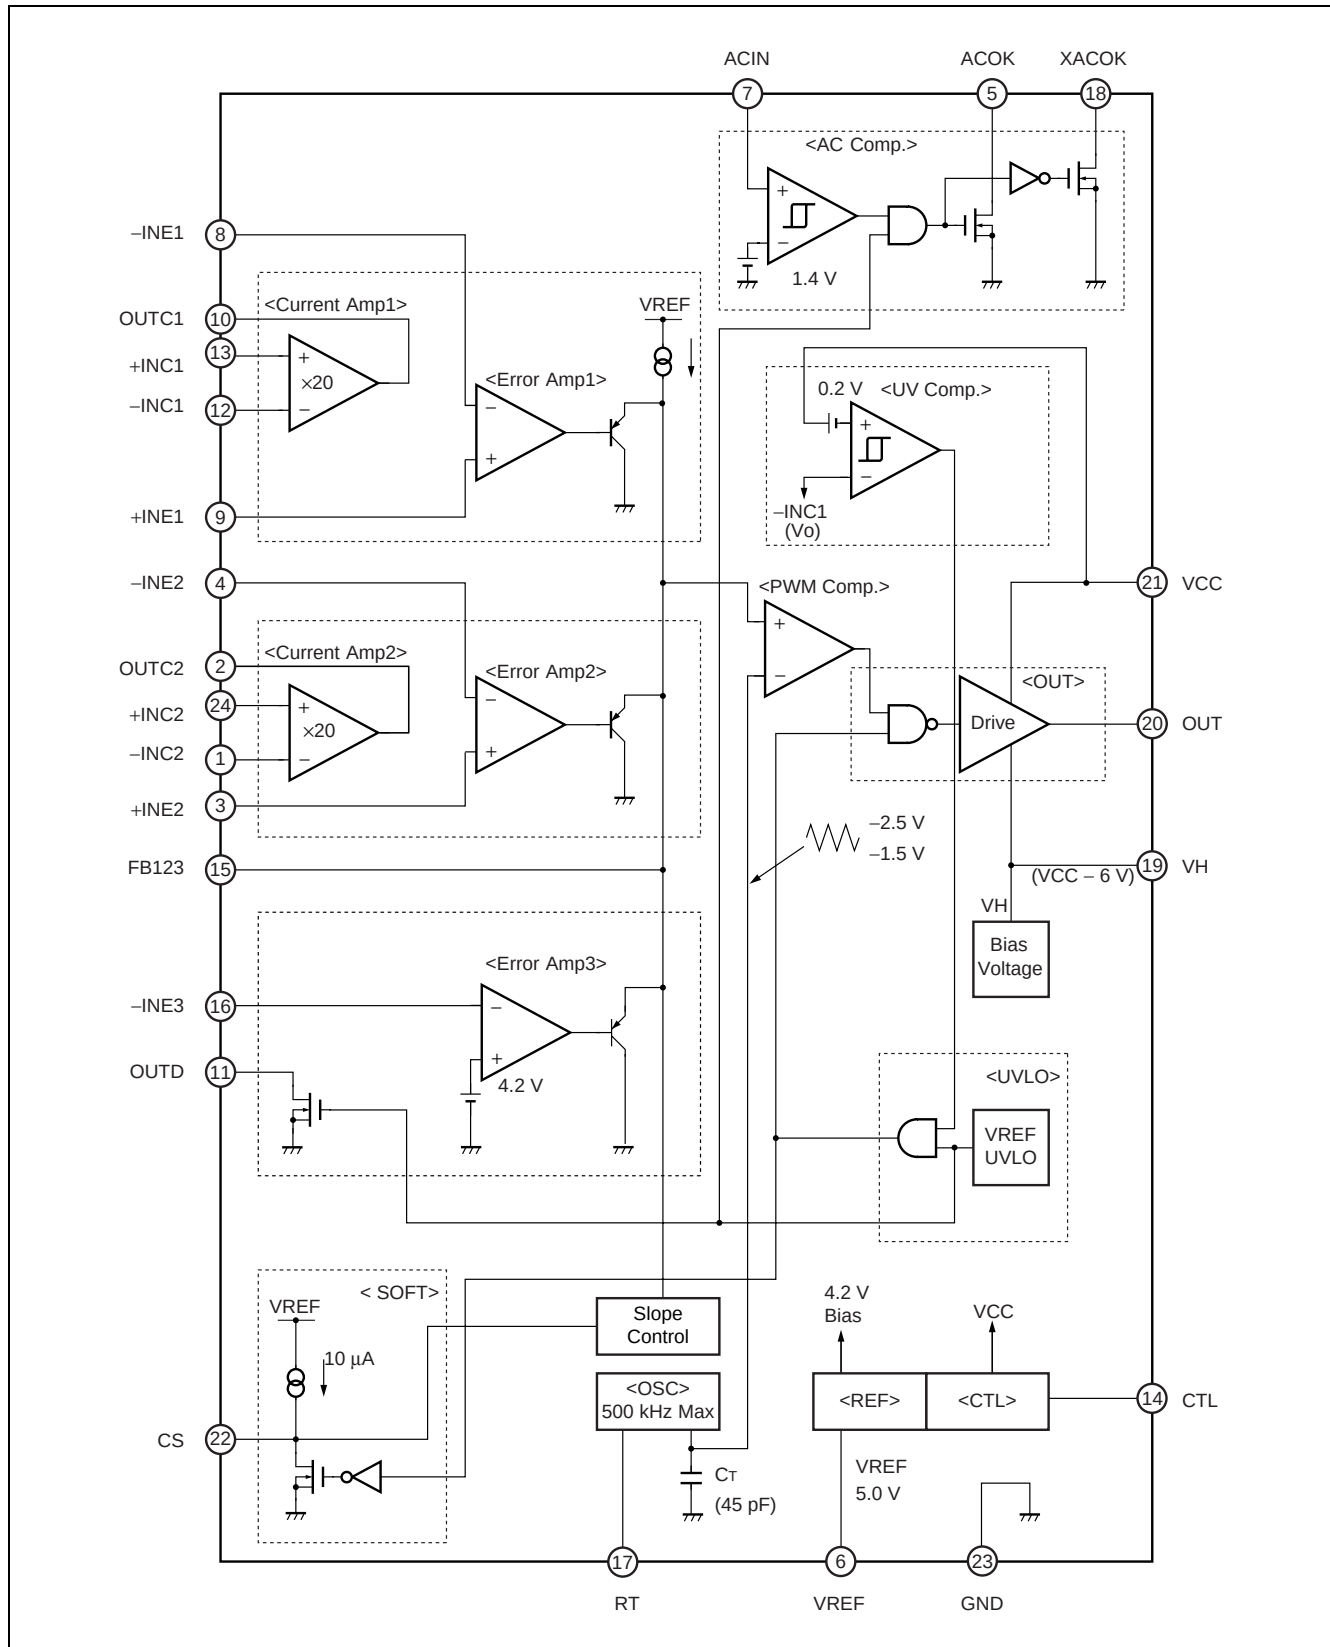

# MB39A125/126

[查询"MB39A125"供应商](#)

## • MB39A126

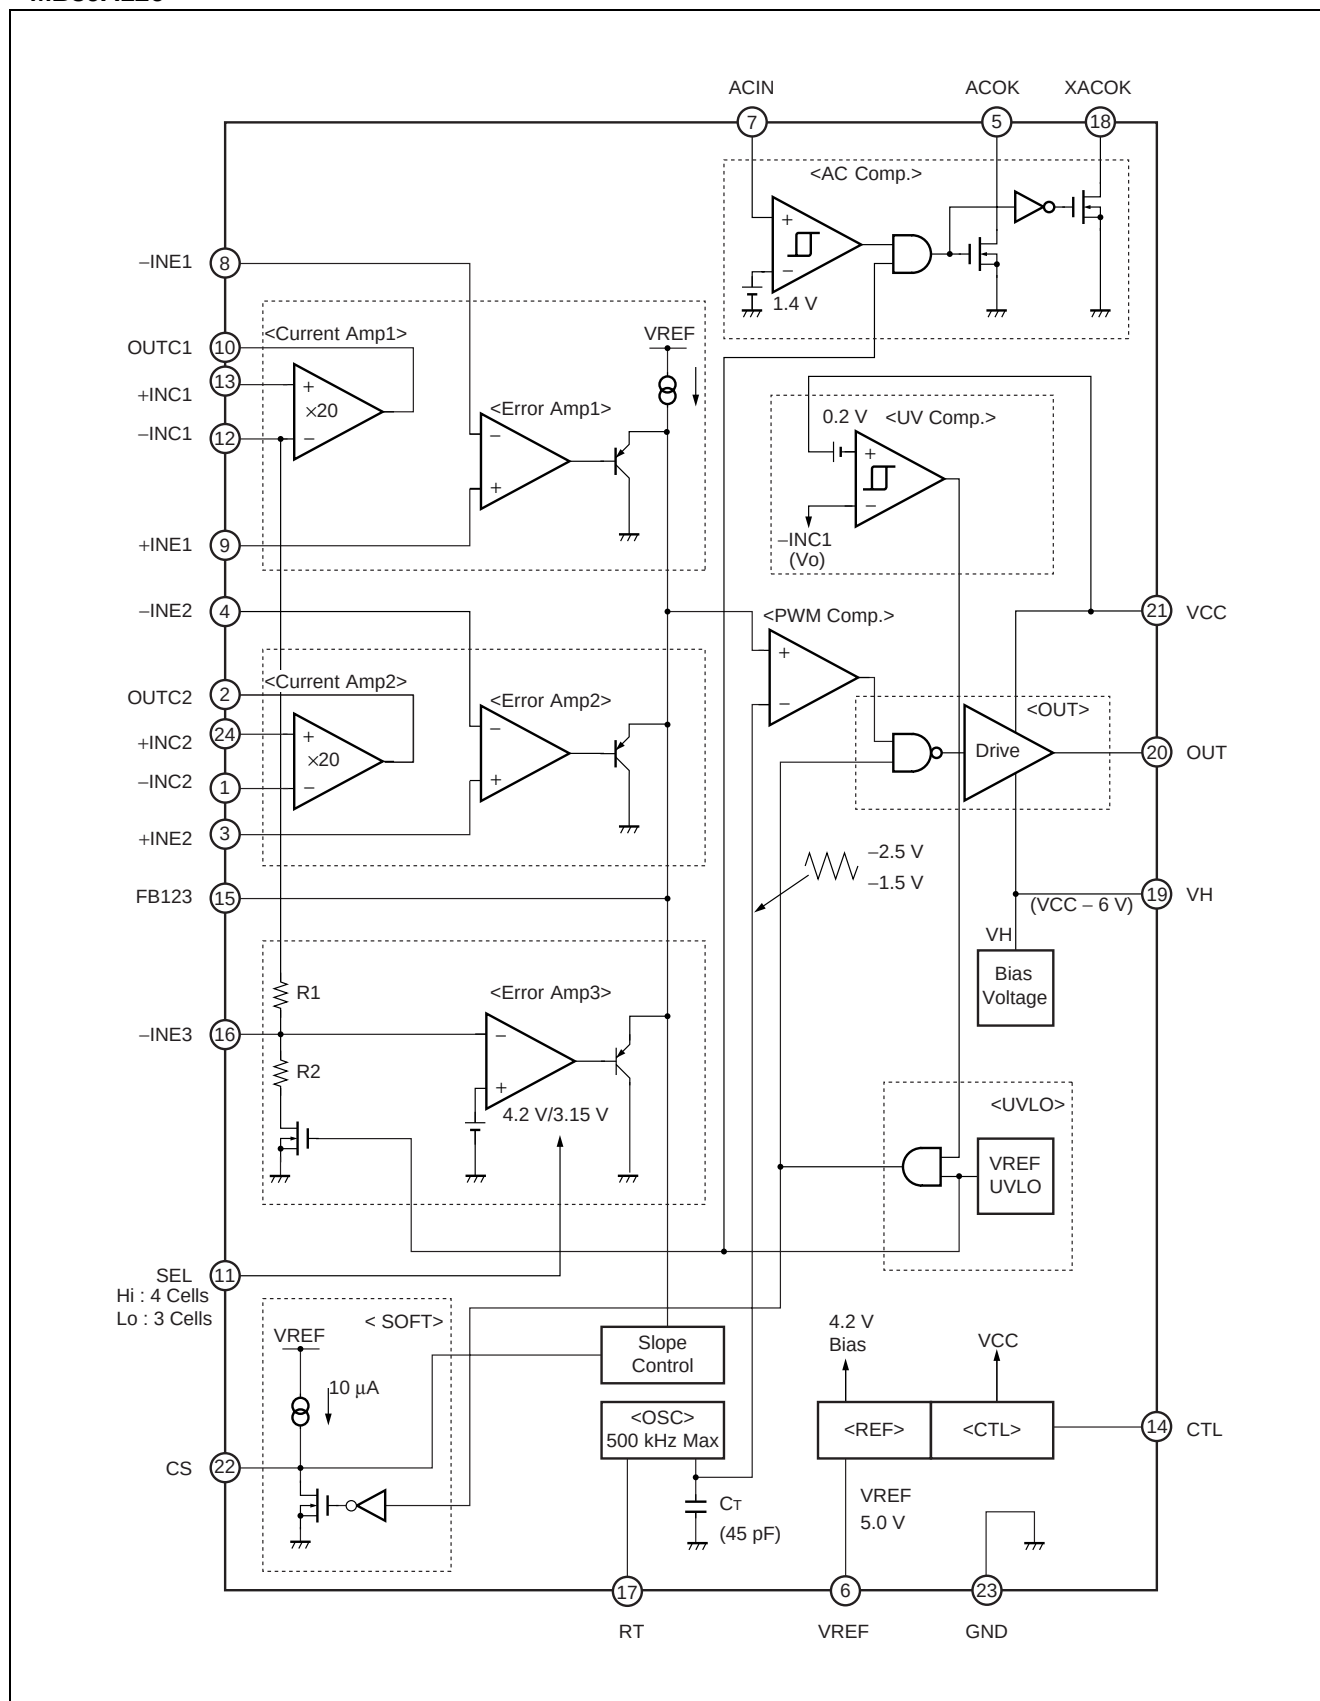

## ■ ABSOLUTE MAXIMUM RATINGS

| Parameter            | Symbol           | Condition                       | Rating |                    | Unit |
|----------------------|------------------|---------------------------------|--------|--------------------|------|
|                      |                  |                                 | Min    | Max                |      |
| Power supply voltage | V <sub>CC</sub>  | VCC terminal                    | —      | 28                 | V    |
| Output current       | I <sub>OUT</sub> | —                               | —      | 60                 | mA   |
| Peak output current  | I <sub>OUT</sub> | Duty ≤ 5% (t = 1 / fosc × Duty) | —      | 700                | mA   |
| Power dissipation    | P <sub>D</sub>   | Ta ≤ +25 °C (SSOP-24)           | —      | 740* <sup>1</sup>  | mW   |
|                      |                  | Ta ≤ +25 °C (QFN-28)            | —      | 3700* <sup>2</sup> | mW   |
| Storage temperature  | T <sub>STG</sub> | —                               | −55    | +125               | °C   |

\*1 : When mounted on a 10cm square epoxy double-sided.

\*2 : The packages are mounted on the dual-sided epoxy board (10 cm × 10 cm) . Connect IC's radiation board at bottom side to potential of GND.

WARNING: Semiconductor devices can be permanently damaged by application of stress (voltage, current, temperature, etc.) in excess of absolute maximum ratings. Do not exceed these ratings.

# MB39A125/126

[查询“MB39A125”供应商](#)

## ■ RECOMMENDED OPERATION CONDITIONS

| Parameter                                  | Symbol             | Condition                          | Value |      |                 | Unit |
|--------------------------------------------|--------------------|------------------------------------|-------|------|-----------------|------|
|                                            |                    |                                    | MIN   | TYP  | MAX             |      |
| Power supply voltage                       | V <sub>CC</sub>    | VCC terminal                       | 8     | —    | 25              | V    |
| Reference voltage Output current           | I <sub>REF</sub>   | —                                  | −1    | —    | 0               | mA   |
| VH terminal output current                 | I <sub>VH</sub>    | —                                  | 0     | —    | 30              | mA   |
| Input voltage                              | V <sub>INE</sub>   | +INE, −INE terminal                | 0     | —    | 5               | V    |
|                                            | V <sub>INC</sub>   | +INC, −INC terminal                | 0     | —    | V <sub>CC</sub> | V    |
| CTL terminal input voltage                 | V <sub>CTL</sub>   | —                                  | 0     | —    | 25              | V    |
| Output current                             | I <sub>OUT</sub>   | —                                  | −45   | —    | +45             | mA   |
| Peak output current                        | I <sub>OUT</sub>   | Duty ≤ 5%<br>(t = 1 / fosc × Duty) | −600  | —    | +600            | mA   |
| ACIN terminal input Voltage                | V <sub>ACIN</sub>  | —                                  | 0     | —    | V <sub>CC</sub> | V    |
| ACOK terminal output voltage               | V <sub>ACOK</sub>  | —                                  | 0     | —    | 25              | V    |
| ACOK terminal output current               | I <sub>ACOK</sub>  | —                                  | 0     | —    | 1               | mA   |
| XACOK terminal output voltage              | V <sub>XACOK</sub> | —                                  | 0     | —    | 25              | V    |
| XACOK terminal output current              | I <sub>XACOK</sub> | —                                  | 0     | —    | 1               | mA   |
| OUTD terminal output voltage :<br>MB39A125 | V <sub>OUTD</sub>  | —                                  | 0     | —    | 17              | V    |
| OUTD terminal output current :<br>MB39A125 | I <sub>OUTD</sub>  | —                                  | 0     | —    | 2               | mA   |
| SEL terminal input voltage :<br>MB39A126   | V <sub>SEL</sub>   | —                                  | 0     | —    | 25              | V    |
| Oscillation frequency                      | f <sub>OSC</sub>   | —                                  | 100   | 300  | 500             | kHz  |
| Timing resistor                            | R <sub>T</sub>     | —                                  | 27    | 47   | 130             | kΩ   |
| Soft-start capacitor                       | C <sub>S</sub>     | —                                  | —     | 0.22 | 1.0             | μF   |
| VH terminal capacitor                      | C <sub>VH</sub>    | —                                  | —     | 0.1  | 1.0             | μF   |
| Reference voltage output capacitor         | C <sub>REF</sub>   | —                                  | —     | 0.22 | 1.0             | μF   |
| Operating ambient Temperature              | T <sub>a</sub>     | —                                  | −30   | +25  | +85             | °C   |

Note : The terminal number which has been described in the text is the one of the SSOP-24P package after this.

**WARNING:** The recommended operating conditions are required in order to ensure the normal operation of the semiconductor device. All of the device's electrical characteristics are warranted when the device is operated within these ranges.

Always use semiconductor devices within their recommended operating condition ranges. Operation outside these ranges may adversely affect reliability and could result in device failure.

No warranty is made with respect to uses, operating conditions, or combinations not represented on the data sheet. Users considering application outside the listed conditions are advised to contact their FUJITSU representatives beforehand.

## ■ ELECTRICAL CHARACTERISTICS

(VCC = 19 V, VREF = 0 mA, Ta = +25 °C)

| Parameter                                                               |                                       | Sym-<br>bol         | Pin<br>No.    | Condition                                                                                | Value |       |       | Unit | Remarks  |
|-------------------------------------------------------------------------|---------------------------------------|---------------------|---------------|------------------------------------------------------------------------------------------|-------|-------|-------|------|----------|
|                                                                         |                                       |                     |               |                                                                                          | Min   | Typ   | Max   |      |          |
| 1.<br>Reference<br>voltage block<br>[REF]                               | Output voltage                        | V <sub>REF1</sub>   | 6             | Ta = +25 °C                                                                              | 4.963 | 5.000 | 5.037 | V    | MB39A125 |
|                                                                         |                                       | V <sub>REF2</sub>   | 6             | Ta = -10 °C to +85 °C                                                                    | 4.95  | 5.000 | 5.05  | V    | MB39A125 |
|                                                                         |                                       | V <sub>REF1</sub>   | 6             | Ta = +25 °C                                                                              | 4.943 | 4.980 | 5.017 | V    | MB39A126 |
|                                                                         |                                       | V <sub>REF2</sub>   | 6             | Ta = -10 °C to +85 °C                                                                    | 4.930 | 4.980 | 5.030 | V    | MB39A126 |
|                                                                         | Input stability                       | Line                | 6             | VCC = 8 V to 25 V                                                                        | —     | 3     | 10    | mV   |          |
|                                                                         | Load stability                        | Load                | 6             | VREF = 0 mA to -1 mA                                                                     | —     | 1     | 10    | mV   |          |
|                                                                         | Output current<br>at short circuit    | I <sub>OS</sub>     | 6             | VREF = 1 V                                                                               | -50   | -25   | -12   | mA   |          |
| 2.<br>Under voltage<br>lockout<br>protection<br>circuit block<br>[UVLO] | Threshold<br>voltage                  | V <sub>TLH</sub>    | 6             | VREF =  | 2.6   | 2.8   | 3.0   | V    |          |
|                                                                         |                                       | V <sub>THL</sub>    | 6             | VREF =  | 2.4   | 2.6   | 2.8   | V    |          |
|                                                                         | Hysteresis<br>width                   | V <sub>H</sub>      | 6             | —                                                                                        | —     | 0.2*  | —     | V    |          |
| 3.<br>Soft start block<br>[SOFT]                                        | Charge<br>current                     | I <sub>CS</sub>     | 22            | —                                                                                        | -14   | -10   | -6    | μA   |          |
| 4.<br>Triangular<br>wave oscillator<br>block [OSC]                      | Oscillation<br>frequency              | f <sub>OSC</sub>    | 20            | RT = 47 kΩ                                                                               | 270   | 300   | 330   | kHz  |          |
|                                                                         | Frequency<br>temperature<br>stability | Δf/fdt              | 20            | Ta = -30 °C to +85 °C                                                                    | —     | 1*    | —     | %    |          |
| 5-1.<br>Error amplifier<br>block<br>[Error Amp1,<br>Error Amp2]         | Input offset<br>voltage               | V <sub>IO</sub>     | 3, 4,<br>8, 9 | FB123 = 2 V                                                                              | —     | 1     | 5     | mV   |          |
|                                                                         | Input bias<br>current                 | I <sub>B</sub>      | 3, 4,<br>8, 9 | —                                                                                        | -100  | -30   | —     | nA   |          |
|                                                                         | Common<br>mode input<br>voltage range | V <sub>CM</sub>     | 3, 4,<br>8, 9 | —                                                                                        | 0     | —     | 5     | V    |          |
|                                                                         | Voltage gain                          | A <sub>V</sub>      | 15            | DC                                                                                       | —     | 100*  | —     | dB   |          |
|                                                                         | Frequency<br>bandwidth                | BW                  | 15            | AV = 0 dB                                                                                | —     | 1.3*  | —     | MHz  |          |
|                                                                         | Output voltage                        | V <sub>FBH</sub>    | 15            | —                                                                                        | 4.8   | 5.0   | —     | V    |          |
|                                                                         |                                       | V <sub>FBL</sub>    | 15            | —                                                                                        | —     | 0.8   | 0.9   | V    |          |
|                                                                         | Output source<br>current              | I <sub>SOURCE</sub> | 15            | FB123 = 2 V                                                                              | —     | -120  | -60   | μA   |          |
|                                                                         | Output sink<br>current                | I <sub>SINK</sub>   | 15            | FB123 = 2 V                                                                              | 2.0   | 4.0   | —     | mA   |          |

\* : Standard design value

(Continued)

# MB39A125/126

[查询"MB39A125"供应商](#)

(VCC = 19 V, VREF = 0 mA, Ta = +25 °C)

| Parameter                                              |                                             | Sym-<br>bol         | Pin<br>No. | Condition                                        | Value  |        |        | Unit | Remarks  |
|--------------------------------------------------------|---------------------------------------------|---------------------|------------|--------------------------------------------------|--------|--------|--------|------|----------|
|                                                        |                                             |                     |            |                                                  | Min    | Typ    | Max    |      |          |
| 5-2.<br>Error<br>amplifier<br>block<br>[Error<br>Amp3] | Input<br>current                            | I <sub>INE</sub>    | 16         | −INE3 = 0 V                                      | −100   | −30    | —      | nA   | MB39A125 |
|                                                        | Voltage<br>gain                             | A <sub>v</sub>      | 15         | DC                                               | —      | 100*   | —      | dB   |          |
|                                                        | Frequency<br>bandwidth                      | BW                  | 15         | AV = 0 dB                                        | —      | 1.3*   | —      | MHz  |          |
|                                                        | Output<br>voltage                           | V <sub>FBH</sub>    | 15         | —                                                | 4.8    | 5.0    | —      | V    |          |
|                                                        |                                             | V <sub>FBL</sub>    | 15         | —                                                | —      | 0.8    | 0.9    | V    |          |
|                                                        | Output<br>source<br>current                 | I <sub>SOURCE</sub> | 15         | FB123 = 2 V                                      | —      | −120   | −60    | μA   |          |
|                                                        | Output sink<br>current                      | I <sub>SINK</sub>   | 15         | FB123 = 2 V                                      | 2.0    | 4.0    | —      | mA   |          |
|                                                        | Threshold<br>voltage                        | V <sub>TH1</sub>    | 16         | FB123 = 2 V,<br>Ta = +25 °C                      | 4.179  | 4.200  | 4.220  | V    | MB39A125 |
|                                                        |                                             | V <sub>TH2</sub>    | 16         | FB123 = 2 V,<br>Ta = −10 °C to +85 °C            | 4.169  | 4.200  | 4.231  | V    | MB39A125 |
|                                                        |                                             | V <sub>TH3</sub>    | 12         | SEL = 5 V, FB123 = 2 V,<br>Ta = +25 °C           | 16.700 | 16.800 | 16.900 | V    | MB39A126 |
|                                                        |                                             | V <sub>TH4</sub>    | 12         | SEL = 5 V, FB123 = 2 V,<br>Ta = −10 °C to +85 °C | 16.666 | 16.800 | 16.934 | V    | MB39A126 |
|                                                        |                                             | V <sub>TH5</sub>    | 12         | SEL = 0 V, FB123 = 2 V,<br>Ta = +25 °C           | 12.525 | 12.600 | 12.675 | V    | MB39A126 |
|                                                        |                                             | V <sub>TH6</sub>    | 12         | SEL = 0 V, FB123 = 2 V,<br>Ta = −10 °C to +85 °C | 12.500 | 12.600 | 12.700 | V    | MB39A126 |
|                                                        | OUTD<br>terminal<br>output leak<br>current  | I <sub>LEAK</sub>   | 11         | OUTD = 17 V                                      | —      | 0      | 1      | μA   | MB39A125 |
|                                                        | OUTD<br>terminal<br>output ON<br>resistance | R <sub>ON</sub>     | 11         | OUTD = 1 mA                                      | —      | 35     | 50     | Ω    | MB39A125 |
|                                                        | Input<br>current                            | I <sub>IN</sub>     | 12         | −INC1 = 16.8 V                                   | —      | 84     | 150    | μA   | MB39A126 |
|                                                        | Input<br>resistance                         | R1                  | 12, 16     | —                                                | 105    | 150    | 195    | kΩ   | MB39A126 |
|                                                        |                                             | R2                  | 16         | —                                                | 35     | 50     | 65     | kΩ   | MB39A126 |

\* : Standard design value

(Continued)



(VCC = 19 V, VREF = 0 mA, Ta = +25 °C)

| Parameter                                                                                 |                                          | Sym-<br>bol        | Pin No.          | Condition                                                       | Value |      |                 | Unit | Remarks  |
|-------------------------------------------------------------------------------------------|------------------------------------------|--------------------|------------------|-----------------------------------------------------------------|-------|------|-----------------|------|----------|
|                                                                                           |                                          |                    |                  |                                                                 | Min   | Typ  | Max             |      |          |
| 5-2.<br>Error<br>amplifier<br>block<br>[Error Amp3]                                       | SEL input<br>voltage                     | V <sub>ON</sub>    | 11               | Error Amp3<br>reference voltage<br>= 4.2 V<br>(4-cell setting)  | 2     | —    | 25              | V    | MB39A126 |
|                                                                                           |                                          | V <sub>OFF</sub>   | 11               | Error Amp3<br>reference voltage<br>= 3.15 V<br>(3-cell setting) | 0     | —    | 0.8             | V    | MB39A126 |
|                                                                                           | Input<br>current                         | I <sub>SELH</sub>  | 11               | SEL = 5 V                                                       | —     | 50   | 100             | μA   | MB39A126 |
|                                                                                           |                                          | I <sub>SELL</sub>  | 11               | SEL = 0 V                                                       | —     | 0    | 1               | μA   | MB39A126 |
| 6.<br>Current<br>Detection<br>Amplifier<br>Block<br>[Current<br>Amp1,<br>Current<br>Amp2] | Input<br>offset<br>voltage               | V <sub>IO</sub>    | 1, 12,<br>13, 24 | +INC1 = +INC2 =<br>-INC1 = -INC2 =<br>3 V to VCC                | -3    | —    | +3              | mV   |          |
|                                                                                           | Input<br>current                         | I <sub>+INCH</sub> | 13, 24           | +INC1 = +INC2 =<br>3 V to VCC,<br>ΔV <sub>IN</sub> = -100 mV    | —     | 20   | 30              | μA   |          |
|                                                                                           |                                          | I <sub>-INCH</sub> | 1, 12            | +INC1 = +INC2 =<br>3 V to VCC,<br>ΔV <sub>IN</sub> = -100 mV    | —     | 0.1  | 0.2             | μA   | MB39A125 |
|                                                                                           |                                          |                    | 1                | +INC1 = +INC2 =<br>3 V to VCC,<br>ΔV <sub>IN</sub> = -100 mV    | —     | 0.1  | 0.2             | μA   | MB39A126 |
|                                                                                           |                                          | I <sub>+INCL</sub> | 13, 24           | +INC1 = +INC2 = 0 V,<br>ΔV <sub>IN</sub> = -100 mV              | -180  | -120 | —               | μA   |          |
|                                                                                           |                                          | I <sub>-INCL</sub> | 1, 12            | +INC1 = +INC2 = 0 V,<br>ΔV <sub>IN</sub> = -100 mV              | -195  | -130 | —               | μA   |          |
|                                                                                           | Current<br>detection<br>voltage          | V <sub>OUTC1</sub> | 2, 10            | +INC1 = +INC2 =<br>3 V to VCC,<br>ΔV <sub>IN</sub> = -100 mV    | 1.9   | 2.0  | 2.1             | V    |          |
|                                                                                           |                                          | V <sub>OUTC2</sub> | 2, 10            | +INC1 = +INC2 =<br>3 V to VCC,<br>ΔV <sub>IN</sub> = -20 mV     | 0.34  | 0.40 | 0.46            | V    |          |
|                                                                                           |                                          | V <sub>OUTC3</sub> | 2, 10            | +INC1 = +INC2 = 0 V,<br>ΔV <sub>IN</sub> = -100 mV              | 1.8   | 2.0  | 2.2             | V    |          |
|                                                                                           |                                          | V <sub>OUTC4</sub> | 2, 10            | +INC1 = +INC2 = 0 V,<br>ΔV <sub>IN</sub> = -20 mV               | 0.2   | 0.4  | 0.6             | V    |          |
|                                                                                           | Common<br>mode input<br>voltage<br>range | V <sub>CM</sub>    | 1, 12,<br>13, 24 | —                                                               | 0     | —    | V <sub>CC</sub> | V    |          |
|                                                                                           | Voltage<br>gain                          | A <sub>v</sub>     | 2, 10            | +INC1 = +INC2 =<br>3 V to VCC,<br>ΔV <sub>IN</sub> = -100 mV    | 19    | 20   | 21              | V/V  |          |

(Continued)

# MB39A125/126

[查询“MB39A125”供应商](#)

(VCC = 19 V, VREF = 0 mA, Ta = +25 °C)

| Parameter                                                                                 |                               | Sym-<br>bol         | Pin No. | Condition                                         | Value |       |      | Unit | Re-<br>marks |
|-------------------------------------------------------------------------------------------|-------------------------------|---------------------|---------|---------------------------------------------------|-------|-------|------|------|--------------|
|                                                                                           |                               |                     |         |                                                   | Min   | Typ   | Max  |      |              |
| 6.<br>Current<br>Detection<br>Amplifier<br>Block<br>[Current<br>Amp1,<br>Current<br>Amp2] | Frequency<br>bandwidth        | BW                  | 2, 10   | AV = 0 dB                                         | —     | 2*    | —    | MHz  |              |
|                                                                                           | Output<br>voltage             | V <sub>OUTCH</sub>  | 2, 10   | —                                                 | 4.7   | 4.9   | —    | V    |              |
|                                                                                           |                               | V <sub>OUTCL</sub>  | 2, 10   | —                                                 | —     | 20    | 200  | mV   |              |
|                                                                                           | Output<br>source cur-<br>rent | I <sub>SOURCE</sub> | 2, 10   | OUTC1 = OUTC2 = 2 V                               | —     | -2    | -1   | mA   |              |
|                                                                                           | Output sink<br>current        | I <sub>SINK</sub>   | 2, 10   | OUTC1 = OUTC2 = 2 V                               | 150   | 300   | —    | μA   |              |
| 7.<br>PWM Comp.<br>Block<br>[PWM<br>Comp.]                                                | Threshold<br>voltage          | V <sub>TL</sub>     | 15      | Duty cycle = 0%                                   | 1.4   | 1.5   | —    | V    |              |
|                                                                                           |                               | V <sub>TH</sub>     | 15      | Duty cycle = 100%                                 | —     | 2.5   | 2.6  | V    |              |
| 8.<br>Output<br>block<br>[OUT]                                                            | Output<br>source cur-<br>rent | I <sub>SOURCE</sub> | 20      | OUT = 13 V,<br>Duty ≤ 5%<br>(t = 1 / fosc × Duty) | —     | -400* | —    | mA   |              |
|                                                                                           | Output sink<br>current        | I <sub>SINK</sub>   | 20      | OUT = 19 V,<br>Duty ≤ 5%<br>(t = 1 / fosc × Duty) | —     | 400*  | —    | mA   |              |
|                                                                                           | Output ON<br>resistance       | R <sub>OH</sub>     | 20      | OUT = -45 mA                                      | —     | 6.5   | 9.8  | Ω    |              |
|                                                                                           |                               | R <sub>OL</sub>     | 20      | OUT = 45 mA                                       | —     | 5.0   | 7.5  | Ω    |              |
|                                                                                           | Rise time                     | tr1                 | 20      | OUT = 3300 pF                                     | —     | 50*   | —    | ns   |              |
|                                                                                           | Fall time                     | tf1                 | 20      | OUT = 3300 pF                                     | —     | 50*   | —    | ns   |              |
| 9.<br>Low Input<br>Voltage<br>Detection<br>Block<br>[UV Comp.]                            | Threshold<br>voltage          | V <sub>TLH</sub>    | 21      | VCC = $\overline{\text{L}}$ ,<br>-INC1 = 16.8 V   | 17.2  | 17.4  | 17.6 | V    |              |
|                                                                                           |                               | V <sub>THL</sub>    | 21      | VCC = $\overline{\text{H}}$ ,<br>-INC1 = 16.8 V   | 16.8  | 17.0  | 17.2 | V    |              |
|                                                                                           | Hysteresis<br>width           | V <sub>H</sub>      | 21      | —                                                 | —     | 0.4*  | —    | V    |              |
| 10.<br>AC Adapter<br>Voltage<br>Detection<br>Block<br>[AC Comp.]                          | Threshold<br>voltage          | V <sub>TLH</sub>    | 7       | ACIN = $\overline{\text{L}}$                      | 1.3   | 1.4   | 1.5  | V    |              |
|                                                                                           |                               | V <sub>THL</sub>    | 7       | ACIN = $\overline{\text{H}}$                      | 1.2   | 1.3   | 1.4  | V    |              |
|                                                                                           | Hysteresis<br>width           | V <sub>H</sub>      | 7       | —                                                 | —     | 0.1*  | —    | V    |              |

\* : Standard design value

(Continued)

(Continued)


(VCC = 19 V, VREF = 0 mA, Ta = +25 °C)

| Parameter                                                        |                                              | Sym-<br>bol       | Pin<br>No. | Condition                                | Value        |              |              | Unit | Re-<br>marks |
|------------------------------------------------------------------|----------------------------------------------|-------------------|------------|------------------------------------------|--------------|--------------|--------------|------|--------------|
|                                                                  |                                              |                   |            |                                          | Min          | Typ          | Max          |      |              |
| 10.<br>AC Adapter<br>Voltage<br>Detection<br>Block<br>[AC Comp.] | ACOK<br>terminal<br>output leak<br>current   | I <sub>LEAK</sub> | 5          | ACOK = 25 V                              | —            | 0            | 1            | μA   |              |
|                                                                  | ACOK<br>terminal<br>output ON<br>resistance  | R <sub>ON</sub>   | 5          | ACOK = 1 mA                              | —            | 200          | 400          | Ω    |              |
|                                                                  | XACOK<br>terminal<br>output leak<br>current  | I <sub>LEAK</sub> | 18         | XACOK = 25 V                             | —            | 0            | 1            | μA   |              |
|                                                                  | XACOK<br>terminal<br>output ON<br>resistance | R <sub>ON</sub>   | 18         | XACOK = 1 mA                             | —            | 200          | 400          | Ω    |              |
| 11.<br>Power<br>Supply<br>Control<br>Block<br>[CTL]              | CTL input<br>voltage                         | V <sub>ON</sub>   | 14         | IC operation mode                        | 2            | —            | 25           | V    |              |
|                                                                  |                                              | V <sub>OFF</sub>  | 14         | IC standby mode                          | 0            | —            | 0.8          | V    |              |
|                                                                  | Input current                                | I <sub>CTLH</sub> | 14         | CTL = 5 V                                | —            | 100          | 150          | μA   |              |
|                                                                  |                                              | I <sub>CTL</sub>  | 14         | CTL = 0 V                                | —            | 0            | 1            | μA   |              |
| 12.<br>Bias Voltage<br>Block<br>[VH]                             | Output<br>Voltage                            | V <sub>H</sub>    | 19         | VCC = 8 V to 25 V,<br>VH = 0 mA to 30 mA | VCC –<br>6.5 | VCC –<br>6.0 | VCC –<br>5.5 | V    |              |
| 13.<br>General                                                   | Standby<br>current                           | I <sub>CCS</sub>  | 21         | CTL = 0 V                                | —            | 0            | 10           | μA   |              |
|                                                                  | Power<br>supply<br>current                   | I <sub>CC</sub>   | 21         | CTL = 5 V                                | —            | 5            | 7.5          | mA   |              |


\* : Standard design value

## ■ TYPICAL CHARACTERISTICS


Power Supply Current vs. Power Supply Voltage

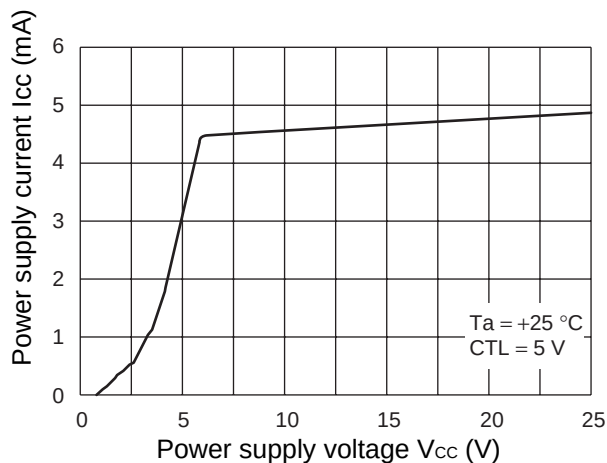


CTL Terminal Input Current, Reference Voltage vs. CTL Terminal Input Voltage

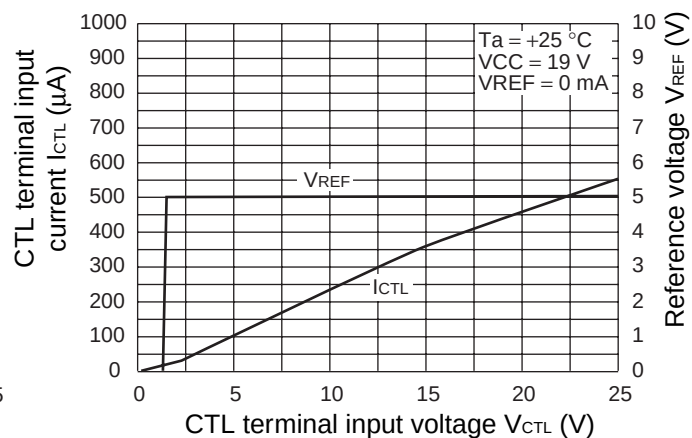


Reference Voltage vs. Power Supply Voltage

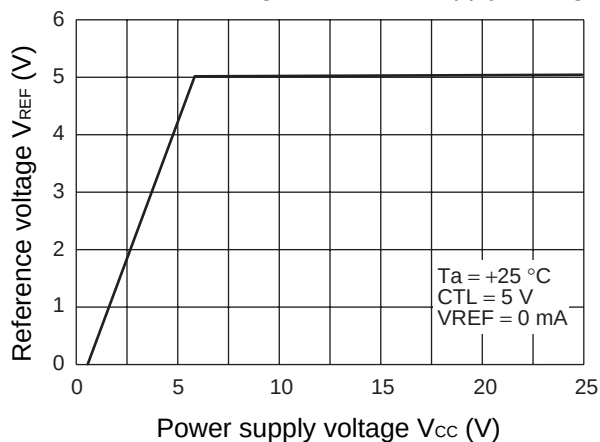


Reference Voltage vs. Load Current

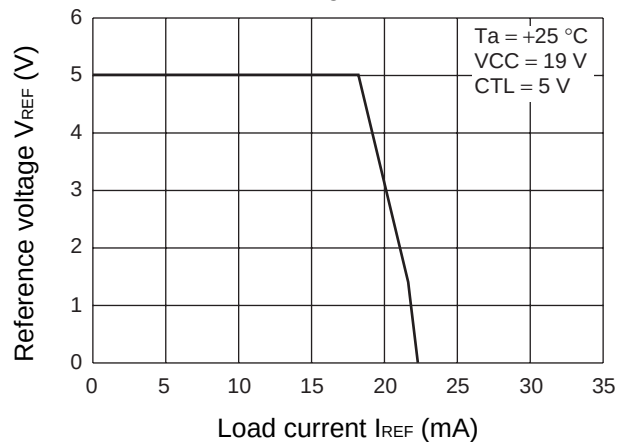

Reference Voltage vs. Operating Ambient Temperature

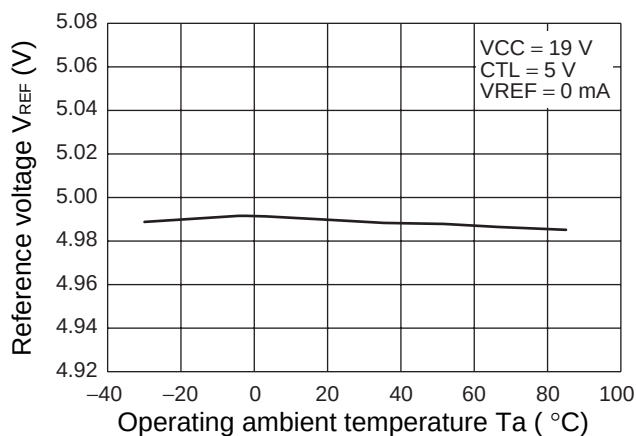


Triangular Wave Oscillation Frequency vs. Power Supply Voltage

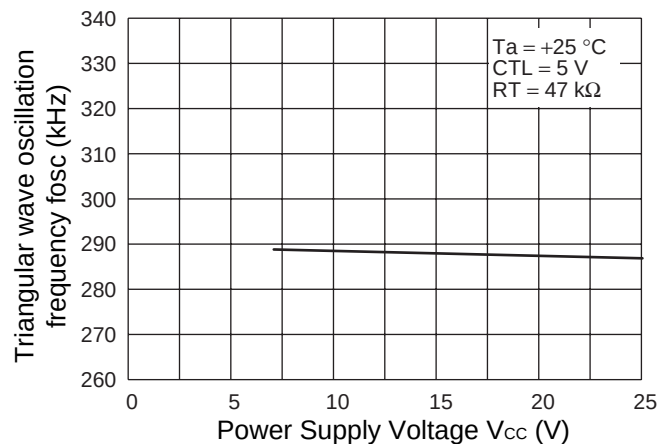


(Continued)

Triangular Wave Oscillation Frequency vs. Operating Ambient Temperature

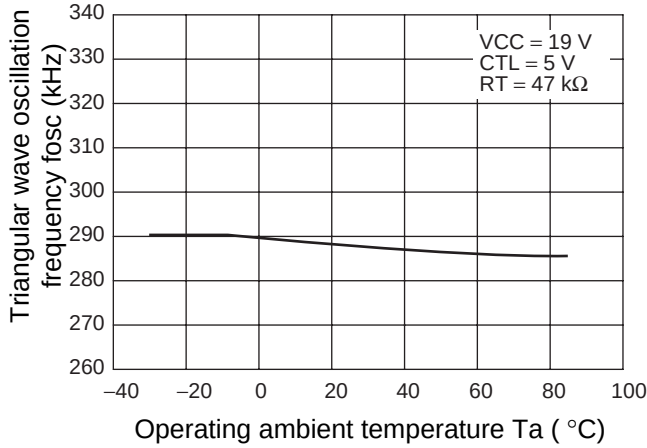


<MB39A125>

Error Amplifier Threshold Voltage vs. Operating Ambient Temperature

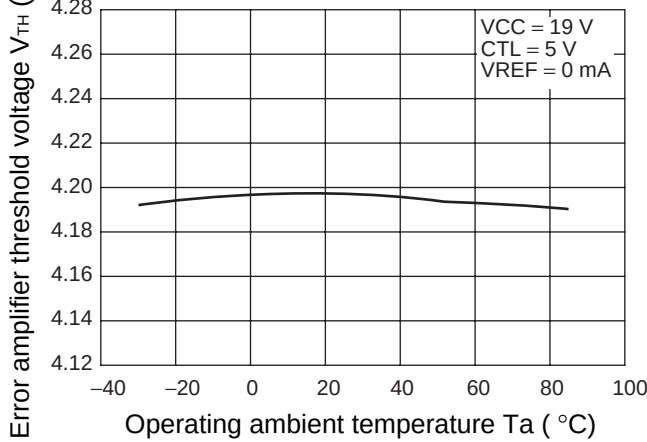


<MB39A126>


Error Amplifier Threshold Voltage vs. Operating Ambient Temperature

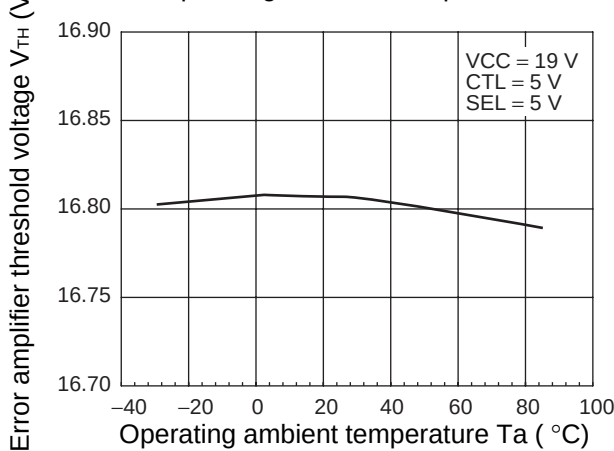

Triangular Wave Oscillation Frequency vs. Timing Resistor

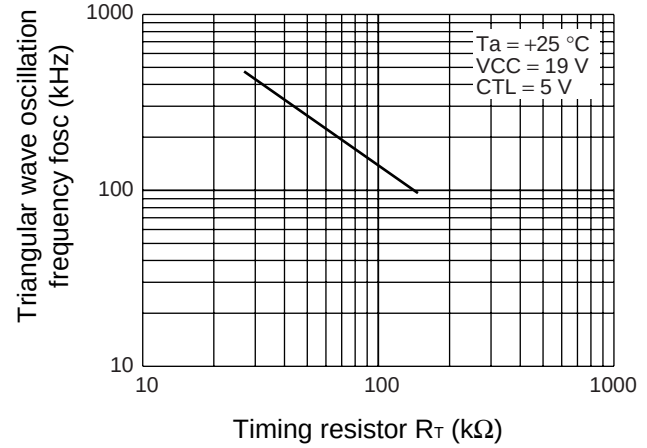

Error Amplifier Threshold Voltage vs. Operating Ambient Temperature


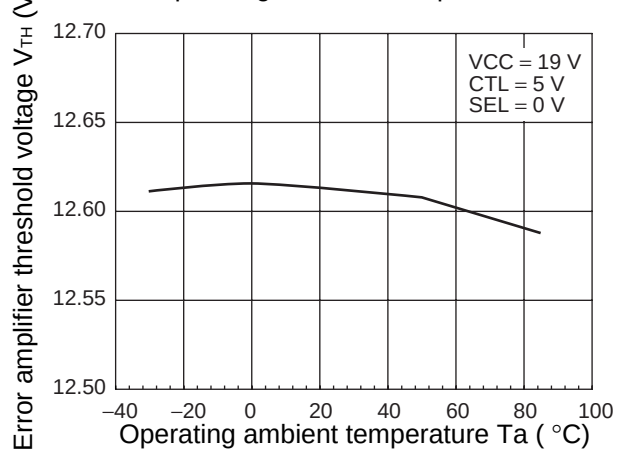


(Continued)



# MB39A125/126

查询“MB39A125”供应商



Error Amplifier, Gain, Phase vs. Frequency

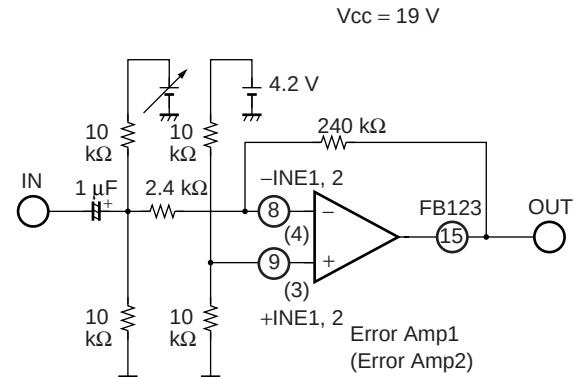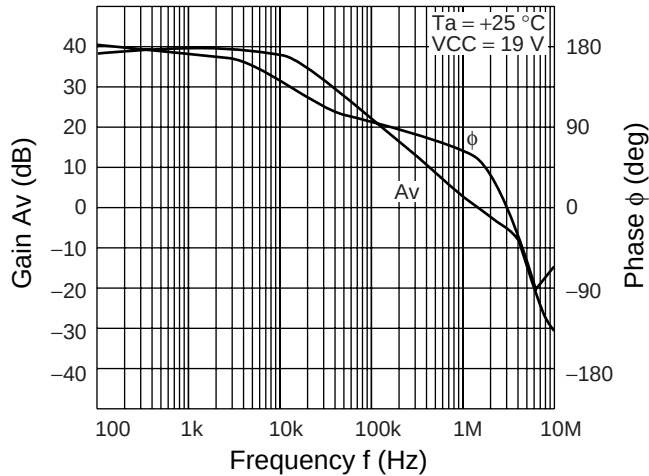

Error Amplifier, Gain, Phase vs. Frequency

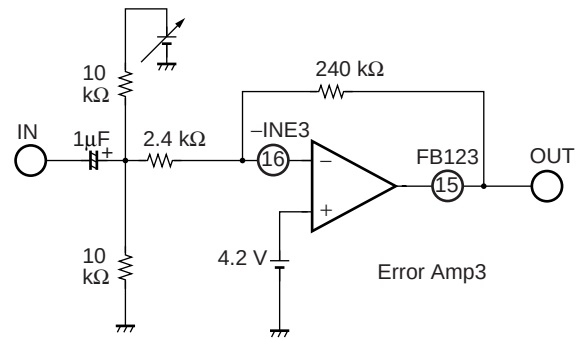
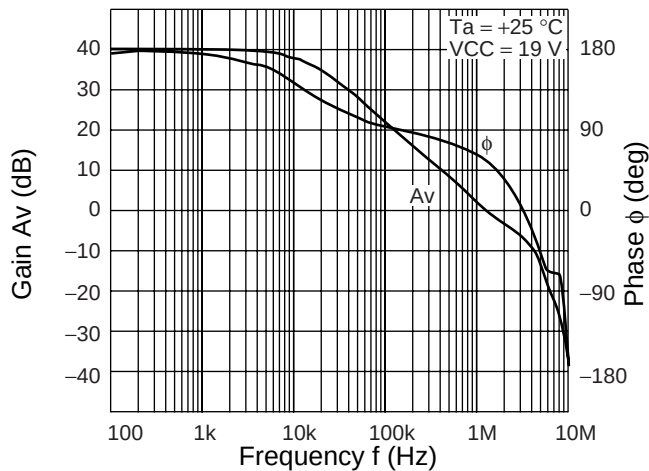


Current Detection Amplifier, Gain, Phase vs. Frequency

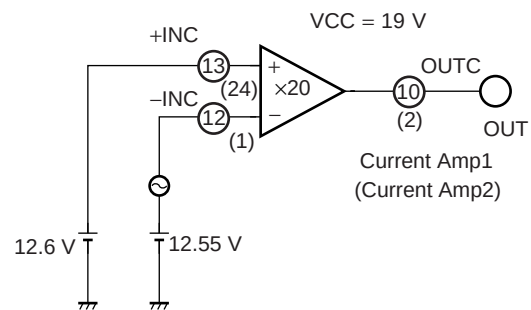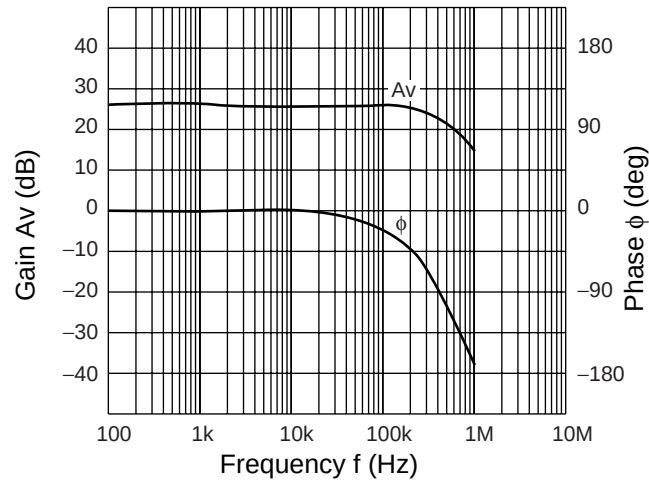

(Continued)

(Continued)

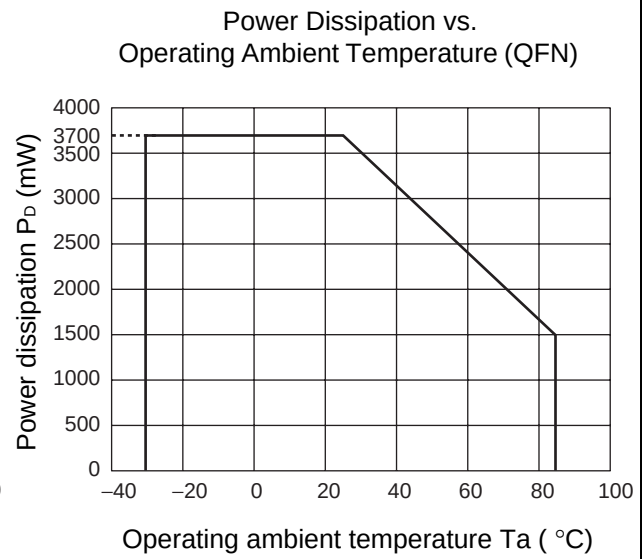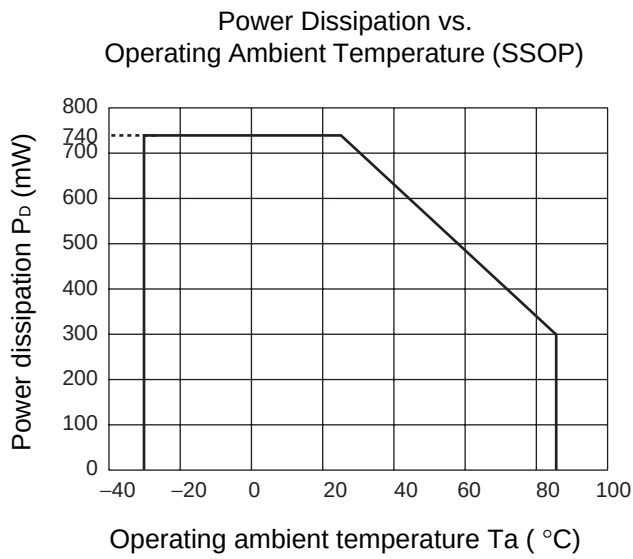

## ■ FUNCTIONAL DESCRIPTION

### 1. DC/DC Converter Block

#### (1) Reference voltage block (REF)

The reference voltage circuit uses the voltage supplied from the VCC terminal (pin 21) to generate a temperature compensated, stable voltage (5.0 V Typ) used as the reference power supply voltage for the IC's internal circuitry.

This block can also be used to obtain a load current to a maximum of 1 mA from the reference voltage VREF terminal (pin 6) .

#### (2) Triangular wave oscillator block (OSC)

The triangular wave oscillator block has built-in capacitor for frequency setting into and generates the triangular wave oscillation waveform by connecting the frequency setting resistor with the RT terminal (pin 17) .

The triangular wave is input to the PWM comparator circuits on the IC.

#### (3) Error amplifier block (Error Amp1)

This amplifier detects the output signal from the current detection amplifier (Current Amp1) , compares this to the +INE1 terminal (pin 9) , and outputs a PWM control signal to be used in controlling the charge current.

In addition, an arbitrary loop gain can be set up by connecting a feedback resistor and capacitor between the FB123 terminal (pin 15) and –INE1 terminal (pin 8) , providing stable phase compensation to the system.

#### (4) Error amplifier block (Error Amp2)

This amplifier detects the output signal from the current detection amplifier (Current Amp2) , compares this to the +INE2 terminal (pin 3) , and outputs a PWM control signal to be used in controlling the charge current.

In addition, an arbitrary loop gain can be set up by connecting a feedback resistor and capacitor between the FB123 terminal (pin 15) and –INE2 terminal (pin 4) , providing stable phase compensation to the system.

#### (5) Error amplifier block (Error Amp3)

This error amplifier (Error Amp3) detects the output voltage from the DC/DC converter and outputs the PWM control signal. MB39A125 can set the desired level of output voltage from 1 cell to 4 cells by connecting external output voltage setting resistors to the error amplifier inverted input terminal. MB39A126 can set the output voltage for 3 cells or 4 cells by SEL terminal (pin 11) input.

In addition, an arbitrary loop gain can be set by connecting a feedback resistor and capacitor from the FB123 terminal (pin 15) to the –INE3 terminal (pin 16) , enabling stable phase compensation to the system.

#### (6) Current detection amplifier block (Current Amp1)

The current detection amplifier (Current Amp1) detects a voltage drop which occurs between both ends of the output sense resistor (RS2) due to the flow of the charge current, using the +INC1 terminal (pin 13) and –INC1 terminal (pin 12) . The signal amplified to 20 times is output to the OUTC1 terminal (pin 10) .



## (7) Current detection amplifier block (Current Amp2)

The current detection amplifier (Current Amp2) detects a voltage drop which occurs between both ends of the output sense resistor (RS1) due to the flow of the AC adapter current, using the +INC2 terminal (pin 24) and -INC2 terminal (pin 1) . The signal amplified to 20 times is output to the OUTC2 terminal (pin 2) .

## (8) PWM comparator block (PWM Comp.)

The PWM comparator circuit is a voltage-pulse width converter for controlling the output duty of the error amplifiers (Error Amp1 to Error Amp3) depending on their output voltage.

The PWM comparator circuit compares the triangular wave voltage the lowest generated by the triangular wave oscillator to the error amplifier output voltage and turns on the external output transistor, during the interval in which the triangular wave voltage is lower than the error amplifier output voltage.

## (9) Output block (OUT)

The output circuit uses a totem-pole configuration capable of driving an external Pch MOS FET.

The output “L” level sets the output amplitude to 6 V (Typ) using the voltage generated by the bias voltage block (VH) .

This results in increasing conversion efficiency and suppressing the withstand voltage of the connected external transistor in a wide range of input voltages.

## (10) Power supply control block (CTL)

Setting the CTL terminal (pin 14) low places the IC in the standby mode. (The power supply current is 10μA at maximum in the standby mode.)

**CTL function table : MB39A125**

| CTL | Power         | OUTD |
|-----|---------------|------|
| L   | OFF (Standby) | Hi-Z |
| H   | ON (Active)   | L    |

**CTL function table : MB39A126**

| CTL | Power         |
|-----|---------------|
| L   | OFF (Standby) |
| H   | ON (Active)   |

## (11) Bias voltage block (VH)

The bias voltage circuit outputs  $V_{CC} - 6\text{ V}$  (Typ) as the minimum potential of the output circuit. In the standby mode, this circuit outputs the potential equal to  $V_{CC}$ .

# MB39A125/126

[查询"MB39A125"供应商](#)

## 2. Protection Functions

### (1) Under voltage lockout protection circuit block (UVLO)

The transient state or a momentary decrease in power supply voltage or internal reference voltage (VREF), which occurs when the power supply (VCC) is turned on, may cause malfunctions in the control IC, resulting in breakdown or deterioration of the system.

To prevent such malfunction, the under voltage lockout protection circuit detects internal reference voltage drop and fixes the OUT terminal (pin 20) to the "H" level. The system restores voltage supply when the internal reference voltage reaches the threshold voltage of the under voltage lockout protection circuit.

#### Protection circuit (UVLO) operation function table : MB39A125

When UVLO is operating (VREF voltage is lower than UVLO threshold voltage, the logic of the following terminal is fixed.)

| OUTD | OUT | CS | ACOK | XACOK |
|------|-----|----|------|-------|
| Hi-Z | H   | L  | H    | L     |

#### Protection circuit (UVLO) operation function table : MB39A126

When UVLO is operating (VREF voltage is lower than UVLO threshold voltage, the logic of the following terminal is fixed.)

| OUT | CS | ACOK | XACOK |
|-----|----|------|-------|
| H   | L  | H    | L     |

### (2) Low input voltage detection block (UV Comp.)

UV Comp. detects that power supply voltage (VCC) is lower than the battery voltage +0.2 V (Typ) and fixes the OUT terminal (pin 20) to the "H" level.

The system restores voltage supply when the power supply voltage reaches the threshold voltage of the AC adapter detection block.

#### Protection circuit (UV Comp.) operation function table : MB39A125

When UV Comp. is operating (VCC voltage is lower than UV Comp. threshold voltage, the logic of the following terminal is fixed.)

| OUTD | OUT | CS |
|------|-----|----|
| L    | H   | L  |

#### Protection circuit (UV Comp.) operation function table : MB39A126

When UV Comp. is operating (VCC voltage is lower than UV Comp. threshold voltage, the logic of the following terminal is fixed.)

| OUT | CS |
|-----|----|
| H   | L  |

### 3. Detection Function

#### (1) AC adapter voltage detection block (AC Comp.)

When ACIN terminal (pin 7) voltage is lower than 1.3 V (Typ) , AC adapter voltage detection block (AC Comp.) outputs "Hi-Z" level to the ACOK terminal (pin 5) and outputs "L" level to the XACOK terminal (pin 18) . When CTL terminal (pin 14) is set to "L" level, ACOK terminal (pin 5) and XACOK terminal (pin 18) are fixed to "Hi-Z" level.

| ACIN | ACOK | XACOK |
|------|------|-------|
| H    | L    | Hi-Z  |
| L    | Hi-Z | L     |

### 4. Switch Function : MB39A126

The charge voltage can be set to 16.8 V/12.6 V with the SEL terminal (pin 11) .

#### SEL function table

| SEL | DC/DC output setting voltage |
|-----|------------------------------|
| H   | 16.8 V                       |
| L   | 12.6 V                       |

# MB39A125/126

[查询"MB39A125"供应商](#)

## ■ CONSTANT CHARGING VOLTAGE AND CURRENT OPERATION

MB39A125/126 is DC/DC converter with the pulse width modulation (PWM) .

MB39A125 is in the output voltage control loop, the Error Amp3 compares internal voltage reference voltage 4.2 V and DC/DC converter output to output the PWM controlled signal.

MB39A126 is in the output voltage control loop, the Error Amp3 compares internal voltage reference voltage 4.2 V/3.15 V and DC/DC converter output to output the PWM controlled signal.

In the charging current control loop, the voltage drop generated at both ends of charging current sense resistor (RS2) is sensed by +INC1 terminal (pin 13) , -INC1 terminal (pin 12) of Current Amp1, and the signal is output to OUTC1 terminal (pin 10) , which is amplified by 20 times. Error Amp1 compares the OUTC1 terminal (pin 10) voltage, which is the output of Current Amp1, and +INE1 terminal (pin 9) to output the PWM control signal and regulates the charging current.

In the AC adapter current control loop, the voltage drop generated at both ends of AC adapter current sense resistor (RS1) is sensed by +INC2 terminal (pin 24) , -INC2 terminal (pin 1) of Current Amp2, and the signal is output to OUTC2 terminal (pin 2) , which is amplified by 20 times. Error Amp2 compares OUTC2 terminal (pin 2) voltage, which is output of Current Amp2, and +INE2 terminal (pin 3) voltage and outputs PWM controlled signal, and it limits the charging current due to the AC adapter current not to exceed the setting value.

The PWM comparator compares the triangular wave to the smallest terminal voltage among the Error AMP1, Error AMP2 and Error AMP3. And the triangular wave voltage generated by the triangular wave oscillator. When the triangular wave voltage is smaller than the error amplifier output voltage, the main side output transistor is turned on.


## ■ SETTING THE CHARGE VOLTAGE

### MB39A125

The charging voltage (DC/DC output voltage) can be set by connecting external output voltage setting resistors (R3, R4) to the -INE3 terminal (pin 16). Be sure to select a resistor value that allows you to ignore the on-resistance (35 Ω, 1 mA) of the internal FET connected to the OUTD terminal (pin 11).

Battery charging voltage : Vo

$$V_o (V) = (R3 + R4) / R4 \times 4.2 (V)$$

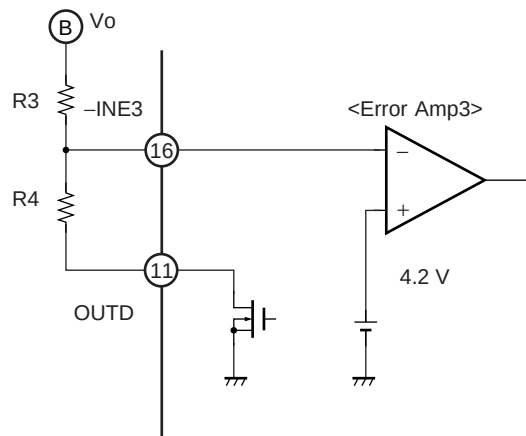

# MB39A125/126

[查询"MB39A125"供应商](#)

## MB39A126


The setting of the charge voltage is switched to 3cells or 4cells by the SEL terminal (pin 11) .

Charge voltage is set to 16.8 V when SEL terminal is "H" level, and charge voltage is set to 12.6 V when SEL terminal is "L" level.

Battery charging voltage : Vo

$$V_o (V) = (150 \text{ k}\Omega + 50 \text{ k}\Omega) / 50 \text{ k}\Omega \times 4.2 (V) = 16.8 (V) \quad (\text{SEL} = H)$$

$$V_o (V) = (150 \text{ k}\Omega + 50 \text{ k}\Omega) / 50 \text{ k}\Omega \times 3.15 (V) = 12.6 (V) \quad (\text{SEL} = L)$$

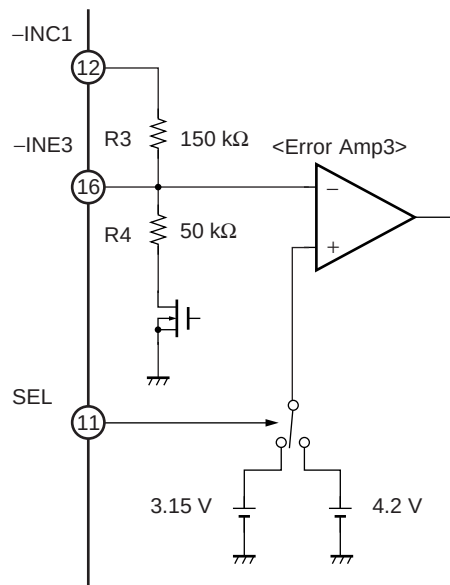

**■ SETTING THE CHARGE CURRENT**

The charge current value can be set at the analog voltage value of the +INE1 terminal (pin 9) .

$$\text{Charge current formula : } I_{\text{chg}} (\text{A}) = V_{+\text{INE1}} (\text{V}) / (20 \times R_{\text{S1}} (\Omega))$$

$$\text{Charge current setting voltage : } V_{+\text{INE1}} (\text{V}) = 20 \times I_{\text{chg}} (\text{A}) \times R_{\text{S1}} (\Omega)$$

**■ SETTING THE INPUT CURRENT**

The input limit current value can be set at the analog voltage value of the +INE2 terminal (pin 3) .

$$\text{Input current formula : } I_{\text{IN}} (\text{A}) = V_{+\text{INE2}} (\text{V}) / (20 \times R_{\text{S2}} (\Omega))$$

$$\text{Input current setting voltage : } V_{+\text{INE2}} (\text{V}) = 20 \times I_{\text{IN}} (\text{A}) \times R_{\text{S2}} (\Omega)$$

**■ SETTING THE TRIANGULAR WAVE OSCILLATION FREQUENCY**

The triangular wave oscillation frequency can be set by the timing resistor ( $R_{\text{T}}$ ) connected to the RT terminal (pin 17) .

$$\text{Triangular wave oscillation frequency } f_{\text{osc}}$$

$$f_{\text{osc}} (\text{kHz}) \doteq 14100 / R_{\text{T}} (\text{k}\Omega)$$

# MB39A125/126

[查询"MB39A125"供应商](#)

## ■ SETTING THE SOFT-START TIME

Soft-start function prevents rush current at start-up of IC when the Soft-start capacitor (Cs) is connected to the CS terminal (pin 22) . This IC charges external soft-start capacitor (Cs) with 10  $\mu$ A after CTL terminal (pin 14) voltage level becomes high and IC starts (when  $V_{CC} \geq$  UVLO threshold voltage) .

Output ON duty depends on PWM comparator, which compares the FB123 terminal (pin 15) voltage with the triangular wave oscillator output voltage.


During soft start, FB123 terminal (pin 15) voltage increases with sum voltage of CS terminal and diode voltage. Therefore, the output voltage of the DC/DC converter and current increase can be set by output ON duty in proportion to rise of CS terminal (pin 22) voltage. The ON Duty is affected by the ramp voltage of FB123 terminal (pin 15) until an output voltage of one Error Amp reaches the DC/DC converter loop controlled voltage.

Soft-start time is obtained from the following formula :

Soft-start time :  $t_s$  (time to output on duty 80 %)

$$t_s (s) \approx 0.13 \times C_s (\mu F)$$

### • Soft-start timing chart

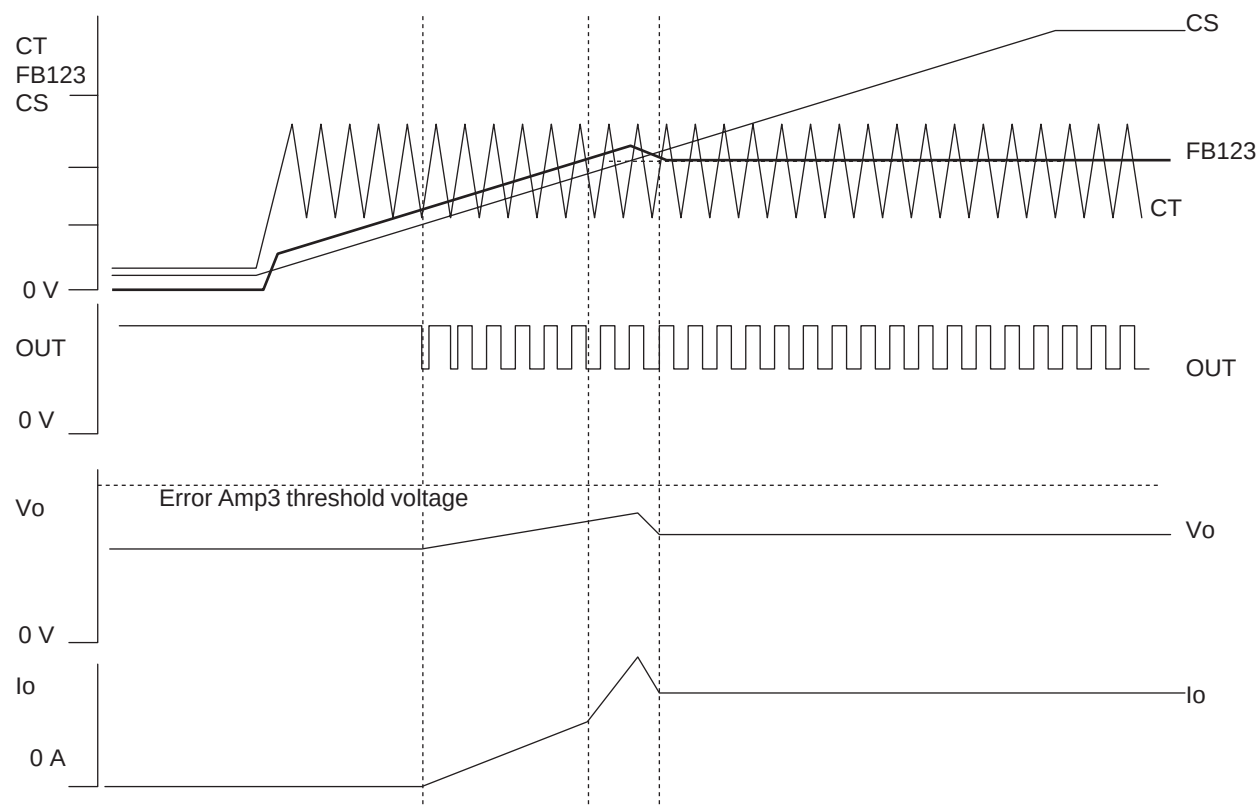



## ■ TRANSIENT RESPONSE AT LOAD-STEP


The constant voltage control loop and the constant current control loop are independent. With the load-step, these two control loops change.

The battery voltage and current overshoot are generated by the delay time of the control loop when the mode changes. The delay time is determined by phase compensation constant. When the battery is removed if the charge control is switched from the constant current control to the constant voltage control, and the charging voltage does overshoot by generating the period controlled with high duty by output setting voltage. The excessive voltage is not applied to the battery because the battery is not connected.

When the battery is connected if the charge control is switched from the constant voltage control to the constant current control, and the charging current does overshoot by generating the period controlled with high duty by charge current setting.

The battery pack manufacturer in Japan thinks it is not the problem the current overshoot of 10 ms or less.

### • Timing chart at load-step

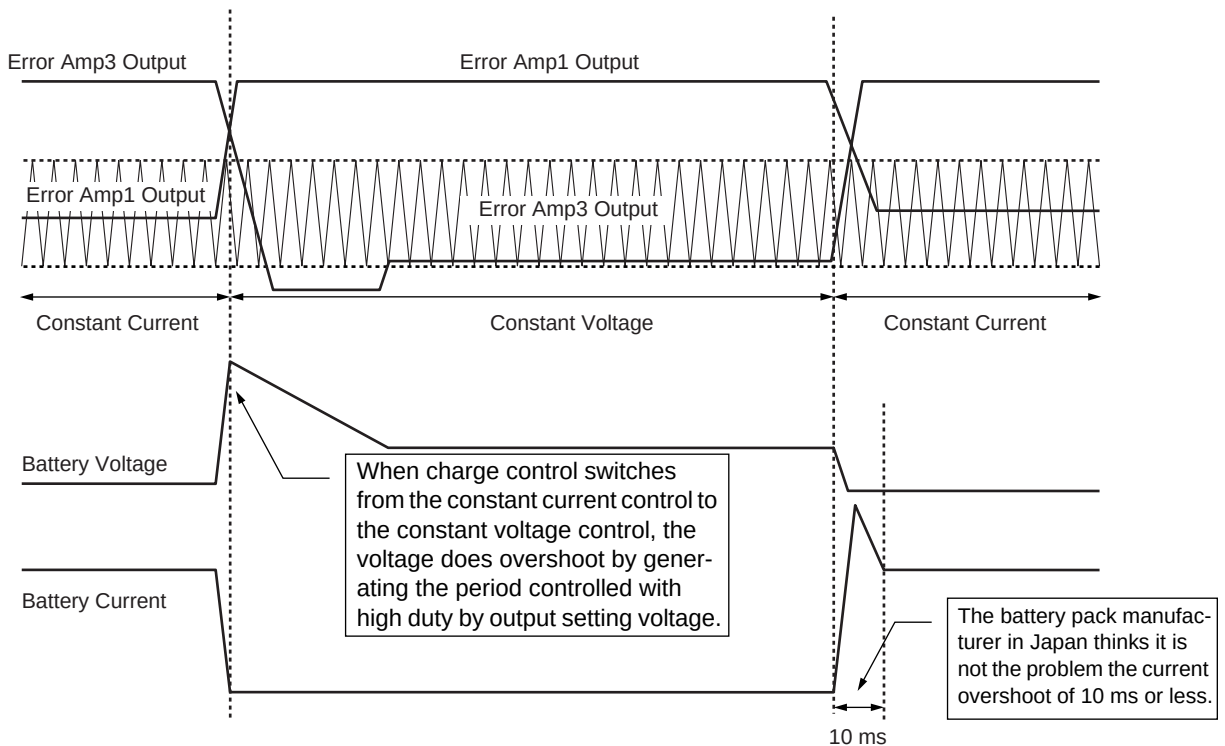


## ■ AC ADAPTER DETECTION FUNCTION

When ACIN terminal (pin 7) voltage is lower than 1.3 V (Typ) , AC adapter voltage detection block (AC Comp.) outputs "Hi-Z" level to the ACOK terminal (pin 5) and outputs "L" level to the XACOK terminal (pin 18) . When CTL terminal (pin 14) is set to "L" level, ACOK terminal (pin 5) and XACOK terminal (pin 18) are fixed to "Hi-Z" level.

### (1) AC adapter presence

If you connect as shown in the figure below the presence of AC adapter can be easily detected because the signal is output from the ACOK terminal (pin 5) to microcomputer etc. In this case, if the CTL terminal is set to "L" level, IC becomes the standby state ( $I_{CC} = 0 \mu A$  Typ).


#### • Connection example of detecting AC adapter presence

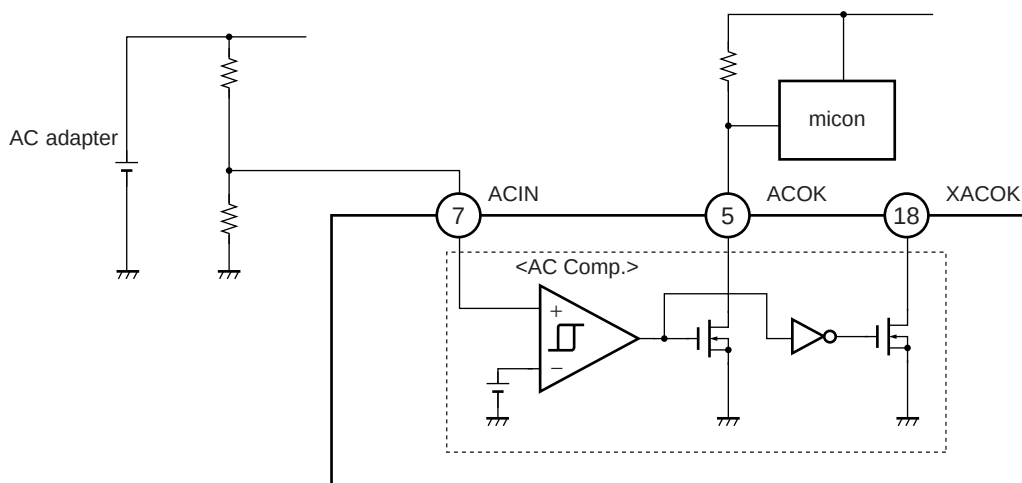

**(2) Automatic changing system power supply between AC adapter and battery**

The AC adapter voltage is detected and external switch at input side and battery side can be changed automatically with the connection as follows. Connect CTL terminal (pin 14) to VCC terminal (pin 21) for this function. OFF duty cycle becomes 100% when CS terminal (pin 22) voltage is made to be 0 V, if it is needed after full charge.

- Connection example of automatic changing system power supply between AC adapter and battery

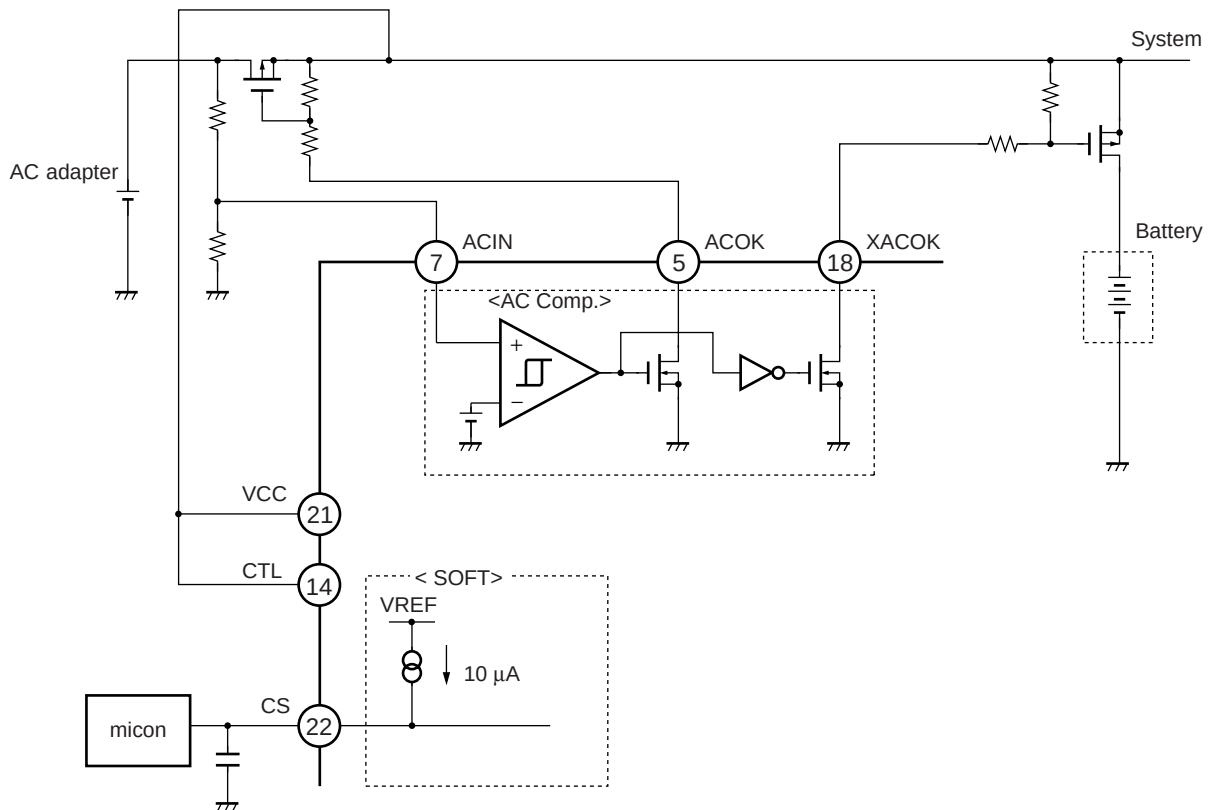


# MB39A125/126

[查询"MB39A125"供应商](#)

## (3) Battery selector function

When control signal from microcomputer etc. is input to ACIN terminal (pin 7) as shown in the following diagram, ACOK terminal (pin 5) output voltage and XACOK terminal (pin 18) output voltage are controlled to select one of the two batteries for charge. Connect CTL terminal (pin 14) to VCC terminal (pin 21) for this function. OFF duty cycle becomes 100% when CS terminal (pin 22) voltage is made to be 0 V, if it is needed after full charge.

### • Connection example of battery selector function

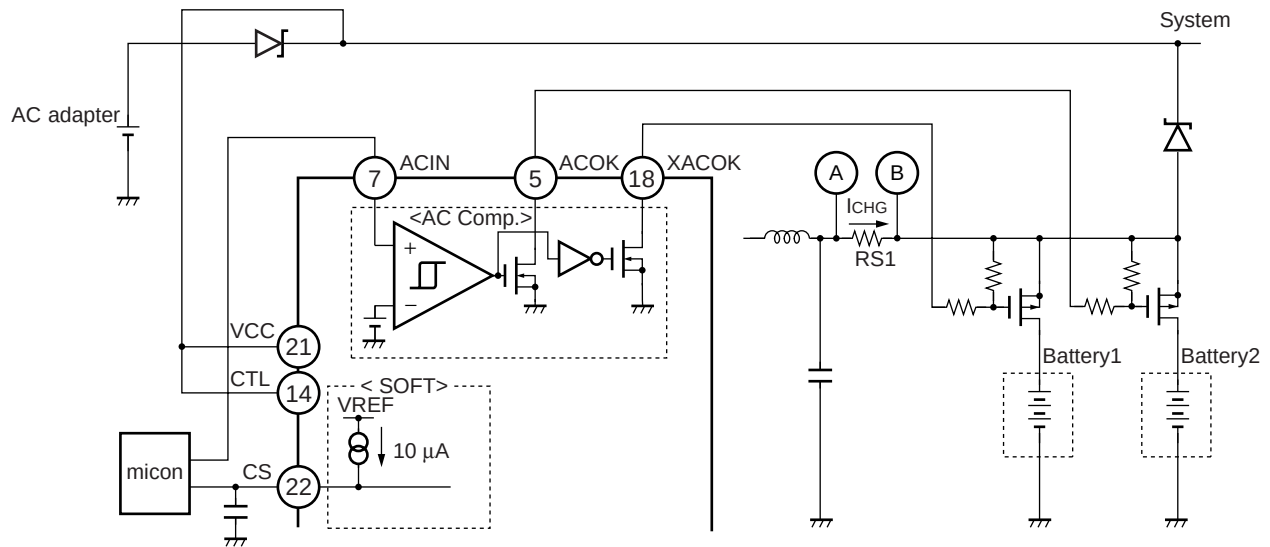


## (4) When AC Comp. is not used

When AC Comp. (ACIN (pin 7) , ACOK (pin 5) , and XACOK (pin 18) terminals) is not used as follows, connect the ACIN (pin 7) , ACOK (pin 5) , and XACOK (pin 18) terminals to GND terminal (pin 23) .

And connect VCC terminal (pin 21) to system, as follows, to avoid the reverse current from the battery to the VCC terminal (pin 21) .

### • Connection example when AC Comp. is not used

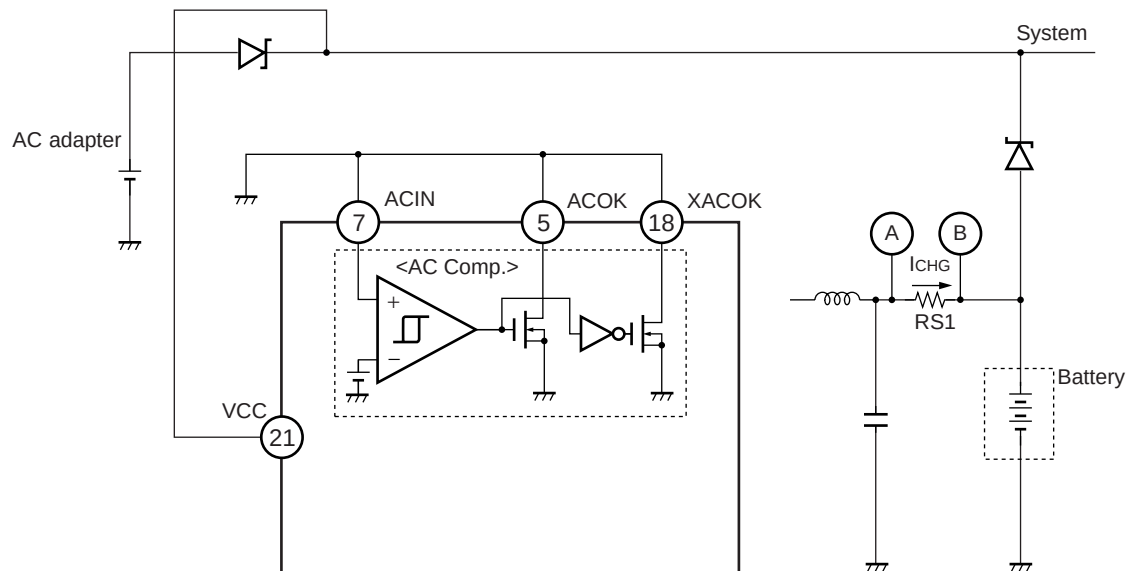


# MB39A125/126

[查询"MB39A125"供应商](#)

## ■ PHASE COMPENSATION

### • Example Circuit

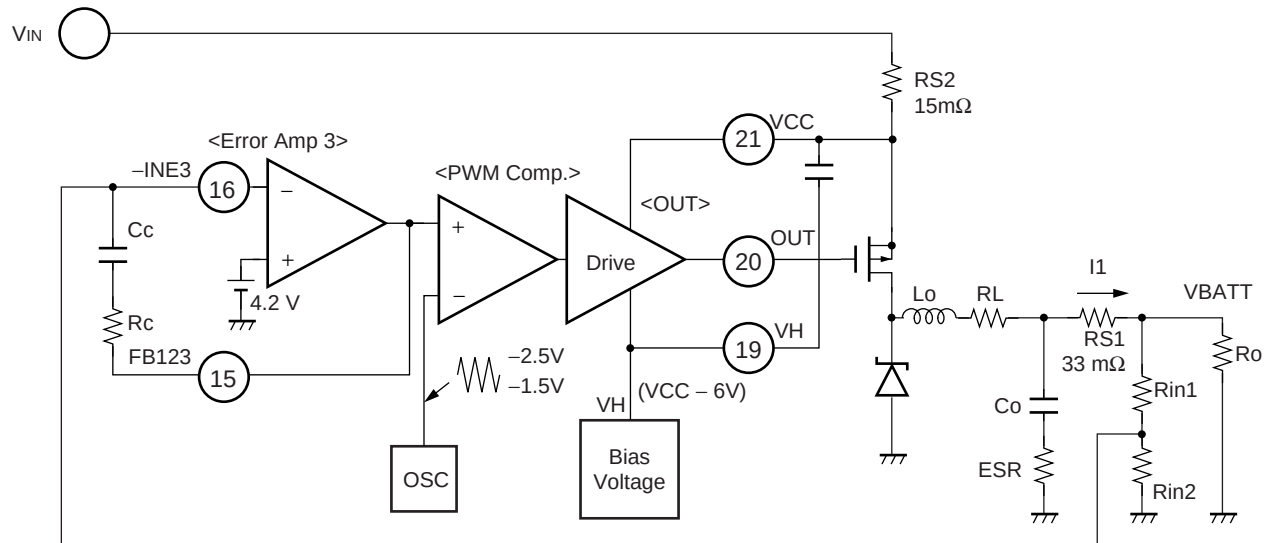

Lo : Inductance


RL : Equivalent series resistance of inductance

Co : Capacity of condenser

ESR : Equivalent series resistance of condenser

Ro : Load resistance

### • Frequency Characteristics of LC filter

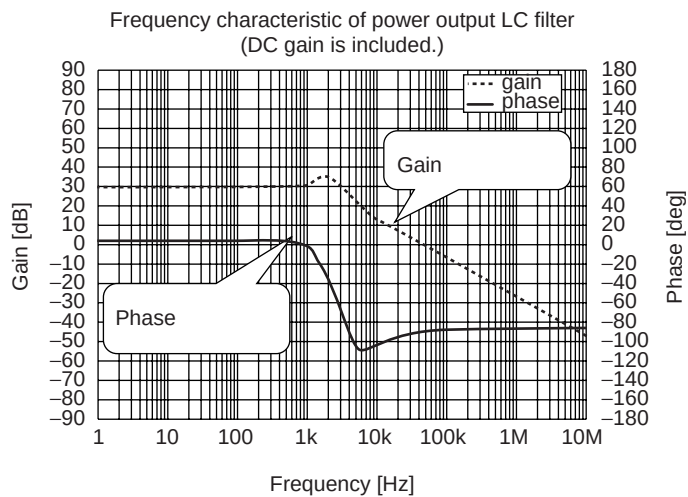

### Cut-off frequency

$$f_1 \text{ (Hz)} = \frac{1}{2\pi \sqrt{L_o \times C_o \times \frac{(R_o + \text{ESR})}{(R_o + R_L)}}}$$

$$L_o = 15 \mu\text{H}$$


$$C_o = 14.1 \mu\text{F}$$

$$R_o = 4.2 \Omega$$

$$R_L = 30 \text{ m}\Omega$$

$$\text{ESR} = 100 \text{ m}\Omega$$

## • Frequency Characteristics of Error Amp

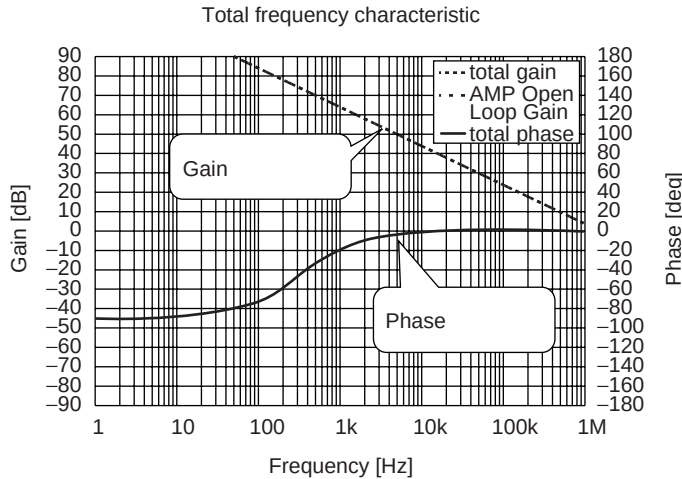


Cut-off frequency

$$f_2(\text{Hz}) = \frac{1}{2\pi \times R_c \times C_c}$$

$R_c = 150 \text{ k}\Omega$

$C_c = 3300 \text{ pF}$

## • Frequency Characteristics of DC/DC converter

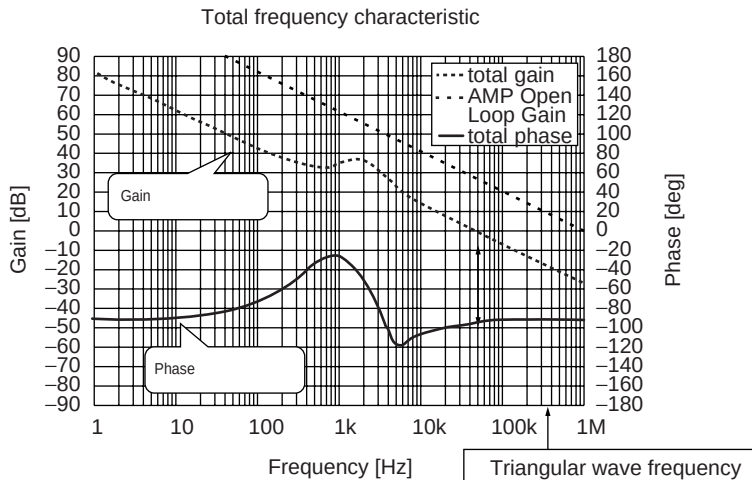

The overview of frequency characteristic for DC/DC converter can be obtained in combination between “Frequency Characteristics of LC filter” and “Frequency Characteristics of Error Amp” as mentioned above.

Please note the following point in order to stabilize the frequency characteristics of DC/DC converter .

Cut-off frequency of DC/DC converter should be set to half or less of the triangular wave oscillator frequency.

Notes : 1) Please review the Error Amp frequency characteristics, when LC filter parameter is modified.


2) When the ceramic capacitor is used as smoothing capacitor  $C_o$ , phase margin is reduced because ESR of the ceramic capacitor is extremely small as shown in “Frequency Characteristics of LC filter which is using low ESR”.

Therefore, change phase compensation of Error Amp or create resistance equivalent to ESR using pattern.

# MB39A125/126

[查询"MB39A125"供应商](#)

- Frequency Characteristics of LC filter which is using low ESR

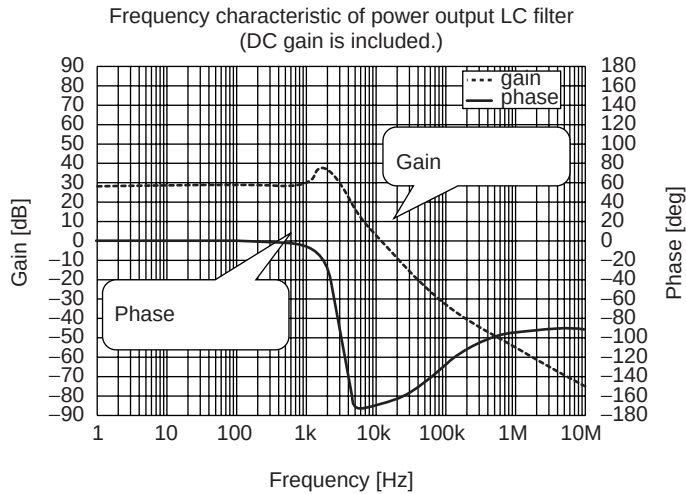


Cut-off frequency


$$f_1 \text{ (Hz)} = \frac{1}{2\pi \sqrt{L_o \times C_o \times \frac{(R_o + \text{ESR})}{(R_o + R_L)}}}$$

$L_o = 15 \mu\text{H}$   
 $C_o = 14.1 \mu\text{F}$   
 $R_o = 4.2 \Omega$   
 $R_L = 30 \text{ m}\Omega$   
 $\text{ESR} = 100 \text{ m}\Omega$

<3Pole2Zero>  
DC/DC output

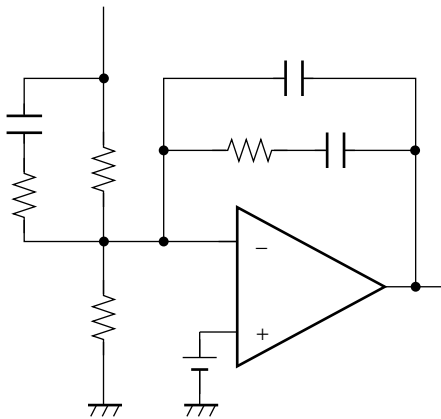

< Additional ESR >

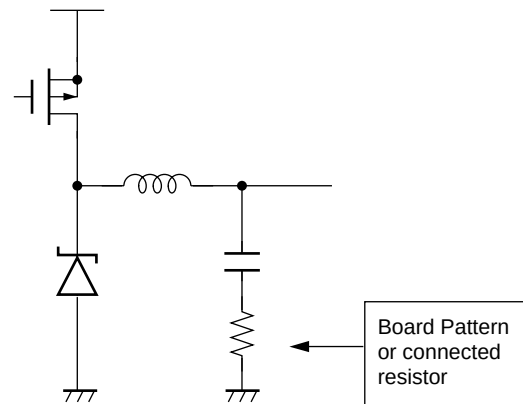




## ■ PROCESSING WITHOUT USING OF THE CURRENT AMP1 AND AMP2

When Current Amp is not used, connect the +INC1 terminal (pin 13) , +INC2 terminal (pin 24) , -INC1 terminal (pin 12) , and -INC2 terminal (pin 1) to VREF terminal (pin 6) , and then leave OUTC1 terminal (pin 10) and OUTC2 terminal (pin 2) open.


### • Connection when Current Amp is not used

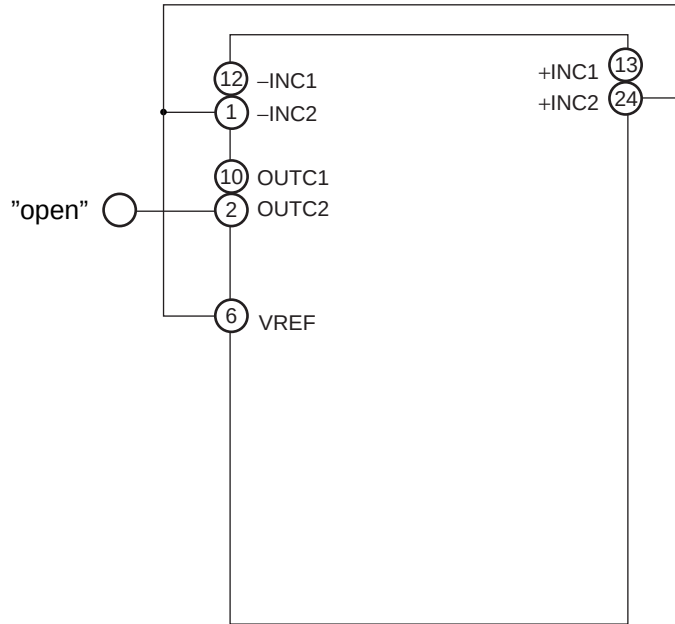

## ■ PROCESSING WITHOUT USING OF THE ERROR AMP1 AND AMP2

When Error Amp is not used, leave FB123 terminal (pin 15) open, connect the -INE1 terminal (pin 8) and -INE2 terminal (pin 4) to GND, and connect +INE1 terminal (pin 9) and +INE2 terminal (pin 3) to VREF terminal (pin 6) .

### • Connection when Error Amp is not used

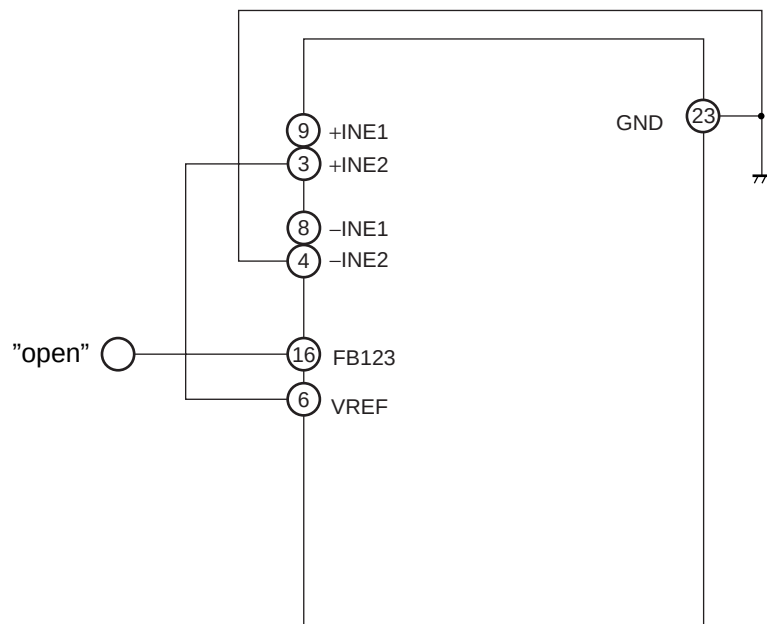


# MB39A125/126

[查询"MB39A125"供应商](#)

## ■ PROCESSING WITHOUT USING OF THE CS TERMINAL


When soft-start function is not used, leave the CS terminal (pin 22) open.

- Connection when no soft-start time is specified

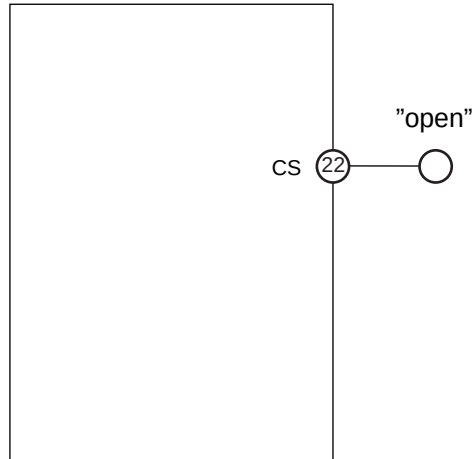


## I/O EQUIVALENT CIRCUIT


### • <Reference voltage block>

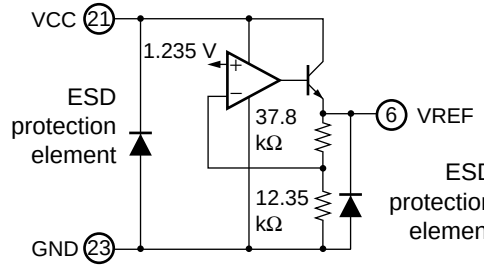


### • <Power supply control block>




### • <Soft-start block>




### • <Triangular wave oscillator block>

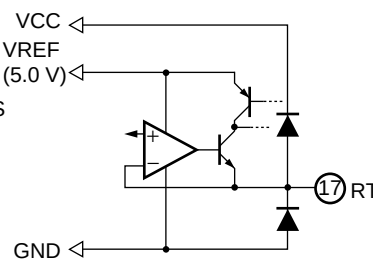


### • <Error amplifier block (Error Amp1) >

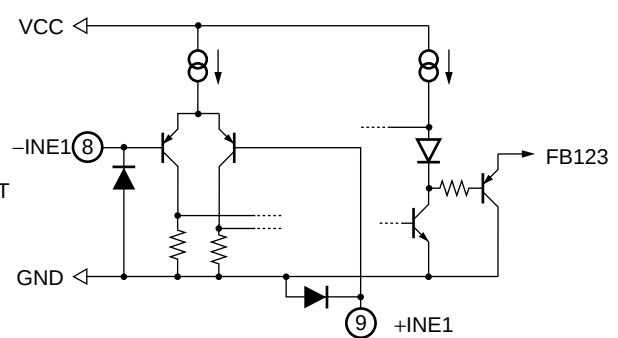


### • <Error amplifier block (Error Amp2) >

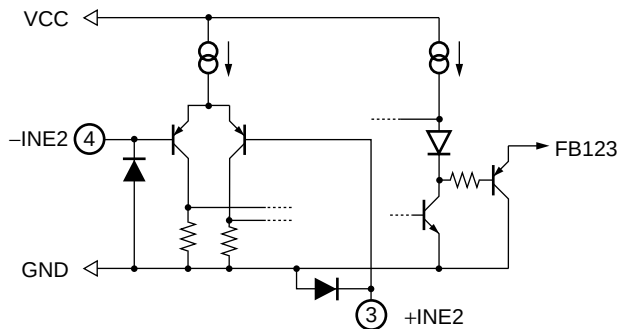


### • <Error amplifier block (Error Amp3) >

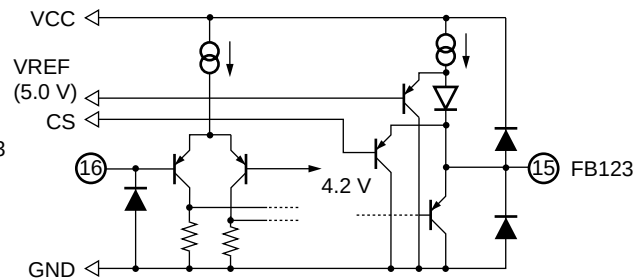

### • <Current detection amplifier block (Current Amp1) >

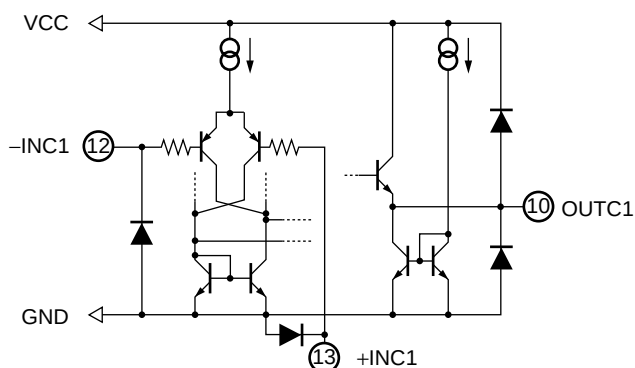

### • <Current detection amplifier block (Current Amp2) >

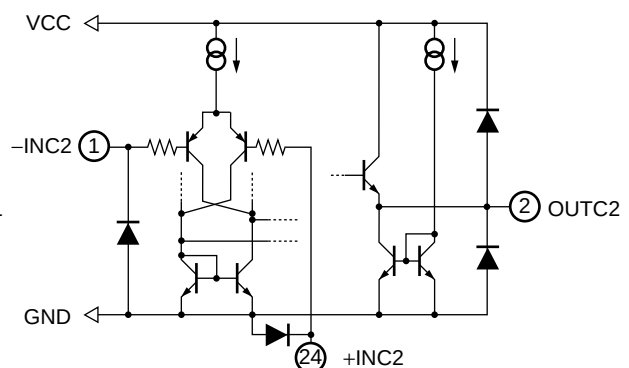


(Continued)

# MB39A125/126


[查询"MB39A125"供应商](#)

(Continued)


• <PWM comparator block>

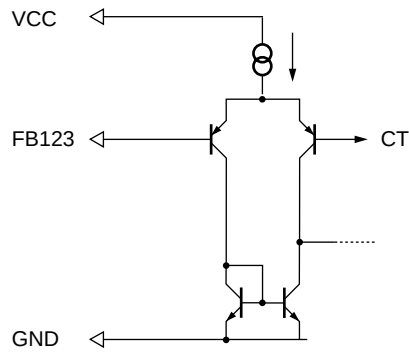


• <Output block>

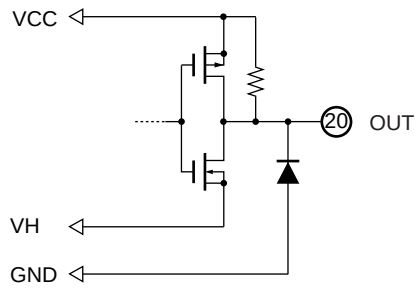


• <AC adapter voltage detection block>

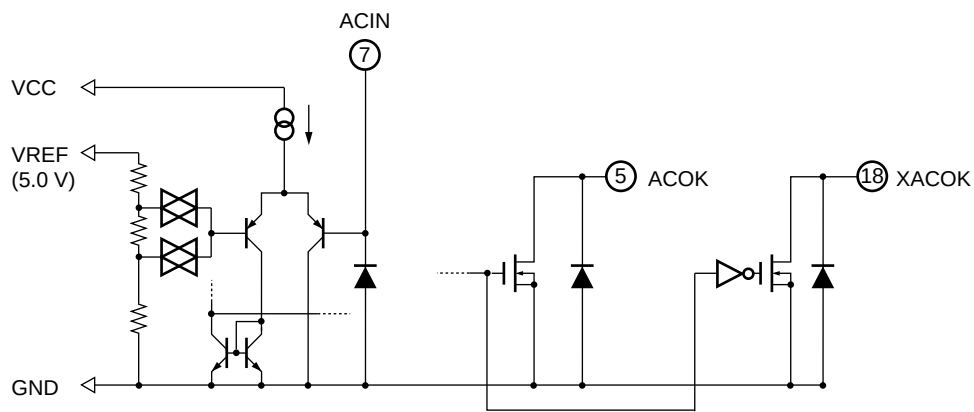


• <Bias voltage block>

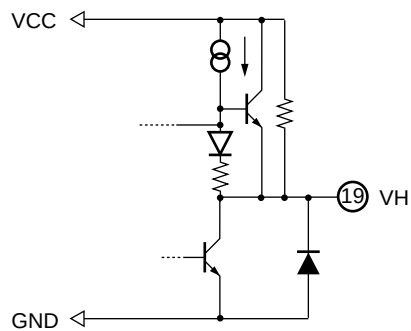

• <Invalidity current prevention block>  
<MB39A125>




• <Output voltage switching function block>  
<MB39A126>



## ■ APPLICATION EXAMPLE 1

### ● MB39A125

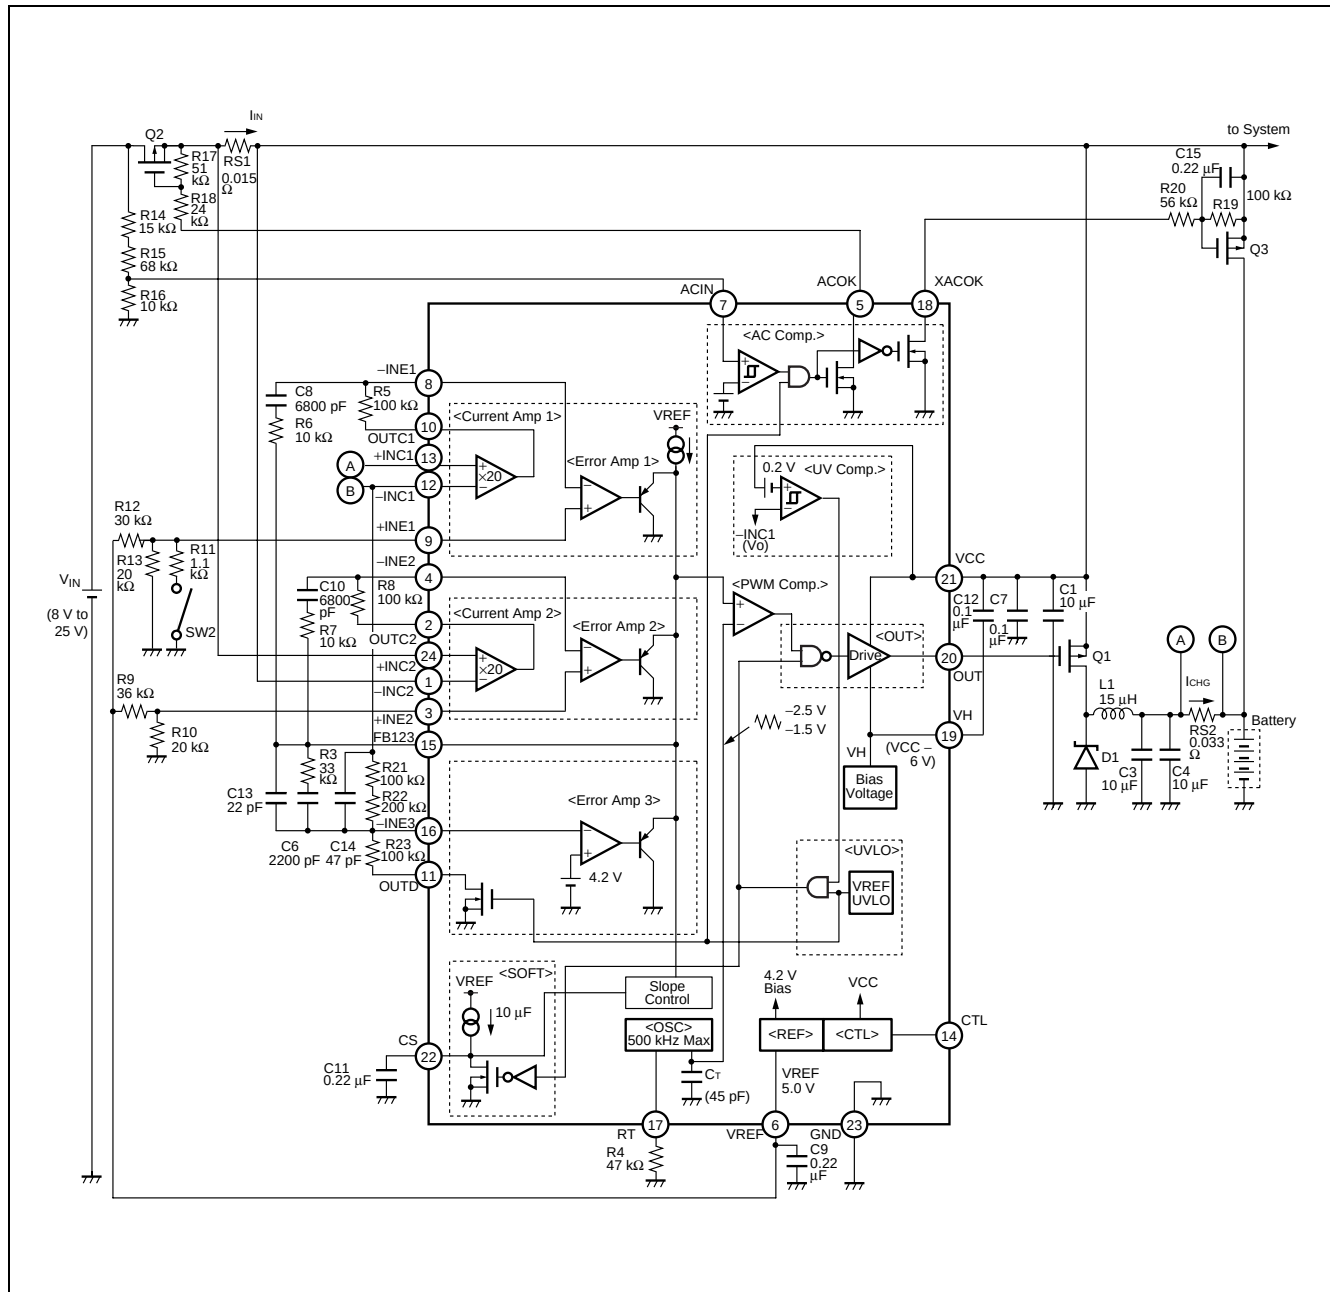

# MB39A125/126

[查询"MB39A125"供应商](#)

## ■ PARTS LIST 1


### • MB39A125

| COMPONENT     | ITEM               | SPECIFICATION                   |              | VENDOR | PARTS No.      |
|---------------|--------------------|---------------------------------|--------------|--------|----------------|
| Q1, Q2, Q3    | Pch FET            | VDS = -30 V, ID = -7.0 A        |              | NEC    | μPA2714GR      |
| D1            | Diode              | VF = 0.42 V (Max) , At IF = 3 A |              | ROHM   | RB053L-30      |
| L1            | Inductor           | 15 μH                           | 3.6 A, 50 mΩ | SUMIDA | CDRH104R-150   |
| C1, C3, C4    | Ceramics Condenser | 10 μF                           | 25 V         | TDK    | C3225X5R1E106K |
| C6            | Ceramics Condenser | 2200 pF                         | 50 V         | TDK    | C1608JB1H222K  |
| C7, C12       | Ceramics Condenser | 0.1 μF                          | 50 V         | TDK    | C1608JB1H104K  |
| C8, C10       | Ceramics Condenser | 6800 pF                         | 50 V         | TDK    | C1608JB1H682K  |
| C9, C11       | Ceramics Condenser | 0.22 μF                         | 16 V         | TDK    | C1608JB1C224K  |
| C13           | Ceramics Condenser | 22 pF                           | 50 V         | TDK    | C1608CH1H220J  |
| C14           | Ceramics Condenser | 47 pF                           | 50 V         | TDK    | C1608CH1H470J  |
| C15           | Ceramics Condenser | 0.22 μF                         | 25 V         | TDK    | C2012JB1E224K  |
| RS1           | Resistor           | 15 mΩ                           | 1%           | KOA    | SL1TTE15LOF    |
| RS2           | Resistor           | 33 mΩ                           | 1%           | KOA    | SL1TTE33LOF    |
| R3            | Resistor           | 33 kΩ                           | 0.5%         | ssm    | RR0816P-333-D  |
| R4            | Resistor           | 47 kΩ                           | 0.5%         | ssm    | RR0816P-473-D  |
| R5, R8        | Resistor           | 100 kΩ                          | 0.5%         | ssm    | RR0816P-104-D  |
| R6, R7        | Resistor           | 10 kΩ                           | 0.5%         | ssm    | RR0816P-103-D  |
| R9            | Resistor           | 36 kΩ                           | 0.5%         | ssm    | RR0816P-363-D  |
| R10           | Resistor           | 20 kΩ                           | 0.5%         | ssm    | RR0816P-203-D  |
| R11           | Resistor           | 1.1 kΩ                          | 0.5%         | ssm    | RR0816P-112-D  |
| R12           | Resistor           | 30 kΩ                           | 0.5%         | ssm    | RR0816P-303-D  |
| R13           | Resistor           | 20 kΩ                           | 0.5%         | ssm    | RR0816P-203-D  |
| R14           | Resistor           | 15 kΩ                           | 0.5%         | ssm    | RR0816P-153-D  |
| R15           | Resistor           | 68 kΩ                           | 0.5%         | ssm    | RR0816P-683-D  |
| R16           | Resistor           | 10 kΩ                           | 0.5%         | ssm    | RR0816P-103-D  |
| R17           | Resistor           | 51 kΩ                           | 0.5%         | ssm    | RR0816P-513-D  |
| R18           | Resistor           | 24 kΩ                           | 0.5%         | ssm    | RR0816P-243-D  |
| R19, R21, R23 | Resistor           | 100 kΩ                          | 0.5%         | ssm    | RR0816P-104-D  |
| R20           | Resistor           | 56 kΩ                           | 0.5%         | ssm    | RR0816P-563-D  |
| R22           | Resistor           | 200 kΩ                          | 0.5%         | ssm    | RR0816P-204-D  |

Note : NEC : NEC Corporation  
 ROHM : ROHM CO., LTD.  
 SUMIDA : Sumida Corporation  
 TDK : TDK Corporation  
 KOA : KOA Corporation  
 ssm : SUSUMU CO., LTD.

## APPLICATION EXAMPLE 2

### • MB39A126

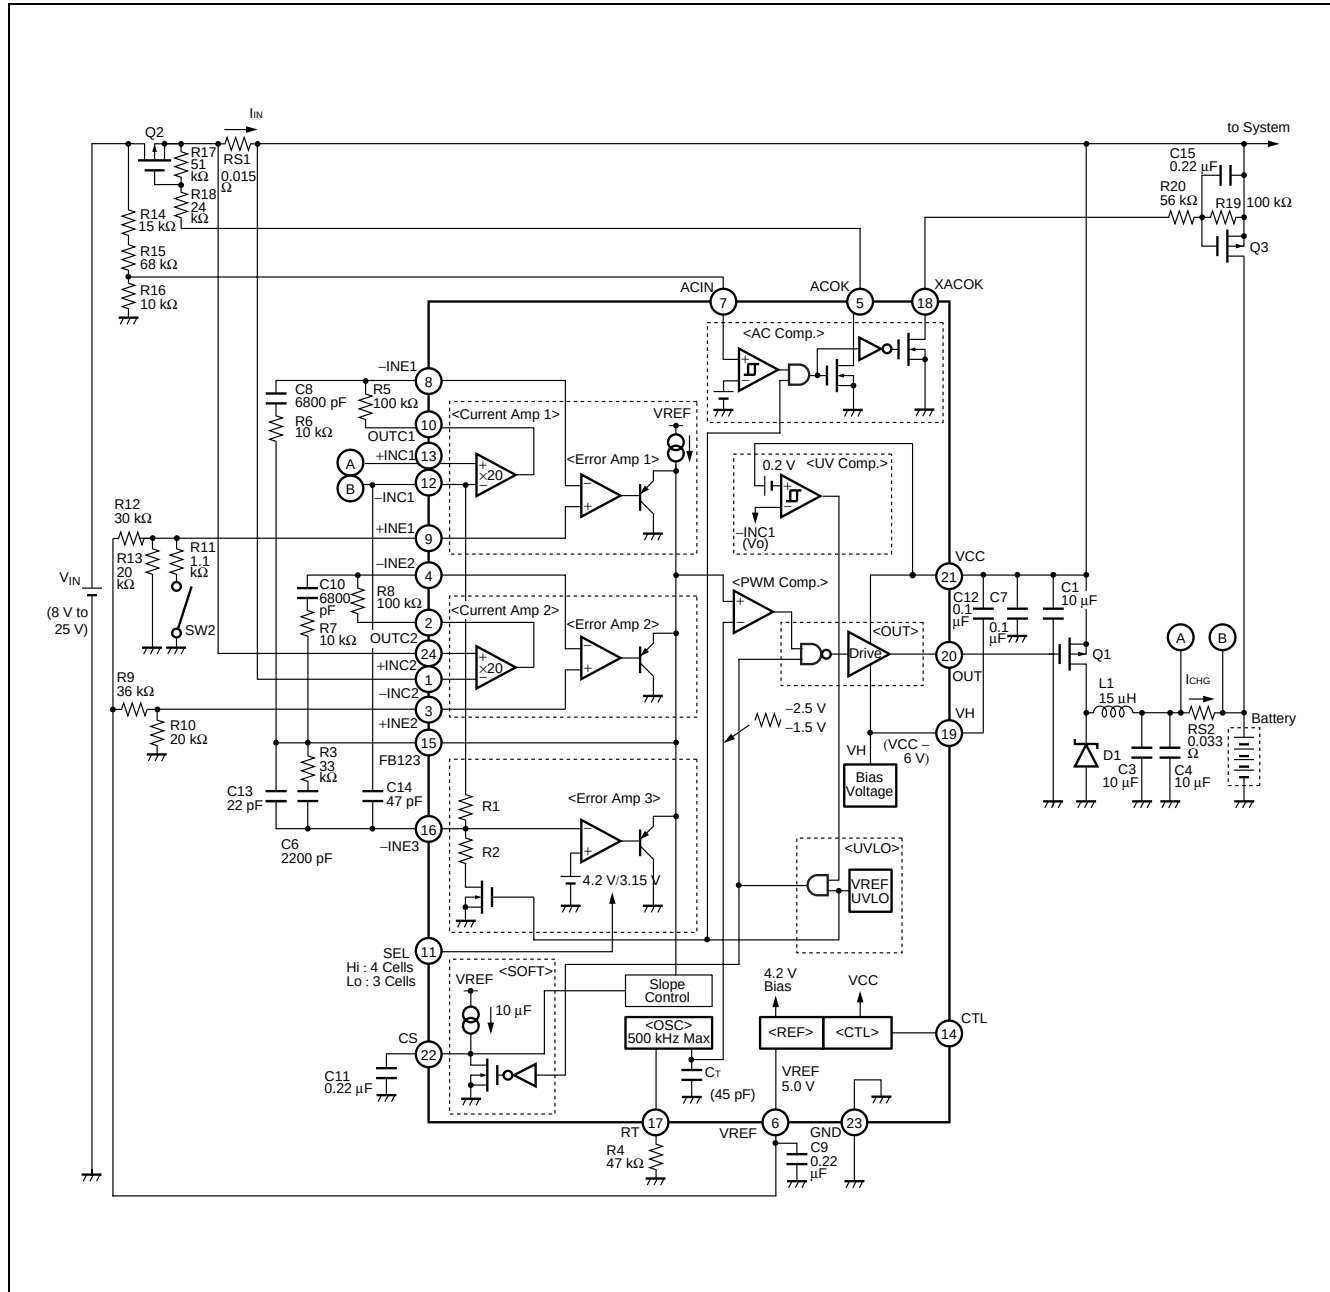

# MB39A125/126

[查询"MB39A125"供应商](#)

## ■ PARTS LIST 2

### • MB39A126

| COMPONENT  | ITEM               | SPECIFICATION                   |              | VENDOR | PARTS No.      |
|------------|--------------------|---------------------------------|--------------|--------|----------------|
| Q1, Q2, Q3 | Pch FET            | VDS = -30 V, ID = -7.0 A        |              | NEC    | μPA2714GR      |
| D1         | Diode              | VF = 0.42 V (Max) , At IF = 3 A |              | ROHM   | RB053L-30      |
| L1         | Inductor           | 15 μH                           | 3.6 A, 50 mΩ | SUMIDA | CDRH104R-150   |
| C1, C3, C4 | Ceramics Condenser | 10 μF                           | 25 V         | TDK    | C3225X5R1E106K |
| C6         | Ceramics Condenser | 2200 pF                         | 50 V         | TDK    | C1608JB1H222K  |
| C7, C12    | Ceramics Condenser | 0.1 μF                          | 50 V         | TDK    | C1608JB1H104K  |
| C8, C10    | Ceramics Condenser | 6800 pF                         | 50 V         | TDK    | C1608JB1H682K  |
| C9, C11    | Ceramics Condenser | 0.22 μF                         | 16 V         | TDK    | C1608JB1C224K  |
| C13        | Ceramics Condenser | 22 pF                           | 50 V         | TDK    | C1608CH1H220J  |
| C14        | Ceramics Condenser | 47 pF                           | 50 V         | TDK    | C1608CH1H470J  |
| C15        | Ceramics Condenser | 0.22 μF                         | 25 V         | TDK    | C2012JB1E224K  |
| RS1        | Resistor           | 15 mΩ                           | 1%           | KOA    | SL1TTE15LOF    |
| RS2        | Resistor           | 33 mΩ                           | 1%           | KOA    | SL1TTE33LOF    |
| R3         | Resistor           | 33 kΩ                           | 0.5%         | ssm    | RR0816P-333-D  |
| R4         | Resistor           | 47 kΩ                           | 0.5%         | ssm    | RR0816P-473-D  |
| R5, R8     | Resistor           | 100 kΩ                          | 0.5%         | ssm    | RR0816P-104-D  |
| R6, R7     | Resistor           | 10 kΩ                           | 0.5%         | ssm    | RR0816P-103-D  |
| R9         | Resistor           | 36 kΩ                           | 0.5%         | ssm    | RR0816P-363-D  |
| R10        | Resistor           | 20 kΩ                           | 0.5%         | ssm    | RR0816P-203-D  |
| R11        | Resistor           | 1.1 kΩ                          | 0.5%         | ssm    | RR0816P-112-D  |
| R12        | Resistor           | 30 kΩ                           | 0.5%         | ssm    | RR0816P-303-D  |
| R13        | Resistor           | 20 kΩ                           | 0.5%         | ssm    | RR0816P-203-D  |
| R14        | Resistor           | 15 kΩ                           | 0.5%         | ssm    | RR0816P-153-D  |
| R15        | Resistor           | 68 kΩ                           | 0.5%         | ssm    | RR0816P-683-D  |
| R16        | Resistor           | 10 kΩ                           | 0.5%         | ssm    | RR0816P-103-D  |
| R17        | Resistor           | 51 kΩ                           | 0.5%         | ssm    | RR0816P-513-D  |
| R18        | Resistor           | 24 kΩ                           | 0.5%         | ssm    | RR0816P-243-D  |
| R19        | Resistor           | 100 kΩ                          | 0.5%         | ssm    | RR0816P-104-D  |
| R20        | Resistor           | 56 kΩ                           | 0.5%         | ssm    | RR0816P-563-D  |

Note : NEC : NEC Corporation  
 ROHM : ROHM CO., LTD.  
 SUMIDA : Sumida Corporation  
 TDK : TDK Corporation  
 KOA : KOA Corporation  
 ssm : SUSUMU CO., LTD.



## ■ SELECTION OF COMPONENTS

### • Pch MOS FET

The Pch MOS FET for switching use should be rated for at least +20% more than the input voltage. To minimize continuity loss, use a FET with low  $R_{DS(ON)}$  between the drain and source. For high input voltage and high frequency operation, on-cycle switching loss will be higher so that power dissipation must be considered. In this application, the NEC  $\mu$ PA2714GR is used. Continuity loss, on/off switching loss, and total loss are determined by the following formulas. The selection must ensure that peak drain current does not exceed rated values.

Continuity loss :  $P_C$

$$P_C = I_D^2 \times R_{DS(ON)} \times \text{Duty}$$

On-cycle switching loss :  $P_{S(ON)}$

$$P_{S(ON)} = \frac{V_{D(Max)} \times I_D \times t_r \times f_{osc}}{6}$$

Off-cycle switching loss :  $P_{S(OFF)}$

$$P_{S(OFF)} = \frac{V_{D(Max)} \times I_{D(Max)} \times t_f \times f_{osc}}{6}$$

Total loss :  $P_T$

$$P_T = P_C + P_{S(ON)} + P_{S(OFF)}$$

Example) Using the  $\mu$ PA2714GR  
16.8 V setting

Input voltage  $V_{IN(Max)} = 25$  V, output voltage  $V_O = 16.8$  V, drain current  $I_D = 3$  A, oscillation frequency  $f_{osc} = 300$  kHz,  $L = 15$   $\mu$ H, drain-source on resistance  $R_{DS(ON)} \approx 18$  m $\Omega$ ,  $t_r \approx 15$  ns,  $t_f \approx 42$  ns

Drain current (Max) :  $I_{D(Max)}$

$$\begin{aligned} I_{D(Max)} &= I_O + \frac{V_{IN} - V_O}{2L} t_{ON} \\ &= 3 + \frac{25 - 16.8}{2 \times 15 \times 10^{-6}} \times \frac{1}{300 \times 10^3} \times 0.672 \\ &\approx \underline{3.6 \text{ A}} \end{aligned}$$

Drain current (Min) :  $I_{D(Min)}$

$$\begin{aligned} I_{D(Min)} &= I_O - \frac{V_{IN} - V_O}{2L} t_{ON} \\ &= 3 - \frac{25 - 16.8}{2 \times 15 \times 10^{-6}} \times \frac{1}{300 \times 10^3} \times 0.672 \\ &\approx \underline{2.4 \text{ A}} \end{aligned}$$

# MB39A125/126

[查询“MB39A125”供应商](#)

$$\begin{aligned}P_C &= I_D^2 \times R_{DS(ON)} \times \text{Duty} \\&= 3^2 \times 0.018 \times 0.672 \\&\doteq \underline{0.109 \text{ W}}\end{aligned}$$

$$\begin{aligned}P_{S(ON)} &= \frac{V_D \times I_D \times t_r \times f_{osc}}{6} \\&= \frac{25 \times 3 \times 15 \times 10^{-9} \times 300 \times 10^3}{6} \\&\doteq \underline{0.056 \text{ W}}\end{aligned}$$

$$\begin{aligned}P_{S(OFF)} &= \frac{V_D \times I_{D(Max)} \times t_f \times f_{osc}}{6} \\&= \frac{25 \times 3.6 \times 42 \times 10^{-9} \times 300 \times 10^3}{6} \\&\doteq \underline{0.189 \text{ W}}\end{aligned}$$

$$\begin{aligned}P_T &= P_C + P_{S(ON)} + P_{S(OFF)} \\&\doteq 0.109 + 0.056 + 0.189 \\&\doteq \underline{0.354 \text{ W}}\end{aligned}$$

The above power dissipation figures for the  $\mu$ PA2714GR are satisfied with ample margin at 2.0 W.

## 12.6 V setting

Input voltage  $V_{IN(Max)} = 22 \text{ V}$ , output voltage  $V_O = 12.6 \text{ V}$ , drain current  $I_D = 3 \text{ A}$ , oscillation frequency  $f_{osc} = 300 \text{ kHz}$ ,  $L = 15 \mu\text{H}$ , drain-source on resistance  $R_{DS(ON)} \doteq 18 \text{ m}\Omega$ ,  $t_r \doteq 15 \text{ ns}$ ,  $t_f \doteq 42 \text{ ns}$

Drain current (Max) :  $I_{D(Max)}$

$$\begin{aligned}I_{D(Max)} &= I_O + \frac{V_{IN} - V_O}{2L} t_{ON} \\&= 3 + \frac{22 - 12.6}{2 \times 15 \times 10^{-6}} \times \frac{1}{300 \times 10^3} \times 0.572 \\&\doteq \underline{3.6 \text{ A}}\end{aligned}$$

Drain current (Min) :  $I_{D(Min)}$

$$\begin{aligned}I_{D(Min)} &= I_O - \frac{V_{IN} - V_O}{2L} t_{ON} \\&= 3 - \frac{22 - 12.6}{2 \times 15 \times 10^{-6}} \times \frac{1}{300 \times 10^3} \times 0.572 \\&\doteq \underline{2.4 \text{ A}}\end{aligned}$$

$$\begin{aligned}
 P_C &= I_D^2 \times R_{DS(ON)} \times \text{Duty} \\
 &= 3^2 \times 0.018 \times 0.572 \\
 &\div \underline{0.093 \text{ W}}
 \end{aligned}$$

$$\begin{aligned}
 P_{S(ON)} &= \frac{V_D \times I_D \times t_r \times f_{osc}}{6} \\
 &= \frac{22 \times 3 \times 15 \times 10^{-9} \times 300 \times 10^3}{6} \\
 &\div \underline{0.050 \text{ W}}
 \end{aligned}$$

$$\begin{aligned}
 P_{S(OFF)} &= \frac{V_D \times I_{D(Max)} \times t_f \times f_{osc}}{6} \\
 &= \frac{22 \times 3.6 \times 42 \times 10^{-9} \times 300 \times 10^3}{6} \\
 &\div \underline{0.166 \text{ W}}
 \end{aligned}$$

$$\begin{aligned}
 P_T &= P_C + P_{S(ON)} + P_{S(OFF)} \\
 &\div 0.093 + 0.050 + 0.166 \\
 &\div \underline{0.309 \text{ W}}
 \end{aligned}$$

The above power dissipation figures for the  $\mu$ PA2714GR are satisfied with ample margin at 2.0 W.

The Pch MOS FET for switching use must use the one of more than input voltage +20%.

FET which operates when the AC adapter is connected should select FET which satisfies the current decided by sense resistance R1 enough. Because FET which operates when the AC adapter is not connected becomes a supply by the battery, it is necessary to select FET which satisfies the current of the system enough.

In this application, the NEC  $\mu$ PA2714GR is used.

## • Inductor

In selecting inductors, it is of course essential not to apply more current than the rated capacity of the inductor, but also to note that the lower limit for ripple current is a critical point that if reached will cause discontinuous operation and a considerable drop in efficiency. This can be prevented by choosing a higher inductance value, which will enable continuous operation under light-loads.

Note that if the inductance value is too high, however, direct current resistance (DCR) is increased and this will also reduce efficiency. The inductance must be set at the point where efficiency is greatest.

Note also that the DC superimposition characteristic becomes worse as the load current value approaches the rated current value of the inductor, so that the inductance value is reduced and ripple current increases, causing loss of efficiency.

The selection of rated current value and inductance value will vary depending on where the point of peak efficiency lies with respect to load current.

Inductance values are determined by the following formulas.

The L value for all load current conditions is set so that the peak to peak value of the ripple current is 1/2 the load current or less.

# MB39A125/126

[查询"MB39A125"供应商](#)

Inductance value : L

$$L \geq \frac{2 (V_{IN} - V_o)}{I_o} t_{ON}$$

16.8 V output

Example)

$$\begin{aligned} L &\geq \frac{2 (V_{IN (Max)} - V_o)}{I_o} t_{ON} \\ &\geq \frac{2 \times (25 - 16.8)}{3} \times \frac{1}{300 \times 10^3} \times 0.672 \\ &\geq \underline{12.2 \mu H} \end{aligned}$$

12.6 V output

Example)

$$\begin{aligned} L &\geq \frac{2 (V_{IN (Max)} - V_o)}{I_o} t_{ON} \\ &\geq \frac{2 \times (22 - 12.6)}{3} \times \frac{1}{300 \times 10^3} \times 0.572 \\ &\geq \underline{12.0 \mu H} \end{aligned}$$

Inductance values derived from the above formulas are values that provide sufficient margin for continuous operation at maximum load current, but at which continuous operation is not possible at light loads. It is therefore necessary to determine the load level at which continuous operation becomes possible. In this application, the SUMIDA CDRH104R-150 is used. The following formula is available to obtain the load current as a continuous current condition when 15  $\mu H$  is used.

The value of the load current satisfying the continuous current condition :  $I_o$

$$I_o \geq \frac{V_o}{2L} t_{OFF}$$

Example) Using the CDRH104R-150

15  $\mu H$  (tolerance  $\pm 30\%$ ) , rated current = 3.6 A

16.8 V output

$$\begin{aligned} I_o &\geq \frac{V_o}{2L} t_{OFF} \\ &\geq \frac{16.8}{2 \times 15 \times 10^{-6}} \times \frac{1}{300 \times 10^3} \times (1 - 0.672) \\ &\geq \underline{0.61 A} \end{aligned}$$

12.6 V output

$$\begin{aligned}
 I_o &\geq \frac{V_o}{2L} t_{OFF} \\
 &\geq \frac{12.6}{2 \times 15 \times 10^{-6}} \times \frac{1}{300 \times 10^3} \times (1 - 0.572) \\
 &\geq \underline{0.60 \text{ A}}
 \end{aligned}$$

To determine whether the current through the inductor is within rated values, it is necessary to determine the peak value of the ripple current as well as the peak-to-peak values of the ripple current that affects the output ripple voltage. The peak value and peak-to-peak value of the ripple current can be determined by the following formulas.

Peak Value :  $I_L$

$$I_L \geq I_o + \frac{V_{IN} - V_o}{2L} t_{ON}$$

Peak-to-peak Value :  $\Delta I_L$

$$\Delta I_L = \frac{V_{IN} - V_o}{L} t_{ON}$$

Example) Using the CDRH104R-150

15  $\mu$ H (tolerance  $\pm 30\%$ ) , rated current = 3.6 A

Peak Value

16.8 V output

$$\begin{aligned}
 I_L &\geq I_o + \frac{V_{IN} - V_o}{2L} t_{ON} \\
 &\geq 3 + \frac{25 - 16.8}{2 \times 15 \times 10^{-6}} \times \frac{1}{300 \times 10^3} \times 0.672 \\
 &\geq \underline{3.6 \text{ A}}
 \end{aligned}$$

12.6 V output

$$\begin{aligned}
 I_L &\geq I_o + \frac{V_{IN} - V_o}{2L} t_{ON} \\
 &\geq 3 + \frac{22 - 12.6}{2 \times 15 \times 10^{-6}} \times \frac{1}{300 \times 10^3} \times 0.572 \\
 &\geq \underline{3.6 \text{ A}}
 \end{aligned}$$

# MB39A125/126

[查询"MB39A125"供应商](#)

Peak-to-peak Value

16.8 V output

$$\begin{aligned}\Delta I_L &= \frac{V_{IN} - V_O}{L} t_{ON} \\ &= \frac{25 - 16.8}{15 \times 10^{-6}} \times \frac{1}{300 \times 10^3} \times 0.672 \\ &\doteq \underline{1.22 \text{ A}}\end{aligned}$$

12.6 V output

$$\begin{aligned}\Delta I_L &= \frac{V_{IN} - V_O}{L} t_{ON} \\ &= \frac{22 - 12.6}{15 \times 10^{-6}} \times \frac{1}{300 \times 10^3} \times 0.572 \\ &\doteq \underline{1.2 \text{ A}}\end{aligned}$$

## • Flyback diode

Shottky barrier diode (SBD) is generally used for the flyback diode when the reverse voltage to the diode is less than 40V. The SBD has the characteristics of higher speed in terms of faster reverse recovery time, and lower forward voltage, and is ideal for achieving high efficiency. As long as the DC reverse voltage is sufficiently higher than the input voltage, and the mean current flowing during the diode conduction time is within the mean output current level, and as the peak current is within the peak surge current limits, there is no problem. In this application the ROHM RB053L-30 are used. The diode mean current and diode peak current can be obtained by the following formulas.

Diode mean current :  $I_{Di}$

$$I_{Di} \geq I_O \times \left(1 - \frac{V_O}{V_{IN}}\right)$$

Diode peak current :  $I_{Dip}$

$$I_{Dip} \geq \left(I_O + \frac{V_O}{2L} t_{OFF}\right)$$

Example) Using the RB053L-30

$V_R$  (DC reverse voltage) = 30 V, mean output current = 3.0 A, peak surge current = 70 A,  
 $V_F$  (forward voltage) = 0.42 V, at  $I_F = 3.0$  A

16.8 V output

$$\begin{aligned}I_{Di} &\geq I_O \times \left(1 - \frac{V_O}{V_{IN}}\right) \\ &\geq 3 \times (1 - 0.672) \\ &\geq \underline{0.984 \text{ A}}\end{aligned}$$

12.6 V output

$$\begin{aligned} I_{Di} &\geq I_o \times \left(1 - \frac{V_o}{V_{IN}}\right) \\ &\geq 3 \times (1 - 0.572) \\ &\geq \underline{1.284 \text{ A}} \end{aligned}$$

16.8 V output

$$\begin{aligned} I_{Dip} &\geq \left(I_o + \frac{V_o}{2L} t_{OFF}\right) \\ &\geq \underline{3.6 \text{ A}} \end{aligned}$$

12.6 V output

$$\begin{aligned} I_{Dip} &\geq \left(I_o + \frac{V_o}{2L} t_{OFF}\right) \\ &\geq \underline{3.6 \text{ A}} \end{aligned}$$

## • Charge current sense resistor

Please note the following in selecting the charge current sense resistance. First of all, meet the electric power to the flowing current. However, the conversion efficiency deteriorates because the loss in the sense resistance grows when resistance is adjusted to a too big value. The accuracy of the charge current deteriorates because the voltage difference of both ends of the sense resistance becomes small when resistance is adjusted to a too small value oppositely. 33 mΩ of the KOA SL1TTE33LOF is used in this application. The sense resistance value can be determined by the following formulas.

In this application, 33 mΩ of the KOA SL1TTE33LOF is used.

Sense resistor : RS2

$$RS2 = \frac{+INE1}{20 \times I_o}$$

Example) When the +INE1 terminal (pin 9) voltage is 2 V and the charge current (I<sub>o</sub>) is 3.0 A

$$\begin{aligned} RS2 &= \frac{+INE1}{20 \times I_o} \\ &= \frac{2}{20 \times 3.0} \\ &= \underline{33.3 \text{ m}\Omega} \end{aligned}$$

# MB39A125/126

[查询"MB39A125"供应商](#)

- **Input current sense resistor**

Please note the following in selecting the input current sense resistance. First of all, meet the electric power to the flowing current. However, the conversion efficiency deteriorates because the loss in the sense resistance grows when resistance is adjusted to a too big value. The accuracy of the input current deteriorates because the voltage difference of both ends of the sense resistance becomes small when resistance is adjusted to a too small value oppositely. 33 mΩ of the KOA SL1TTE33LOF is used in this application. The sense resistance value can be determined by the following formulas.

In this application, 15 mΩ of the KOA SL1TTE15LOF is used.

Sense resistor : RS1







$$RS1 = \frac{+INE2}{20 \times I_{IN}}$$

Example) When the +INE2 terminal (pin 3) voltage is 1.79 V and the input current ( $I_{IN}$ ) is 6.0 A

$$\begin{aligned} RS1 &= \frac{+INE2}{20 \times I_{IN}} \\ &= \frac{1.79}{20 \times 6.0} \\ &= \underline{14.9 \text{ m}\Omega} \end{aligned}$$



## REFERENCE DATA

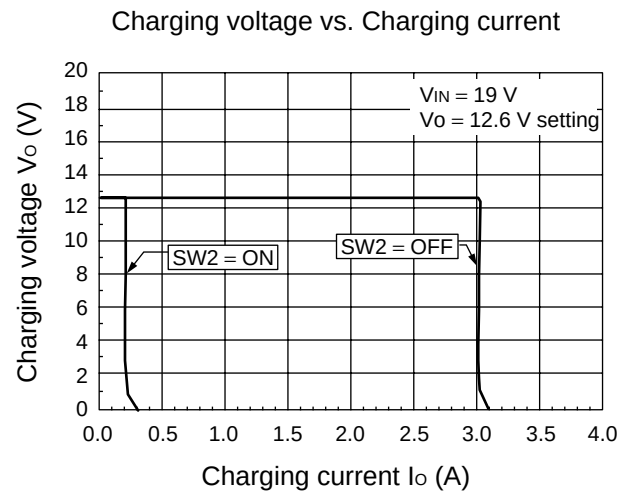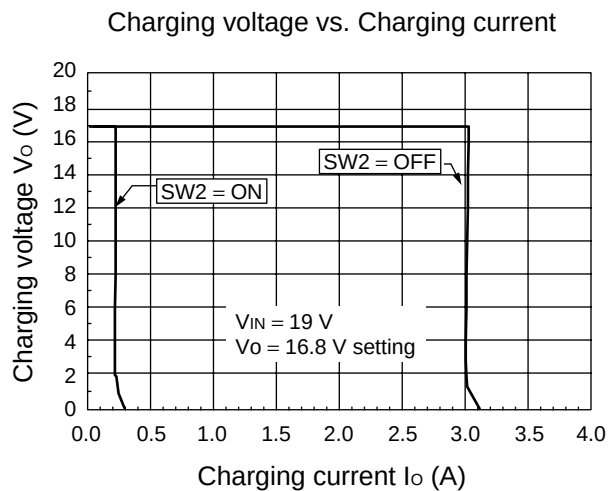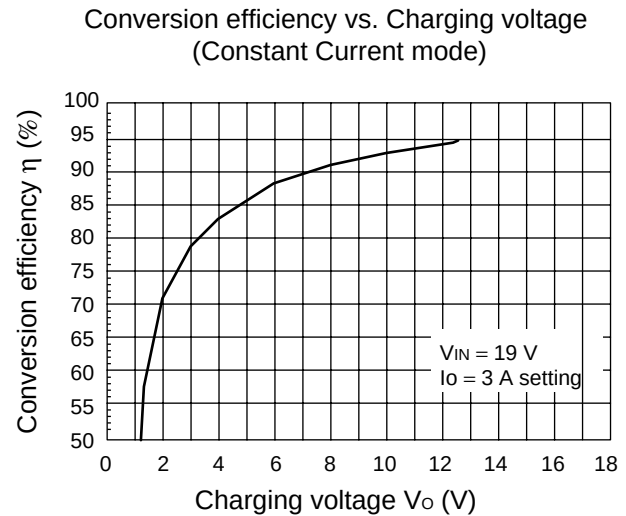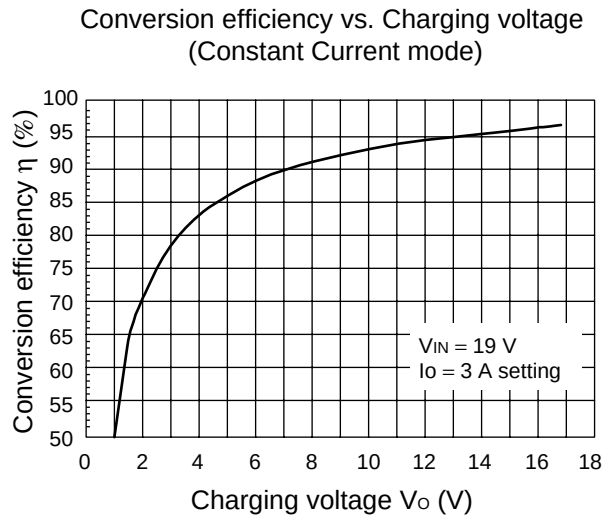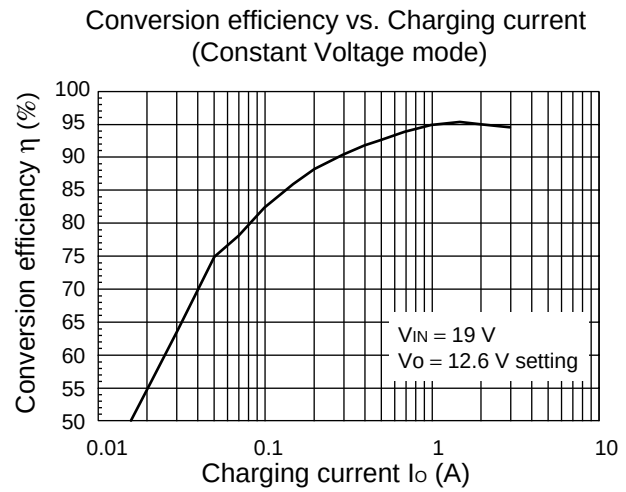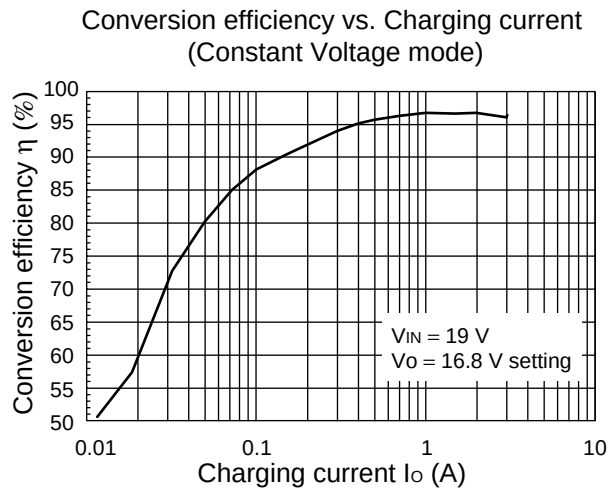


(Continued)

# MB39A125/126


[查询“MB39A125”供应商](#)

## Switching waveform (Constant Voltage Mode)

$V_O = 12.6\text{ V}$  setting

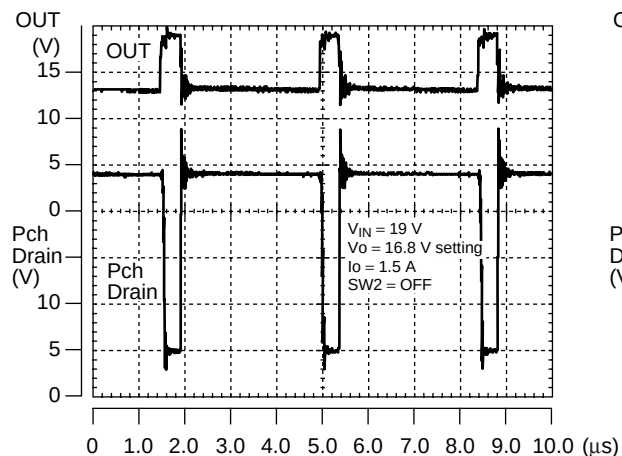


$V_O = 16.8\text{ V}$  setting

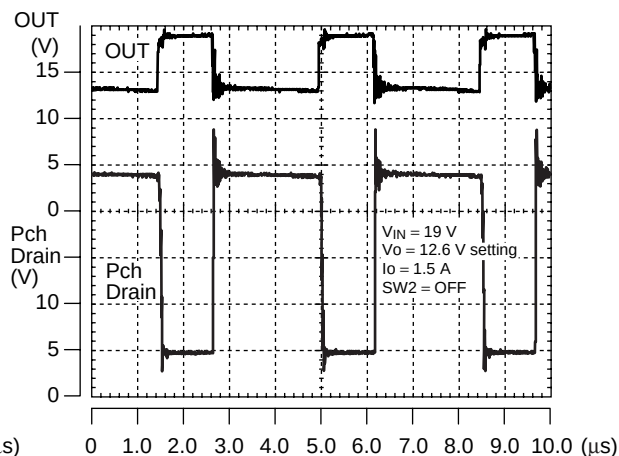


## Switching waveform (Constant Current Mode)

$V_O = 12.6\text{ V}$  setting

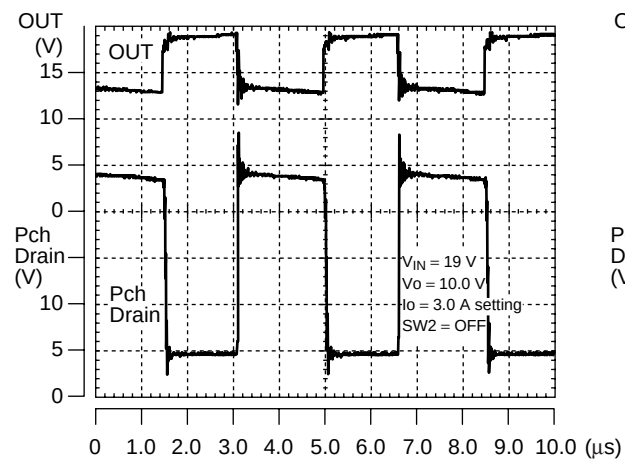


$V_O = 16.8\text{ V}$  setting

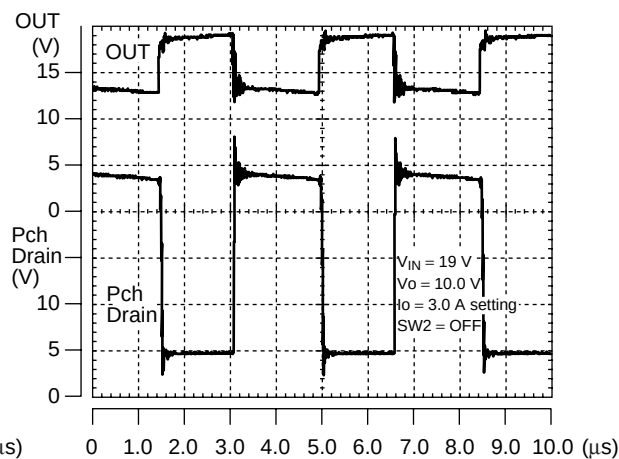


(Continued)

Soft-start operating waveform (Constant Current Mode)

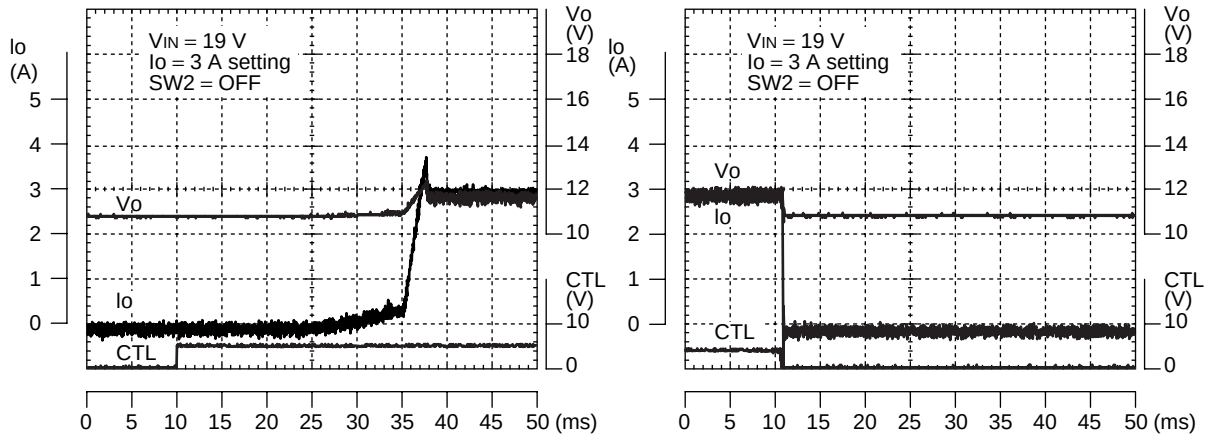

Soft-start operating waveform (Constant Voltage Mode)

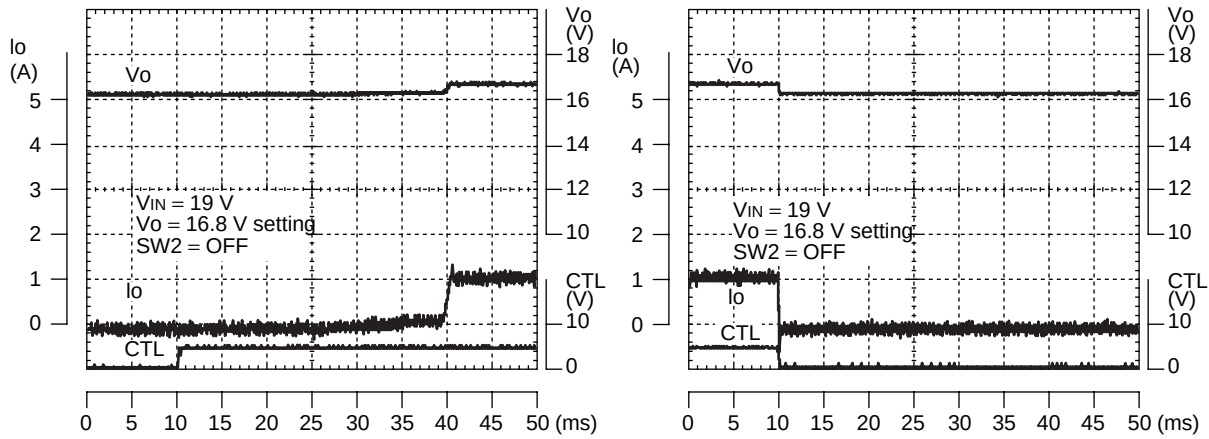


(Continued)

# MB39A125/126


[查询"MB39A125"供应商](#)

(Continued)


Load-step response operation waveform  
(C.V mode → C.C mode)

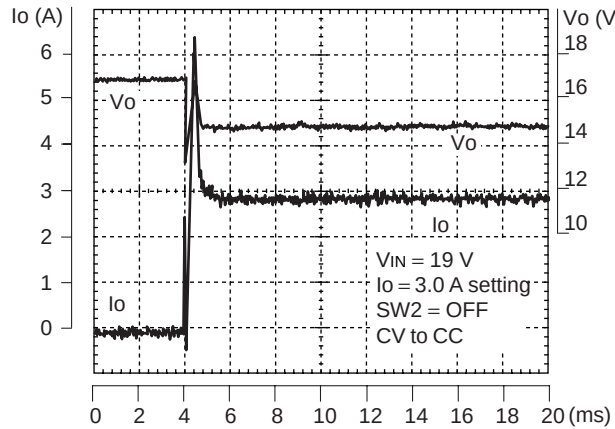


Load-step response operation waveform  
(C.C mode → C.V mode)

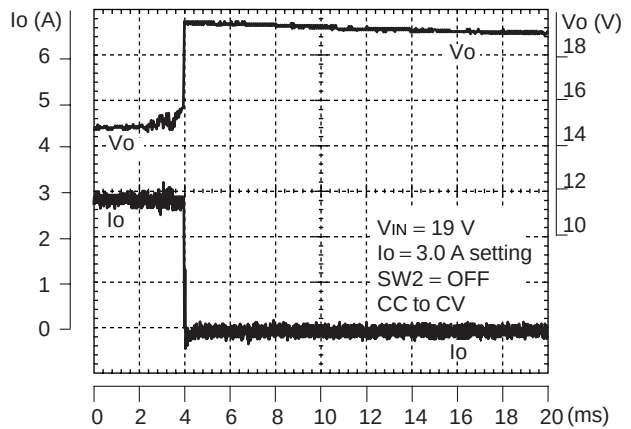

Load-step response operation waveform  
(C.V mode → C.V mode)

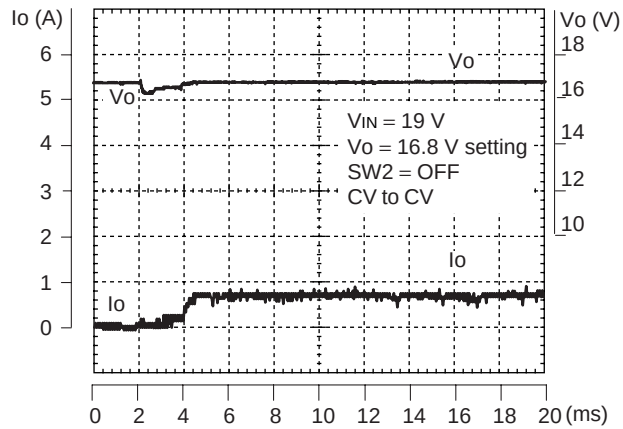

Load-step response operation waveform  
(C.V mode → C.V mode)

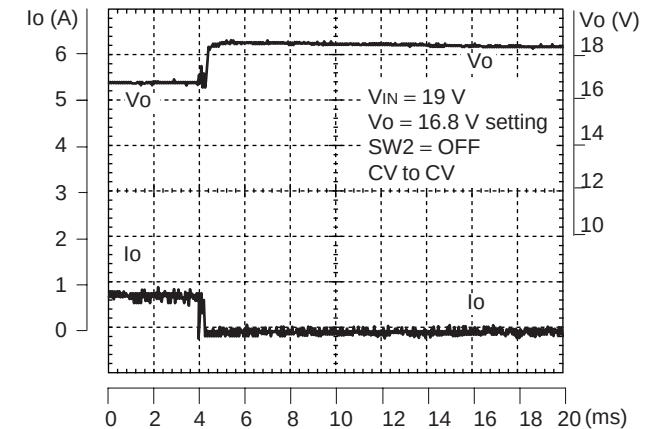

## ■ USAGE PRECAUTIONS

- Printed circuit board ground lines should be set up with consideration for common impedance.
- Take appropriate static electricity measures.
- Containers for semiconductor materials should have anti-static protection or be made of conductive material.
- After mounting, printed circuit boards should be stored and shipped in conductive bags or containers.
- Work platforms, tools, and instruments should be properly grounded.
- Working personnel should be grounded with resistance of 250 kΩ to 1 MΩ between body and ground.
- Do not apply negative voltages.
- The use of negative voltages below –0.3 V may create parasitic transistors on LSI lines, which can cause abnormal operation.

## ■ ORDERING INFORMATION

| Part number | Package                              | Remarks |
|-------------|--------------------------------------|---------|
| MB39A125PFV | 24-pin plastic SSOP<br>(FPT-24P-M03) |         |
| MB39A125WQN | 28-pin plastic QFN<br>(LCC-28P-M11)  |         |
| MB39A126PFV | 24-pin plastic SSOP<br>(FPT-24P-M03) |         |
| MB39A126WQN | 28-pin plastic QFN<br>(LCC-28P-M11)  |         |


# MB39A125/126

[查询"MB39A125"供应商](#)

## ■ PACKAGE DIMENSIONS

24-pin plastic SSOP  
(FPT-24P-M03)

Note 1) \*1 : Resin protrusion. (Each side : +0.15 (.006) Max).  
Note 2) \*2 : These dimensions do not include resin protrusion.  
Note 3) Pins width and pins thickness include plating thickness.  
Note 4) Pins width do not include tie bar cutting remainder.

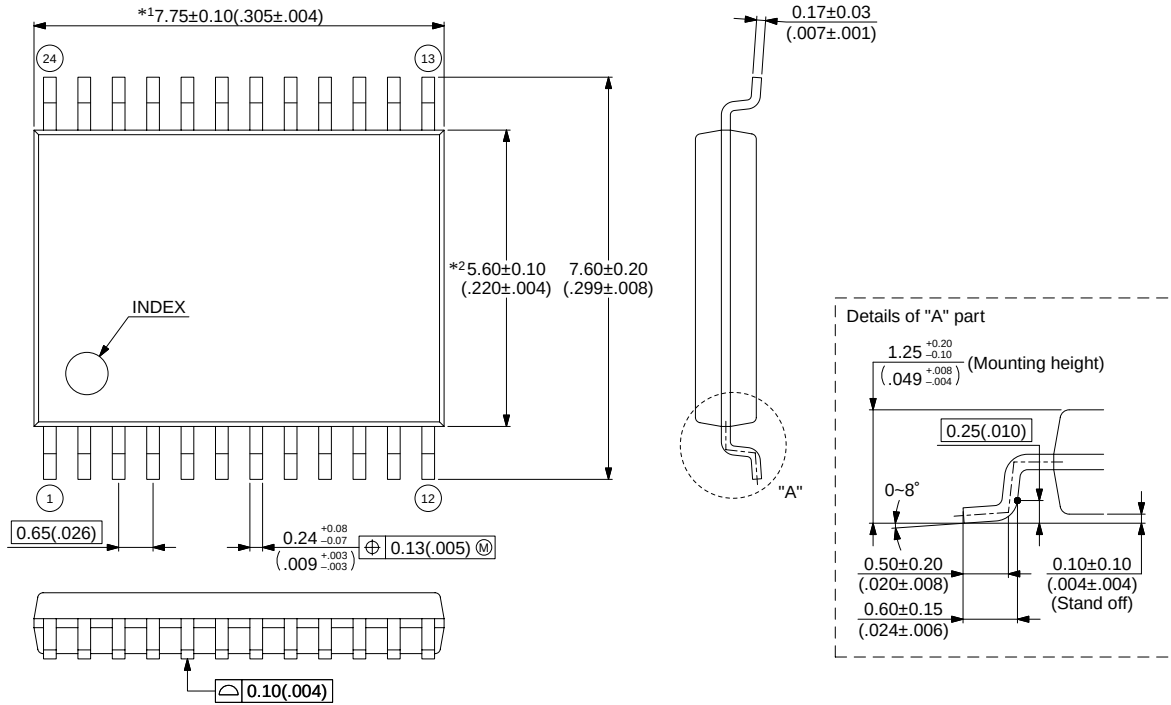

© 2003 FUJITSU LIMITED F24018S-c-4-5


Dimensions in mm (inches).

Note: The values in parentheses are reference values.

(Continued)

(Continued)

28-pin plastic QFN  
(LCC-28P-M11)

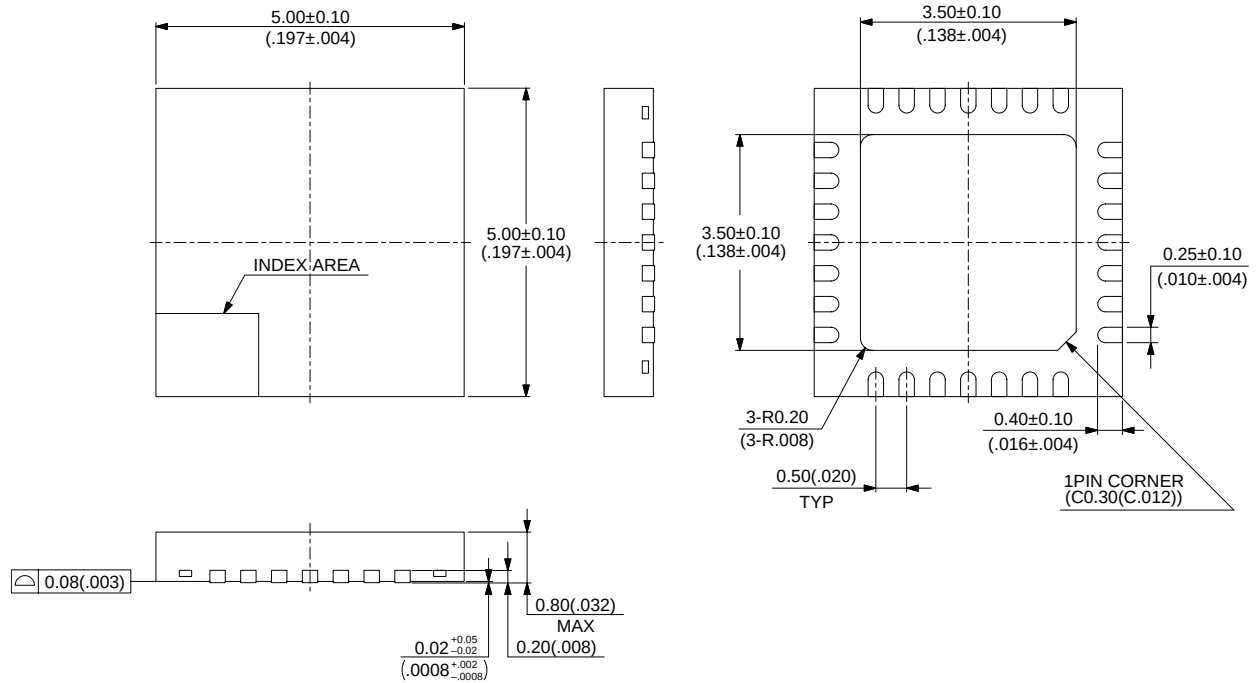

© 2004 FUJITSU LIMITED C28068Sc-2-1

Dimensions in mm (inches).

Note: The values in parentheses are reference values.

## FUJITSU LIMITED

All Rights Reserved.

The contents of this document are subject to change without notice. Customers are advised to consult with FUJITSU sales representatives before ordering.

The information, such as descriptions of function and application circuit examples, in this document are presented solely for the purpose of reference to show examples of operations and uses of Fujitsu semiconductor device; Fujitsu does not warrant proper operation of the device with respect to use based on such information. When you develop equipment incorporating the device based on such information, you must assume any responsibility arising out of such use of the information. Fujitsu assumes no liability for any damages whatsoever arising out of the use of the information.

Any information in this document, including descriptions of function and schematic diagrams, shall not be construed as license of the use or exercise of any intellectual property right, such as patent right or copyright, or any other right of Fujitsu or any third party or does Fujitsu warrant non-infringement of any third-party's intellectual property right or other right by using such information. Fujitsu assumes no liability for any infringement of the intellectual property rights or other rights of third parties which would result from the use of information contained herein.

The products described in this document are designed, developed and manufactured as contemplated for general use, including without limitation, ordinary industrial use, general office use, personal use, and household use, but are not designed, developed and manufactured as contemplated (1) for use accompanying fatal risks or dangers that, unless extremely high safety is secured, could have a serious effect to the public, and could lead directly to death, personal injury, severe physical damage or other loss (i.e., nuclear reaction control in nuclear facility, aircraft flight control, air traffic control, mass transport control, medical life support system, missile launch control in weapon system), or (2) for use requiring extremely high reliability (i.e., submersible repeater and artificial satellite).

Please note that Fujitsu will not be liable against you and/or any third party for any claims or damages arising in connection with above-mentioned uses of the products.

Any semiconductor devices have an inherent chance of failure. You must protect against injury, damage or loss from such failures by incorporating safety design measures into your facility and equipment such as redundancy, fire protection, and prevention of over-current levels and other abnormal operating conditions.

If any products described in this document represent goods or technologies subject to certain restrictions on export under the Foreign Exchange and Foreign Trade Law of Japan, the prior authorization by Japanese government will be required for export of those products from Japan.