

[查询"FAR-F6KB-1G9500-B4GJ"供应商](#)

Customer Name	Standard specification	FUJITSU MEDIA DEVICES LIMITED	
System	WCDMA-Tx(100/50)	DATE	Jul. 08, 2005
FMD Part Number	FAR-F6KB-1G9500-B4GJ	Version 1.0a	
Customer No.	-	Reference No.	-

Table 1 Electrical Specification


Parameter	Condition /MHz	Specification				Remarks
		Min.	Typ.	Max.	Unit	
Insertion Loss	1920-1980	-	2.1	3.0	dB	
Ripple	1920-1980	-	0.7	2.0	dB	
Attenuation	2110~ 2170	30	34	-	dB	
	3840~ 3960	20	46	-	dB	
	5760~ 5940	18	42	-	dB	
Input VSWR(bal)	1920-1980	-	2.1	2.5	-	
Output VSWR(unbal)	1920-1980	-	2.1	2.5	-	
Amplitude balance (S21/S31)	1920-1980	-2.0	-1.3/+1.0	+2.0	dB	
Phase balance ($\angle S21 - \angle S31 + 180$)	1920-1980	-10	-0.0/+4.0	+10	deg.	
Input Impedance	Balanced	100//18nH			ohm	
Output Impedance	Unbalanced	50			ohm	
Operating temperature		-30 ~ +85			°C	
Device size		1.4typ.x1.0typ. x0.5max.			mm	

[查询"FAR-F6KB-1G9500-B4GJ"供应商](#)

Customer Name	Standard specification	FUJITSU MEDIA DEVICES LIMITED	
System	WCDMA-Tx(100/50)	DATE	Jul. 08, 2005
FMD Part Number	FAR-F6KB-1G9500-B4GJ	Version 1.0a	
Customer No.	-	Reference No.	-

Dimensions


Device size: 1.4typ. x 1.0typ. x 0.5max.

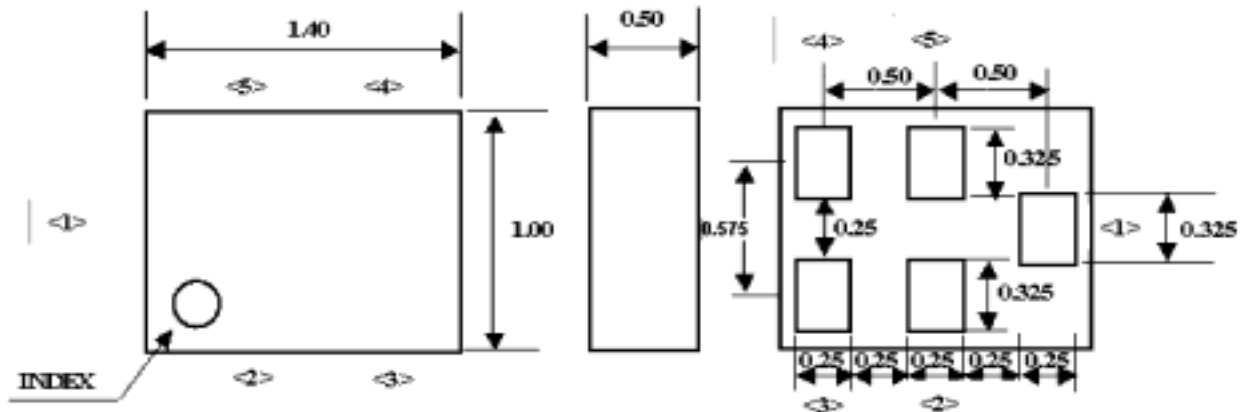

Pin Configuration

Pin No.	Pin name	Description
1	OUT	Unbalanced pin
2	GND	Ground
3	IN	Balanced pin
4	IN	Balanced pin
5	GND	Ground

Evaluation Circuit

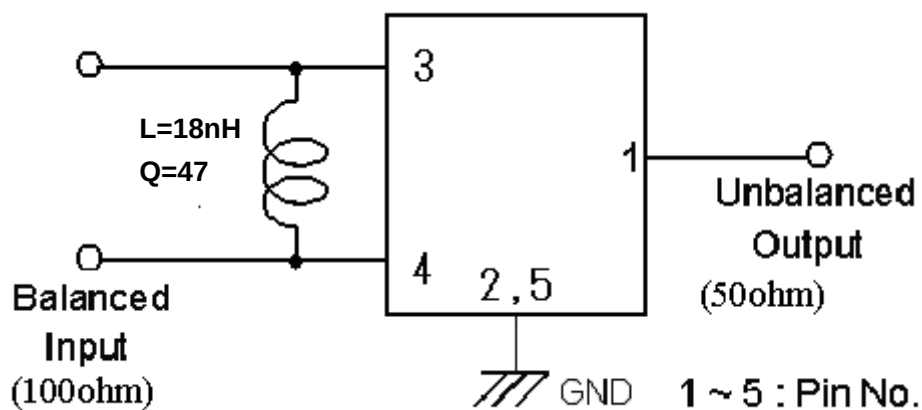

[查询"FAR-F6KB-1G9500-B4GJ"供应商](#)

Customer Name	Standard specification	FUJITSU MEDIA DEVICES LIMITED	
System	WCDMA-Tx(100/50)	DATE	Jul. 08, 2005
FMD Part Number	FAR-F6KB-1G9500-B4GJ	Version 1.0a	
Customer No.	-	Reference No.	-

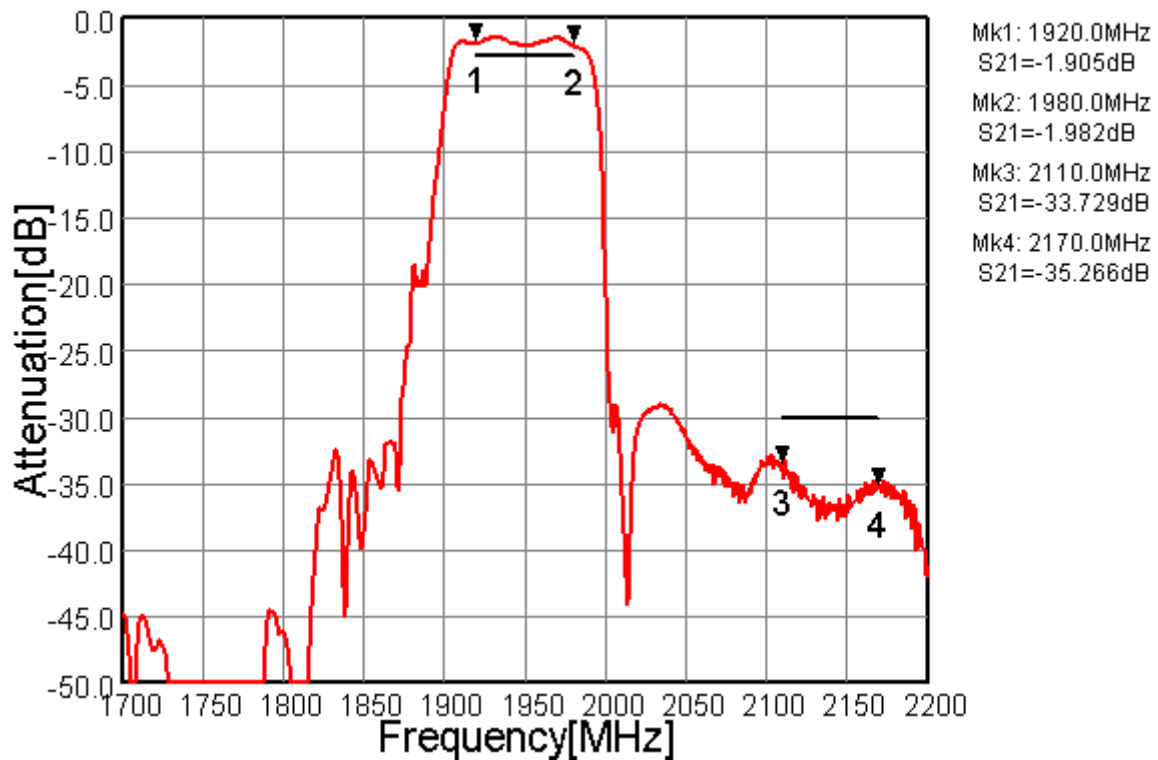


Fig.1 Pass-band Characteristics

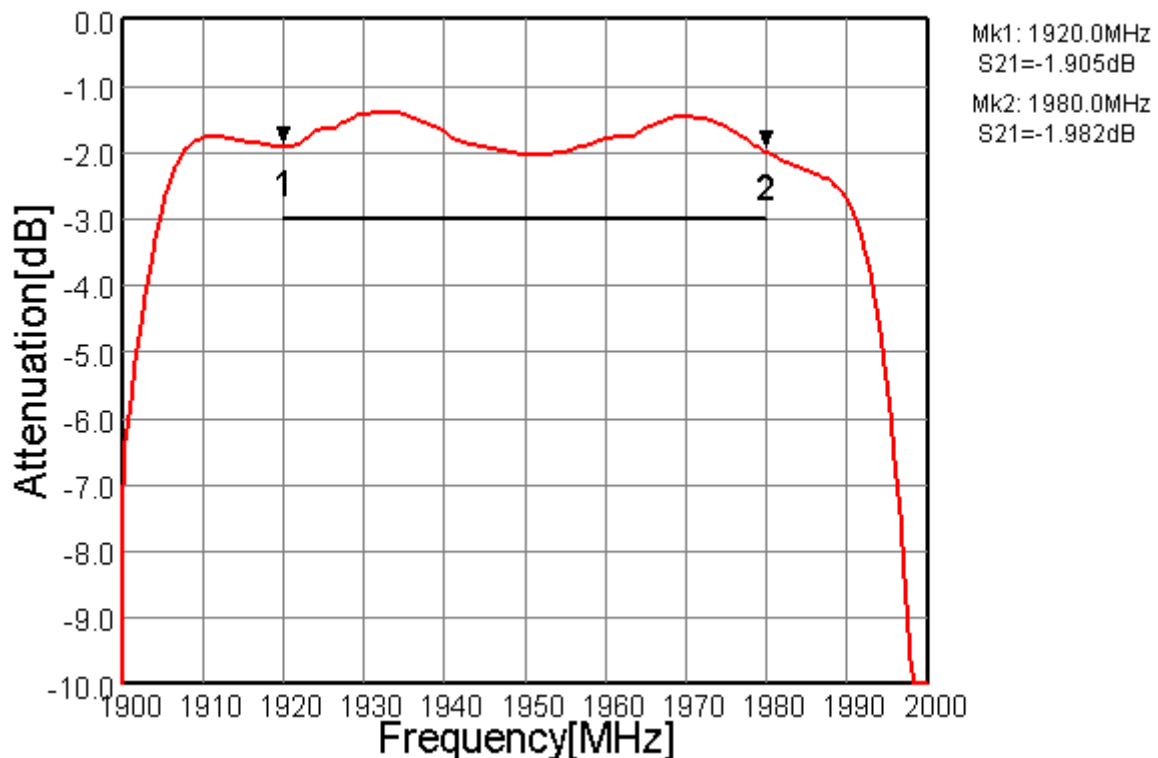


Fig.2 In-band Characteristics

[查询"FAR-F6KB-1G9500-B4GJ"供应商](#)

Customer Name	Standard specification	FUJITSU MEDIA DEVICES LIMITED	
System	WCDMA-Tx(100/50)	DATE	Jul. 08, 2005
FMD Part Number	FAR-F6KB-1G9500-B4GJ	Version 1.0a	
Customer No.	-	Reference No.	-

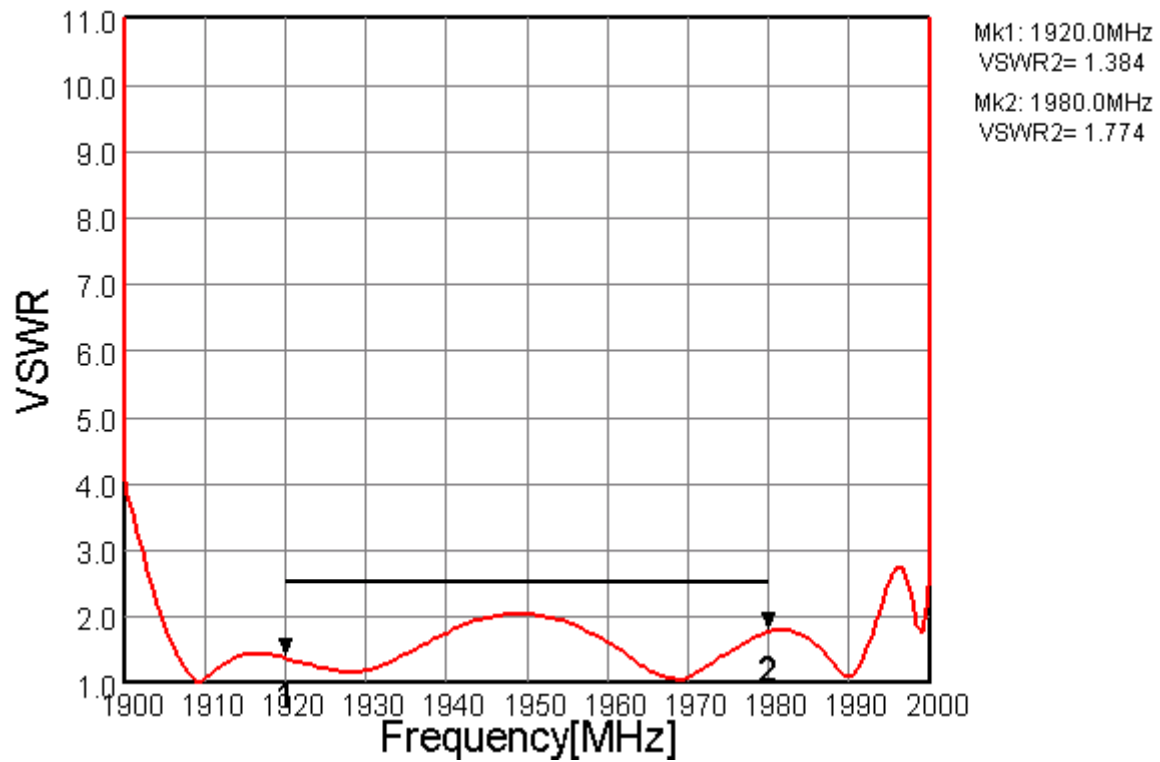


Fig.3 VSWR (Input)

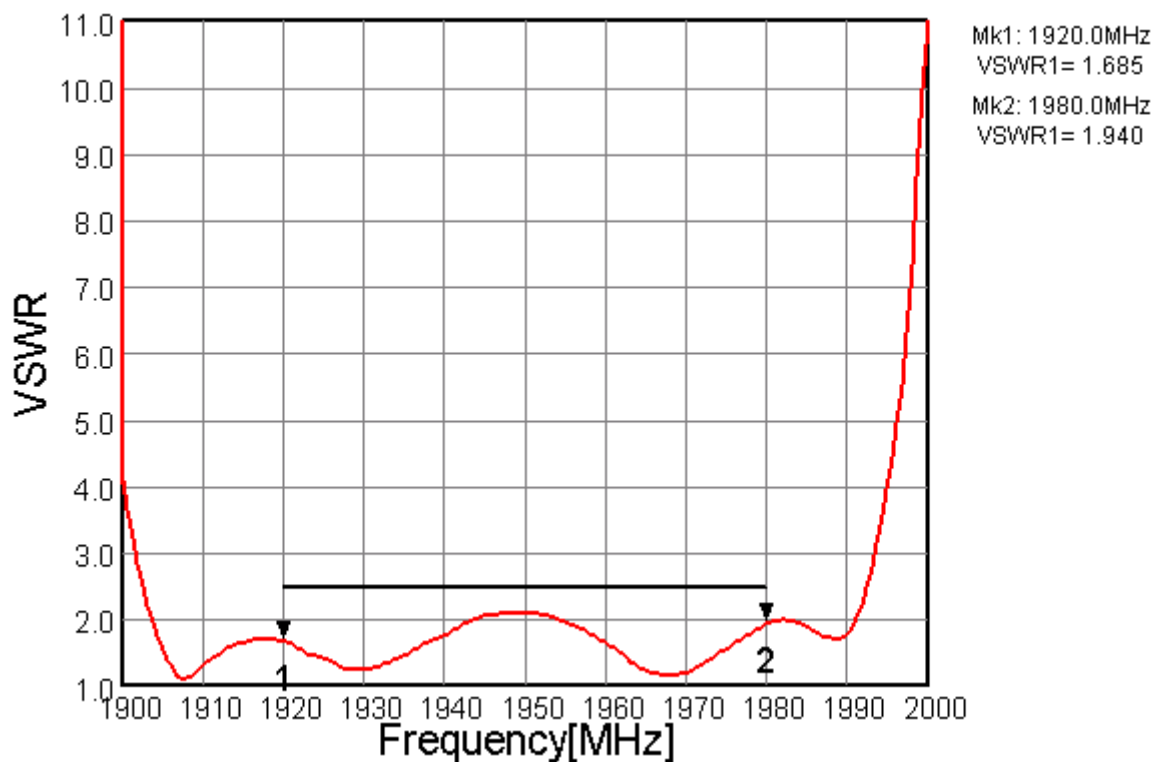


Fig.4 VSWR(Output)

[查询"FAR-F6KB-1G9500-B4GJ"供应商](#)

Customer Name	Standard specification	FUJITSU MEDIA DEVICES LIMITED	
System	WCDMA-Tx(100/50)	DATE	Jul. 08, 2005
FMD Part Number	FAR-F6KB-1G9500-B4GJ	Version 1.0a	
Customer No.	-	Reference No.	-

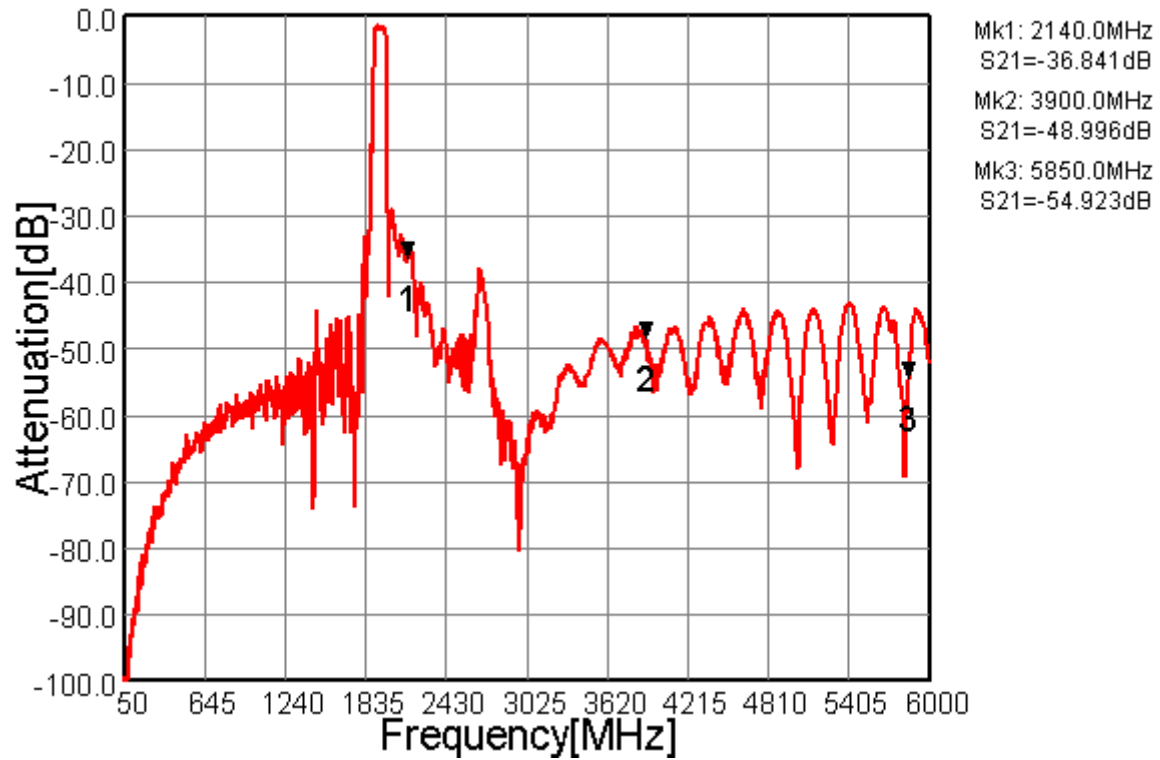


Fig.5 Wide-band Characteristics

[查询"FAR-F6KB-1G9500-B4GJ"供应商](#)

Customer Name	Standard specification	FUJITSU MEDIA DEVICES LIMITED	
System	WCDMA-Tx(100/50)	DATE	Jul. 08, 2005
FMD Part Number	FAR-F6KB-1G9500-B4GJ	Version 1.0a	
Customer No.	-	Reference No.	-

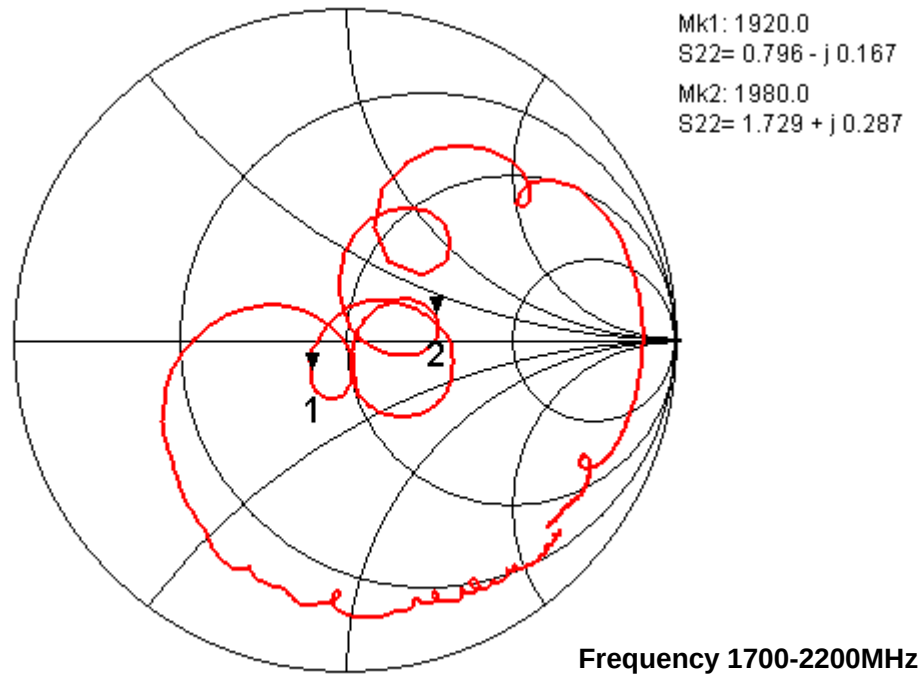


Fig.6 Impedance (Input)

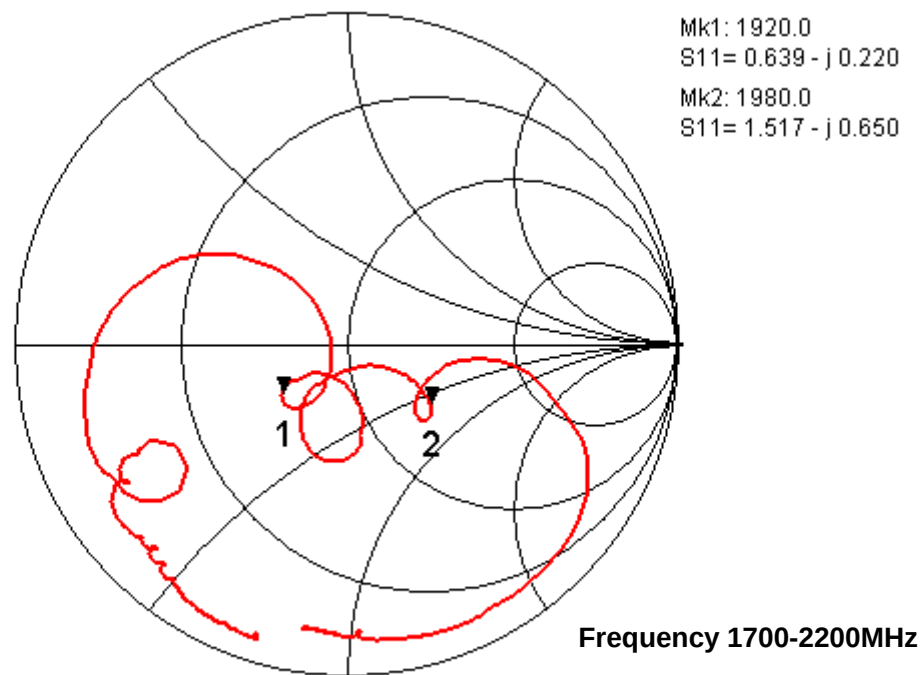


Fig.7 Impedance (Output)

[查询"FAR-F6KB-1G9500-B4GJ"供应商](#)

Customer Name	Standard specification	FUJITSU MEDIA DEVICES LIMITED	
System	WCDMA-Tx(100/50)	DATE	Jul. 08, 2005
FMD Part Number	FAR-F6KB-1G9500-B4GJ	Version 1.0a	
Customer No.	-	Reference No.	-

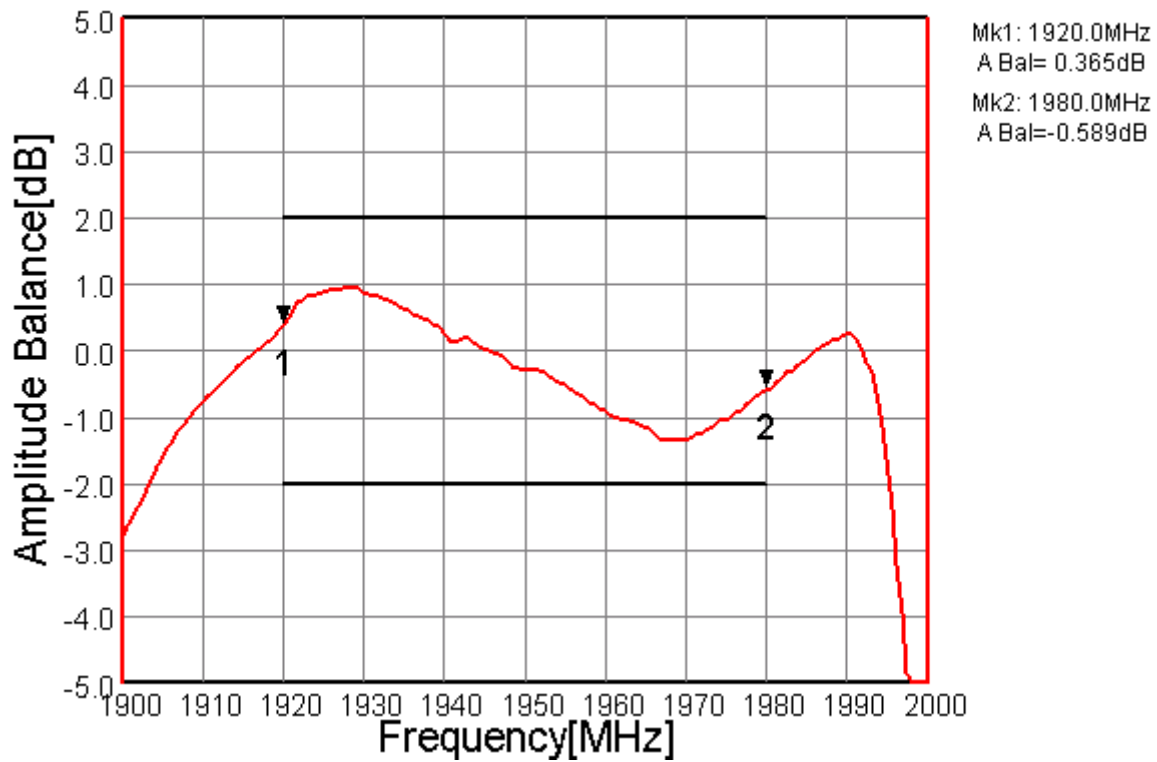


Fig.8 Amplitude Balance

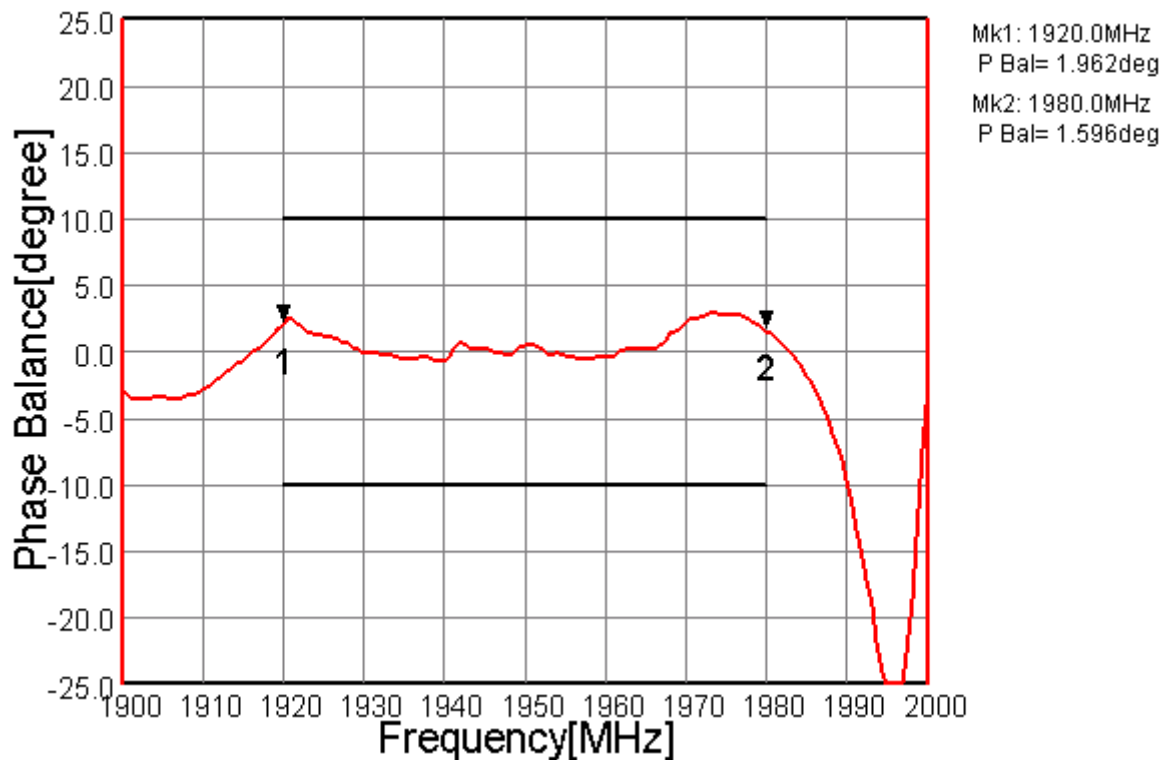


Fig.9 Phase Balance

This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download

Daily Updated Database

100% Free Datasheet Search Site

100% Free IC Replacement Search Site

Convenient Electronic Dictionary

Fast Search System

www.EEworld.com.cn